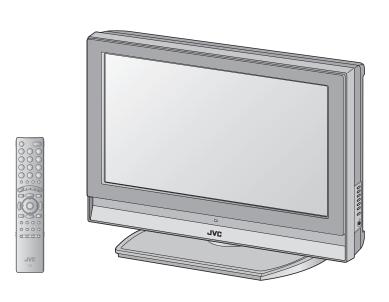


SERVICE MANUAL

LCD INTEGRATED DIGITAL TELEVISION

LT-26DX7BJ, LT-26DX7BJ/P, LT-26DX7SJ, LT-26DX7SJ/P, LT-26X70BU, LT-26X70BU/P, LT-26X70SU, LT-26X70SU/P, LT-32DX7BJ, LT-32DX7BJ/P, LT-32DX7SJ, LT-32DX7SJ/P, LT-32X70BU, LT-32X70SU/P








TABLE OF CONTENTS

1	PRECAUTION	. 1-3
	SPECIFIC SERVICE INSTRUCTIONS	
3	DISASSEMBLY	1-12
4	ADJUSTMENT	1-19
5	TROUBLESHOOTING	1-24

SPECIFICATION

		Contents				
	tems	LT-26DX7BJ LT-26DX7SJ	LT-26X70BU LT-26X70SU	LT-32DX7BJ LT-32DX7SJ	LT-32X70BU LT-32X70SU	
		$67.2 \text{ cm} \times 51.7 \text{ cm} \times 24.4$ $67.2 \text{ cm} \times 47.1 \text{ cm} \times 133.4$		80.0 cm × 59.1 cm × 24.4 cm [Included stand] 80.0 cm × 54.5 cm × 133.5 cm [TV only]		
Mass		14.7 kg [Included stand] 13.1 kg [TV only]	14.4 kg [Included stand] 12.8 kg [TV only]	17.9 kg [Included stand] 16.3 kg [TV only]	17.6 kg [Included stand] 16.0 kg [TV only]	
Power Input		AC220V - AC240 V, 50 H	z / 60 Hz			
Power Consumption	n	120 W (Standby: 0.6 W)		134 W (Standby: 0.6 W)	124 W (Standby: 0.6 W)	
TV RF System		CCIR (I)	CCIR (B/G, I, D/K, L)	CCIR (I)	CCIR (B/G, I, D/K, L)	
, <u> </u>	Digital	DVB-T		DVB-T		
Colour System	Ü	PAL NTSC 3.58/4.43 [EXT only]	PAL SECAM NTSC 3.58/4.43 [EXT only]	PAL NTSC 3.58/4.43 [EXT only]	PAL SECAM NTSC 3.58/4.43 [EXT only]	
Stereo System		NICAM (I)	NICAM (B/G, I, D/K, L), A2 (B/G, D/K)	NICAM (I)	NICAM (B/G, I, D/K, L), A2 (B/G, D/K)	
Receiving	Analog	UHF: 470 MHz - 862 MHz	Z			
Frequency	Digital	UHF: 474 MHz - 850 MHz		UHF: 474 MHz - 850 MHz		
Intermediate	VIF	38.9MHz (I)	38.9MHz (B/G, I, D/K, L)	38.9MHz (I)	38.9MHz (B/G, I, D/K, L)	
Frequency	SIF	32.9MHz (6.0MHz :I)	33.4MHz (5.5MHz :B/G) 32.9MHz (6.0MHz :I) 32.4MHz (6.5MHz :D/K)	32.9MHz (6.0MHz :I)	33.4MHz (5.5MHz :B/G) 32.9MHz (6.0MHz :I) 32.4MHz (6.5MHz :D/K)	
Colour Sub	PAL	4.43MHz				
Carrier Frequency	SECAM		4.40625MHz / 4.25MHz		4.40625MHz / 4.25MHz	
	NTSC	3.58MHz / 4.43MHz				
Teletext System	Analog	FLOF (Fastext level 2.5) WST(World Standard system)	FLOF (Fastext level 2.5) TOP WST(World Standard system)	FLOF (Fastext level 2.5) WST(World Standard system)	FLOF (Fastext level 2.5) TOP WST(World Standard system)	
F	Digital	MHEG 5 UK profile		MHEG 5 UK profile		
LCD panel	Digital	26V-inch wide aspect (16	: 0)	32V-inch wide aspect (16	3 · 0)	
Screen Size		Diagonal : 66 cm (H: 57.6 cm × V: 32.4 cm) Diagonal : 80 cm (H: 69.7 cm × V: 39.2 cm)				
Display Pixels			/ertical : 768 dots (W-XGA		7 CIII × V. 39.2 CIII)	
Audio Power Output	t	10 W + 10 W	reflical. 100 dots (W-XOF	N)		
Speaker		5.0 cm round × 2				
Aerial terminal (VHI		75 Ω unbalanced, coaxia	1			
EXT-1 / EXT-2 (Inp	,	21-pin Euro connector (SCART socket) × 2				
EXT-3 (Input)		Mini-DIN 4 pin × 1				
. , ,	Video Audio	Y: 1 V (p-p), Positive (Negative sync provided), 75 Ω C: 0.286 V (p-p) (Burst signal), 75 Ω 1 V (p-p), Positive (Negative sync provided), 75 Ω , RCA pin jack \times 1 500 mV (rms), High impedance, RCA pin jack \times 2				
EXT-4 (Input)	750p / 1125i 625p / 525p / 625i / 525i	RCA pin jack \times 3 i Y : 1 V (p-p) (Sync signal: ± 0.35 V(p-p), 3-value sync.), 75Ω Pb/Pr : ± 0.35 V(p-p), 75Ω i Y : 1 V (p-p), Positive (Negative sync provided), 75Ω Cb/Cr : 0.7 V(p-p), 75Ω 0 500 mV(rms) (-4dBs), high impedance, RCA pin jack \times 2				
EXT-5 / EXT-6		HDMI 2-row 19pin conne				
(HDMI Input)		(Digital-input terminal is not compatible with picture signals of personal computer) Digital: HDMI 2-row 19pin connector × 2 Anarog: 500mV(rms) (-4dBs), high impedance, RCA pin jack × 2				
PC (RGB) Input Audio output		D-sub 15 pin × 1 R/G/B: 0.7 V (p-p), 75Ω HD / VD: 1 V (p-p) to 5 V (p-p), high impedance < Available signal > VGA: 640 pixels × 480 pixels (Horizontal: 31.5 kHz / Vertical: 60 Hz) XGA: 1024 pixels × 768 pixels (Horizontal: 48.4 kHz / Vertical: 60 Hz) 500 mV (rms), Low impedance, RCA pin jack × 2				
Headphone		3.5 mm stereo mini jack × 1				
Remote Control Un	it	RM-C1905S	RM-C1900S	RM-C1905S (AAA/R03 dry cell battery × 2)	RM-C1900S (AAA/R03 dry cell battery × 2)	

Design & specifications are subject to change without notice.

SECTION 1 PRECAUTION

1.1 SAFETY PRECAUTIONS [EXCEPT FOR UK]

- (1) The design of this product contains special hardware, many circuits and components specially for safety purposes. For continued protection, no changes should be made to the original design unless authorized in writing by the manufacturer. Replacement parts must be identical to those used in the original circuits. Service should be performed by qualified personnel only.
- (2) Alterations of the design or circuitry of the products should not be made. Any design alterations or additions will void the manufacturer's warranty and will further relieve the manufacturer of responsibility for personal injury or property damage resulting therefrom.
- (3) Many electrical and mechanical parts in the products have special safety-related characteristics. characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in the parts list of Service manual. Electrical components having such features are identified by shading on the schematics and by (Δ) on the parts list in Service manual. The use of a substitute replacement which does not have the same safety characteristics as the recommended replacement part shown in the parts list of Service manual may cause shock, fire, or other hazards.
- (4) Don't short between the LIVE side ground and ISOLATED (NEUTRAL) side ground or EARTH side ground when repairing.

Some model's power circuit is partly different in the GND. The difference of the GND is shown by the LIVE : (\bot) side GND, the ISOLATED (NEUTRAL) : ($\stackrel{\bot}{=}$) side GND and EARTH : ($\stackrel{\textcircled{}}{=}$) side GND.

- Don't short between the LIVE side GND and ISOLATED (NEUTRAL) side GND or EARTH side GND and never measure the LIVE side GND and ISOLATED (NEUTRAL) side GND or EARTH side GND at the same time with a measuring apparatus (oscilloscope etc.). If above note will not be kept, a fuse or any parts will be broken.
- (5) When service is required, observe the original lead dress. Extra precaution should be given to assure correct lead dress in the high voltage circuit area. Where a short circuit has occurred, those components that indicate evidence of overheating should be replaced. Always use the manufacturer's replacement components.

(6) Isolation Check (Safety for Electrical Shock Hazard)

After re-assembling the product, always perform an isolation check on the exposed metal parts of the cabinet (antenna terminals, video/audio input and output terminals, Control knobs, metal cabinet, screw heads, earphone jack, control shafts, etc.) to be sure the product is safe to operate without danger of electrical shock.

a) Dielectric Strength Test

The isolation between the AC primary circuit and all metal parts exposed to the user, particularly any exposed metal part having a return path to the chassis should withstand a voltage of 3000V AC (r.m.s.) for a period of one second. (. . . . Withstand a voltage of 1100V AC (r.m.s.) to an appliance rated up to 120V, and 3000V AC (r.m.s.) to an appliance rated 200V or more, for a period of one second.) This method of test requires a test equipment not generally found in the service trade.


b) Leakage Current Check

Plug the AC line cord directly into the AC outlet (do not use a line isolation transformer during this check.). Using a "Leakage Current Tester", measure the leakage current from each exposed metal part of the cabinet, particularly any exposed metal part having a return path to the chassis, to a known good earth ground (water pipe, etc.). Any leakage current must not exceed 0.5mA AC (r.m.s.). However, in tropical area, this must not exceed 0.2mA AC (r.m.s.).

Alternate Check Method

Plug the AC line cord directly into the AC outlet (do not use a line isolation transformer during this check.). Use an AC voltmeter having 1000Ω per volt or more sensitivity in the following manner. Connect a 1500Ω 10W resistor paralleled by a $0.15\mu F$ AC-type capacitor between an exposed metal part and a known good earth ground (water pipe, etc.). Measure the AC voltage across the resistor with the AC voltmeter. Move the resistor connection to each exposed metal part, particularly any exposed metal part having a return path to the chassis, and measure the AC voltage across the resistor. Now, reverse the plug in the AC outlet and repeat each measurement. Any voltage measured must not exceed 0.75V AC (r.m.s.). This corresponds to 0.5mA AC (r.m.s.).

However, in tropical area, this must not exceed 0.3V AC (r.m.s.). This corresponds to 0.2mA AC (r.m.s.).



1.2 SAFETY PRECAUTIONS [FOR UK]

- (1) The design of this product contains special hardware and many circuits and components specially for safety purposes. For continued protection, no changes should be made to the original design unless authorized in writing by the manufacturer. Replacement parts must be identical to those used in the original circuits. Service should be performed by qualified personnel only.
- (2) Alterations of the design or circuitry of the product should not be made. Any design alterations or additions will void the manufacturer's warranty and will further relieve the manufacturer of responsibility for personal injury or property damage resulting therefrom.
- (3) Many electrical and mechanical parts in the product have special safety-related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessary be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in the Parts List of Service Manual. Electrical components having such features are identified by shading on the schematics and by (\(\Delta \)) on the Parts List in the Service Manual. The use of a substitute replacement which does not have the same safety characteristics as the recommended replacement part shown in the Parts List of Service Manual may cause shock, fire, or other hazards.
- (4) The leads in the products are routed and dressed with ties, clamps, tubing's, barriers and the like to be separated from live parts, high temperature parts, moving parts and / or sharp edges for the prevention of electric shock and fire hazard. When service is required, the original lead routing and dress should be observed, and it should be confirmed that they have been returned to normal, after re-assembling.


WARNING

- (1) The equipment has been designed and manufactured to meet international safety standards.
- (2) It is the legal responsibility of the repairer to ensure that these safety standards are maintained.
- (3) Repairs must be made in accordance with the relevant safety standards.
- (4) It is essential that safety critical components are replaced by approved parts.
- (5) If mains voltage selector is provided, check setting for local voltage.

1.3 INSTALLATION


1.3.1 HEAT DISSIPATION

If the heat dissipation vent behind this unit is blocked, cooling efficiency may deteriorate and temperature inside the unit will rise. The temperature sensor that protects the unit will be activated when internal temperature exceeds the pre-determined level and power will be turned off automatically. Therefore, please make sure pay attention not to block the heat dissipation vent as well as the ventilation outlet behind the unit and ensure that there is room for ventilation around it.



1.3.2 INSTALLATION REQUIREMENTS


Ensure that the minimal distance is maintained, as specified below, between the unit with and the surrounding walls, as well as the floor etc.Install the unit on stable flooring or stands.Take precautionary measures to prevent the unit from tipping in order to protect against accidents and earthquakes.



1.3.3 INSTALLATION REQUIREMENTS

To ensure safety in an emergency such as an earthquake, and to prevent accidents, ensure that measures are taken to prevent the TV dropping or falling over.

Tie commercially available tough cord(s) to the hooks in the back of the TV, and fix the TV to solid walls or columns.

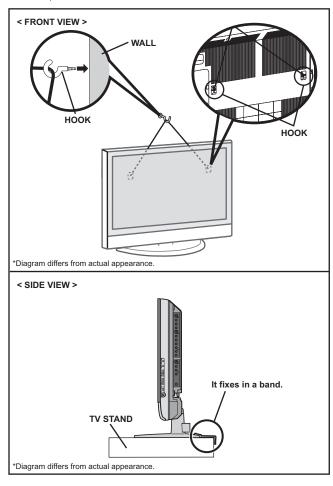

1.3.4 NOTES ON HANDLING

- (1) WHEN TAKING UNIT OUT OF A PACKING CASE When taking the unit out of a packing case, do not grasp the upper part of the unit. If you take the unit out while grasping the upper part, the LCD PANEL may be damaged because of a pressure. Instead of grasping the upper part, put your hands on the lower backside or sides of the unit.
- (2) AS FOR PRESSING OR TOUCHING A SPEAKER Be careful not to press the opening of the speaker in the lower part of the unit and around them since the decorative sheet on the surface of the openings may be deformed.

1.4 HANDLING LCD PANEL

1.4.1 PRECAUTIONS FOR TRANSPORTATION

When transporting the unit, pressure exerted on the internal LCD panel due to improper handling (such as tossing and dropping) may cause damages even when the unit is carefully packed. To prevent accidents from occurring during transportation, pay careful attention before delivery, such as through explaining the handling instructions to transporters.

Ensure that the following requirements are met during transportation, as the LCD panel of this unit is made of glass and therefore fragile:

- (1) USE A SPECIAL PACKING CASE FOR THE LCD PANEL When transporting the LCD panel of the unit, use a special packing case (packing materials). A special packing case is used when a LCD panel is supplied as a service spare part.
- (2) ATTACH PROTECTION SHEET TO THE FRONT Since the front (display part) of the panel is vulnerable, attach the protection sheet to the front of the LCD panel before transportation. Protection sheet is used when a LCD panel is supplied as a service spare part.
- (3) AVOID VIBRATIONS AND IMPACTS
 The unit may be broken if it is toppled sideways even when properly packed. Continuous vibration may shift the gap of the panel, and the unit may not be able to display images properly. Ensure that the unit is carried by at least 2 persons and pay careful attention not to exert any vibration or impact on it.
- (4) DO NOT PLACE EQUIPMENT HORIZONTALLY Ensure that it is placed upright and not horizontally during transportation and storage as the LCD panel is very vulnerable to lateral impacts and may break. During transportation, ensure that the unit is loaded along the traveling direction of the vehicle, and avoid stacking them on one another. For storage, ensure that they are stacked in 2 layers or less even when placed upright.

1.4.2 OPTICAL FILTER (ON THE FRONT OF THE LCD PANEL)

- (1) Avoid placing the unit under direct sunlight over a prolonged period of time. This may cause the optical filter to deteriorate in quality and COLOUR.
- (2) Clean the filter surface by wiping it softly and lightly with a soft and lightly fuzz cloth (such as outing flannel).
- (3) Do not use solvents such as benzene or thinner to wipe the filter surface. This may cause the filter to deteriorate in quality or the coating on the surface to come off. When cleaning the filter, usually use the neutral detergent diluted with water. When cleaning the dirty filter, use water-diluted ethanol.
- (4) Since the filter surface is fragile, do not scratch or hit it with hard materials. Be careful enough not to touch the front surface, especially when taking the unit out of the packing case or during transportation.

1.4.3 PRECAUTIONS FOR REPLACEMENT OF EXTERIOR PARTS

Take note of the following when replacing exterior parts (REAR COVER, FRONT PANEL, etc.):


- (1) Do not exert pressure on the front of the LCD panel (filter surface). It may cause irregular COLOUR.
- (2) Pay careful attention not to scratch or stain the front of the LCD panel (filter surface) with hands.
- (3) When replacing exterior parts, the front (LCD panel) should be placed facing downward. Place a mat, etc. underneath to avoid causing scratches to the front (filter surface).

SECTION 2 SPECIFIC SERVICE INSTRUCTIONS

2.1 SYSTEM SETTEING

Be sure to carry out the following operation at the end of the procedure.

- (1) Press the **[INFORMATION]** key and **[MUTING]** key simultaneously, then enter the SERVICE MODE.
- (2) When the Main Menu is displayed, press [2] key to enter the self check mode.
- (3) Turn off the power by pressing the [POWER] key on the remote control unit.

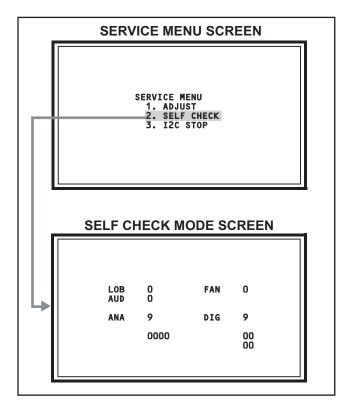

2.2 FEATURES

DVB-T [DX7 series only]

This TV can receive both DVB-T (Digital terrestrial broadcasting) and Analogue terrestrial broadcasting.

D.I.S.T. (Digital Image Scaling Technology)

This system uses line interpolation to double the number of scanning lines and achieve high resolution, flicker-free picture.

Colour Management

This function ensures dull colours are compensated to produce natural hues.

Picture Management

This function makes it easier to see the dark areas when a picture has many dark areas, and makes it easier to see the bright areas when a picture has many bright areas.

Smart Picture

This function detects the APL (Average Picture Level) and adjusts the contrast suitable for what you are watching.

DIGITAL VNR

This function cuts down the amount of noise in the original picture.

MPEG Noise Reduction

This function effects the block noise removal and mosquito NR simultaneously.

MaxxBass

This function emphasizes the bass sound.


3D Cinema Sound

You can enjoy sounds with a widerambience.

2.3 MAIN DIFFERENCE LIST

ltem	LT-26DX7BJ LT-26DX7BJ/P LT-32DX7BJ LT-32DX7BJ/P	LT-26DX7SJ LT-26DX7SJ/P LT-32DX7SJ LT-32DX7SJ/P	LT-26X70BU LT-26X70BU/P LT-32X70BU LT-32X70BU/P	LT-26X70SU LT-26X70SU/P LT-32X70SU LT-32X70SU/P
Paint colour	Silver & Black	Silver	Silver & Black	Silver
DIGITAL TUNER	YES	←	NO	←
LED colour	Green & Red	←	Blue	←
RS-232C CONNECTOR	YES	←	NO	←
Plug Type	UK Type (3-pins)	←	EU Type (2-pins)	←
Remote Control unit	RM-C1905S	←	RM-C1900S	←


2.4 HOW TO IDENTIFY MODELS

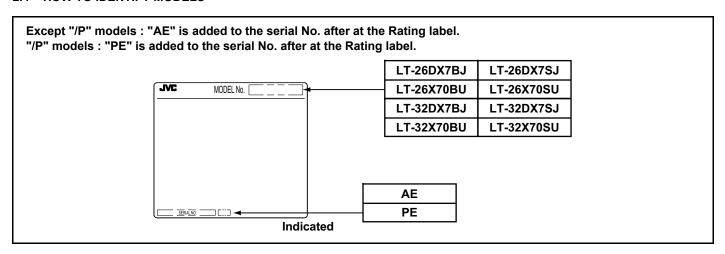

2.5 21-PIN EURO CONNECTOR (SCART) : EXT-1 / EXT-2

Pin No.	Signal designation	Matching value	EXT-1	EXT-2
1	AUDIO R output	500mV(rms) (Nominal), Low impedance	Used (TV OUT)	Used (LINE OUT)
2	AUDIO R input	500mV(rms) (Nominal), High impedance	Used (R1)	Used (R2)
3	AUDIO L output	500mV(rms) (Nominal), Low impedance	Used (TV OUT)	Used (LINE OUT)
4	AUDIO GND		Used	Used
5	GND (B)		Used	Used
6	AUDIO L input	500mV(rms) (Nominal), High impedance	Used (L1)	Used (L2)
7	B input	700mV _(B-W) , 75Ω	Used	Used
8	FUNCTION SW (SLOW SW)	Low : 0V-3V High : 8V-12V, High impedance	Used	Used
9	GND (G)		Used	Used
10	SCL / T-V LINK		Not used	Used (SCL2 / TV-LINK)
11	G input	700mV _(B-W) , 75Ω	Used	Used
12	SDA		Not used	Used (SDA2)
13	GND (R)		Used	Used
14	GND (YS)		Used	Not used
15	R / C input	$\begin{array}{l} \text{R}: 700\text{mV}_{\text{(B-W)}}, 75\Omega \\ \text{C}: 300\text{mV}_{\text{(P-P)}}, 75\Omega \end{array}$	Used (R)	Used (C2/R)
16	Ys input (FAST SW)	Low : 0V-0.4V, High : 1V-3V, 75Ω	Used	Used
17	GND (VIDEO output)		Used	Used
18	GND (VIDEO input)		Used	Used
19	VIDEO output	$1V_{(P-P)}$ (Negative sync), 75Ω	Used (TV OUT)	Used (LINE OUT)
20	VIDEO / Y input	$1V_{(P-P)}$ (Negative sync), 75Ω	Used	Used
21	COMMON GND		Used	Used

(P-P= Peak to Peak, B-W= Blanking to white peak)



2.6 TECHNICAL INFORMATION

2.6.1 LCD PANEL

This unit uses the flat type panel LCD (Liquid Crystal Display) panel that occupies as little space as possible, instead of the conventional CRT (Cathode Ray Tube), as a display unit.

Since the unit has the two polarizing filter that are at right angles to each other, the unit adopts "normally black" mode, where light does not pass through the polarizing filter and the screen is black when no voltage is applied to the liquid crystals.

2.6.1.1 SPECIFICATIONS

The following table shows the specifications of this unit.

и	Specifications				
Item	26V-TYPE LCD PANEL UNIT	32V-TYPE LCD PANEL UNIT			
Maximum dimensions (W × H × D)	626 mm × 373 mm × 52 mm	760 mm × 450 mm × 50 mm			
Weight	4.7 kg	7.0 kg			
Effective screen size	Diagonal: 660 mm (H: 576 mm × V: 324 mm)	Diagonal: 800 mm (H: 697 mm × V: 392 mm)			
Aspect ratio	16 : 9				
Drive device / system	a-Si-TFT active matrix system				
Resolution	Horizontally 1366 × Vertically 768 × RGB < W-X	GA > 3147264 dots in total			
Pixel pitch (pixel size)	Horizontally: 0.4215 mm, Vertically: 0.4215mm	Horizontally: 0.51075 mm, Vertically: 0.51075mm			
Displayed colour	16777216 colours 256 colours for R G and B				
Brightness	500cd/m2				
Contrast ratio	1000 : 1	1200 : 1			
Response time (Tr + Tf)	less than 14 ms				
View angle (Horizontally)	178°				
View angle (Vertically)	178°				
Surface polarizer	Anti-Glare type Low reflective coat				
Colour filter	Vertical stripe				
Backlight	U-type Cold cathode fluorescent lamp × 8	Direct-type Cold cathode fluorescent lamp ×16			
Power supply voltage in LCD	6.5 V				
Power supply voltage in inverter	24 V				
Panel interface system	LVDS (Low Voltage Differential Signaling)				

2.6.1.2 **PIXEL FAULT**

There are three pixel faults - bright fault, dark fault and flicker fault - that are respectively defined as follows.

■ BRIGHT FAULT

In this pixel fault, a cell that should not light originally is lighting on and off.

For checking this pixel fault, input ALL BLACK SCREEN and find out the cell that is lighting on and off.

■ DARK FAULT

In this pixel fault, a cell that should light originally is not lighting or lighting with the brightness twice as brighter as originally lighting. For checking this pixel fault, input 100% of each R/G/B colour and find out the cell that is not lighting.

■ FLICKER FAULT

In the pixel fault, a cell that should light originally or not light originally is flashing on and off.

For checking this pixel fault, input ALL BLACK SCREEN signal or 100% of each RGB colour and find out the cell that is flashing on and off.

2.6.2 MAIN CPU PIN FUNCTION [IC7301 : DIGITAL PWB]

Pin	Pin name	I/O	Function	Pin	Pin name	I/O	Function
1	TCK	0	Test purpose	65	D2	I/O	Program ROM data for main CPU
2	TMS	ı	Test purpose	66	D12	I/O	Program ROM data for main CPU
3	TDI	ı	Test purpose	67	D10	I/O	Program ROM data for main CPU
4	TDO	0	Test purpose	68	VSS33	-	GND
5	P2.8	0	TV, Subtitle/OTHER	69	VDD33	ı	3.3V
6	P2.9	0	Blue for OSD	70	D4	I/O	Program ROM data for main CPU
7	P2.10	0	Blue for OSD	71	D3		Program ROM data for main CPU
8	P2.11	0	Blue for OSD	72	D11	I/O	Program ROM data for main CPU
9	P2.12	0	Blue for OSD	73	RSTIN	ı	Reset
10	P2.13	0	Blue for OSD	74	POWER	0	Sleep state release for chassis CPU [Relese : L]
11	P2.14	I	TV-LINK	75	P3.1	0	DM_RESET(IDTV)
12	P2.15	0	Request for chassis CPU communication	76	REMOCON	1	Remote control
13	VSS33	-	GND	77	P3.3	ı	Clock for OSD
14	VDD33	I	3.3V	78	P3.4	0	Red for OSD
15	P4.5	0	TV-LINK out	79	P3.5	0	Red for OSD
16	A20	0	Program ROM address for main CPU	80	P3.6	0	Red for OSD
17	A19	0	Program ROM address for main CPU	81	P3.7	0	Red for OSD
18	A18	0	Program ROM address for main CPU	82	MTST	I/O	Data transmission for chassis CPU communication
19	A17	0	Program ROM address for main CPU	83	MTSR	I/O	Data receive for chassis CPU communication
20	VSS25	-	GND	84	VSS33	-	GND
21	VDD25	ı	2.5V	85	VDD33	ı	3.3V
22	A16	0	Program ROM address for main CPU	86	VSS25	-	GND
23	A8		Program ROM address for main CPU	87	VDD25	ı	2.5V
24	A7	0	Program ROM address for main CPU	88	TXD0	I/O	Communication for adjustment
25	A9	0	Program ROM address for main CPU	89	RXD0	I/O	Communication for adjustment
26	A6	0	Program ROM address for main CPU	90	P3.12	0	Red for OSD
27	A5	0	Program ROM address for main CPU	91	CLK	0	Clock for chassis CPU communication
28	A10	0	Program ROM address for main CPU	92	P3.15	0	Green for OSD
29	A11		Program ROM address for main CPU	93	P5.14	0	Green for OSD
30	A12	0	Program ROM address for main CPU	94	P5.15	0	Green for OSD
31	VSS33	-	GND	95	TRIG_IN	0	Green for OSD
32	VDD33	I	3.3V	96	TRIG_OUT	0	Green for OSD
33	A4	0	Program ROM address for main CPU	97	P6.2	0	Green for OSD
34	A3	0	Program ROM address for main CPU	98	P6.3	I/O	I ² C bus clock (for main memory)
35	A2		Program ROM address for main CPU	99	P6.4	I/O	I ² C bus Data (for main memory)
36	A1	0	Program ROM address for main CPU	100	P6.5	0	Teletext signal select [Analog RGB: H / Digital RGB: L
37	A0	0	Program ROM address for main CPU	101	IRQ	0	IRQ(IDTV)
38	A13	0	Program ROM address for main CPU	102	VSYNC	I/O	Vertical sync
39	ARAS/A14	0	Program ROM address for main CPU	103	HSYNC	I/O	Horizontal sync
40	CAS/A15	0	Program ROM address for main CPU	104	COR/RSTOUT	0	Not used
41	VSS33	-	GND	105	BLANK	0	Ys for OSD / Teletext
42	VDD33	ı	3.3V	106	VDD33	ı	3.3V
43	MEMCLK	0	Clock for memory	107	VSS33	-	GND
44	CSSDRAM	0	Chip select for memory	108	XTAL1	- 1	6MHz for system clock
45	CLKEN	0	Clock enable for memory	109	XTAL2	0	6MHz for system clock
46	CSROM	0	Chip select for memory	110	VSSA	-	GND
47	RD	0	Read for memory	111	VDDA	ı	2.5V
48	UDQM	0	Control buffer of memory	112	R	0	R for OSD / Teletext
49	LDQM	0	Control buffer of memory	113	G	0	G for OSD / Teletext
50	WR	0	Write for memory	114	В	0	B for OSD / Teletext
51	D15	I/O	Program ROM data for main CPU	115	VSSA	-	GND
52	VSS33	-	GND	116	VDDA	ı	2.5V
53	VDD33	ı	3.3V	117	CVBS2	I	Video for Teletext
54	D7	I/O	Program ROM data for main CPU	118	VSSA	-	GND
55	D0	I/O	Program ROM data for main CPU	119	VDDA	ı	2.5V
56	D14	I/O	Program ROM data for main CPU	120	CVBS1B	ı	Video for Teletext
	D8	I/O	Program ROM data for main CPU	121	CVBS1A	ı	Video for Teletext
57	D0		Program ROM data for main CPU	122	VSSA	-	GND
57 58	D6		Program ROM data for main CPU	123	VDDA	ı	2.5V
	D6	I/O				-	
58		I/O -	GND	124	KEY1	ı	Key scan data 1 [ON : H]
58 59	D1	_		124 125	KEY1 KEY2	-	
58 59 60	D1 VSS33	- I	GND		KEY2	I I	Key scan data 1 [ON : H] Key scan data 2 [ON : H] Main power ON / OFF control [ON : L]
58 59 60 61	D1 VSS33 VDD33	- I I/O	GND 3.3V	125			Key scan data 2 [ON : H]

SECTION 3 DISASSEMBLY

3.1 DISASSEMBLY PROCEDURE

CAUTION AT DISASSEMBLY:

- Be sure to perform the SYSTEM SETTEING, at the end of the procedure.
- · Make sure that the power cord is disconnected from the outlet.
- · Pay special attention not to break or damage the parts.
- When removing each board, remove the connectors as required. Taking notes of the connecting points (connector numbers) makes service procedure manageable.
- Make sure that there is no bent or stain on the connectors before inserting, and firmly insert the connectors.

3.1.1 REMOVING THE STAND (Fig.1)

- (1) Remove the 2 screws [A].
- (2) Remove the CORD COVER.
- (3) Remove the 4 screws [B].
- (4) Remove the STAND.

3.1.2 REMOVING THE REAR COVER (Fig.1)

- · Remove the STAND.
 - (1) Remove the JACK COVER (L/R).
 - (2) Remove the 7 screws [C], the 5 screws [D], and the 1 screw [E].
 - (3) Remove the REAR COVER.

3.1.3 REMOVING THE POWER PWB (Fig.1)

- · Remove the STAND.
- · Remove the REAR COVER.
 - (1) Remove the 1 screw [F].
 - (2) Remove the POWER CORD HOLDER.
 - (3) Remove the POWER CORD.
 - (4) Remove the 4 screws [G].
 - (5) Remove the POWER PWB.

3.1.4 REMOVING THE D-AMP PWB (Fig.1)

- · Remove the STAND.
- Remove the REAR COVER.
 - (1) Remove the 2 screw [H].
 - (2) Remove the D-AMP PWB.

3.1.5 REMOVING THE ANALOG PWB (Fig.1)

- · Remove the STAND.
- · Remove the REAR COVER.
- · Remove the D-AMP PWB.
 - (1) Remove the 3 screws [J] and 2 screws [K].
 - (2) Remove the TERMINAL BASE.
 - (3) Remove the 1 screw [L].
 - (4) Remove the TUNER BASE.
 - (5) Remove the 2 screws [M].
 - (6) Remove the D-AMP BRACKET.
 - (7) Remove the 2 screws [N] and 2 screws [P].
 - (8) Remove the ANALOG PWB.

3.1.6 REMOVING THE DC-DC PWB (Fig.1)

- Remove the STAND.
- · Remove the REAR COVER.
 - (1) Remove the 4 screws [Q].
 - (2) Remove the BACK BRACKET.
 - (3) Remove the 2 screws [R].
 - (4) Remove the DC-DC PWB.

3.1.7 REMOVING THE DIGITAL TUNER UNIT (Fig.1) [DX7 series only]


- · Remove the STAND.
- · Remove the REAR COVER.
- · Remove the BACK BRACKET.
 - (1) Remove the SHIELD COVER by sliding it in the direction of the arrow.
 - (2) Remove the 5 screws [S] and 2 screws [T].
 - (3) Remove the DIGITAL TUNER UNIT.

3.1.8 REMOVING THE DIGITAL PWB (Fig.1)

- · Remove the STAND.
- · Remove the REAR COVER.
- · Remove the BACK BRACKET.
- Remove the SHIELD COVER.
- Remove the DIGITAL TUNER UNIT.
 (1) Remove the 2 screws [U] and 2 screws [V].
 - (2) Remove the SHIELD TERMINAL.
 - (3) Remove the 7 screws [W].
 - (4) Remove the DIGITAL PWB BRACKET. [DX7 series only]
 - (5) Remove the 2 screws [X].
 - (6) Remove the DIGITAL PWB.

CAUTION:

Make sure to perform the "SYSTEM SETTEING", when DIGITAL PWB is replaced.

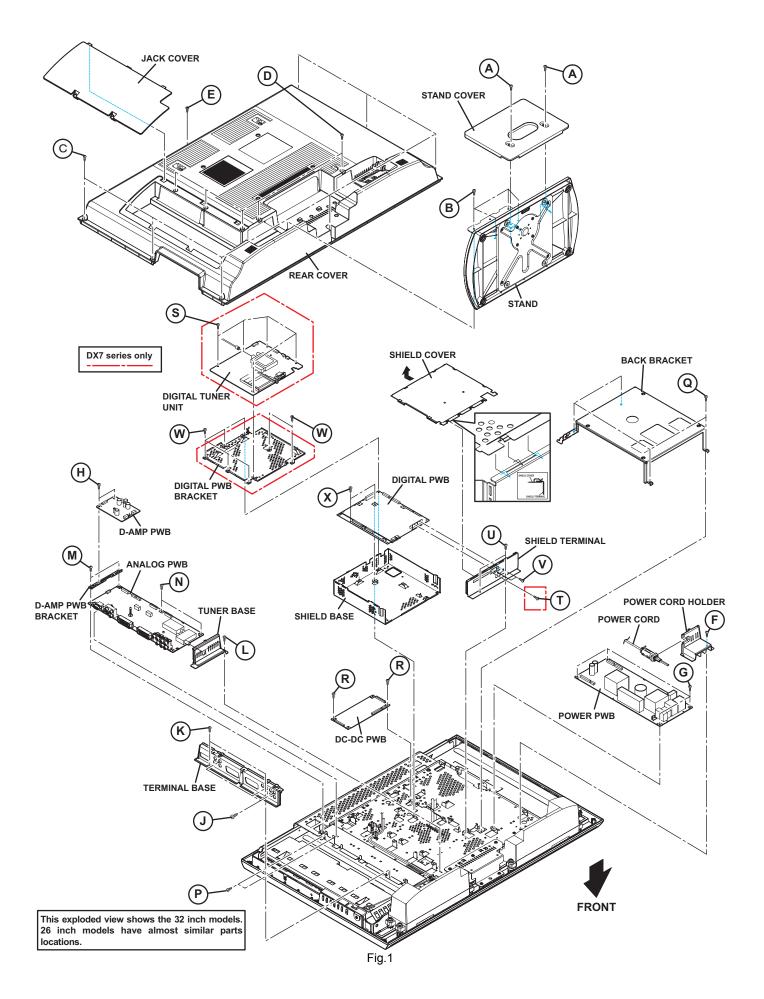

3.1.9 REMOVING THE SW PWB (Fig.2)

- · Remove the STAND.
- · Remove the REAR COVER.
 - (1) Remove the 2 screws [A].
 - (2) Remove the CONTROL ASS'Y with SW PWB.
 - (3) Remove the 2 screws [B].
 - (4) Remove the SW PWB from the CONTROL ASS'Y.

3.1.10 REMOVING THE SPEAKER (Fig.2)

- · Remove the STAND.
- · Remove the REAR COVER.
 - (1) Remove the 6 screws [C].
 - (2) Remove the SPEAKER (L/R).

NOTE:

- Since the speaker is attached in a certain direction, attach the speaker in the same correct direction as it has been attached.
- When the speaker is decomposed, the performance cannot be kept.

3.1.11 REMOVING THE LED PWB (Fig.2)

- · Remove the STAND.
- · Remove the REAR COVER.
 - (1) Remove the 2 screws [D].
 - (2) Remove the STAND BRACKET.
 - (3) Remove the 2 hooks [E].
 - (4) Remove the LED PWB.

3.1.12 REMOVING THE ILLUMINATE LENS (Fig.2)

- Remove the STAND.
- Remove the REAR COVER.
- · Remove the LED PWB.
- · Remove the STAND BRACKET.
 - (1) Remove the 2 screws [F].
 - (2) Remove the ILLUMINATE LENS.

3.1.13 REMOVING THE LCD PANEL UNIT (Fig.2)

- · Remove the STAND.
- · Remove the REAR COVER.
- · Remove the BACK BRACKET.
- · Remove the STAND BRACKET.
- Remove the POWER CORD HOLDER.
 - (1) Remove the 2 screws [G].
 - (2) Remove the MAIN BASE.
 - (3) Remove the 2 screws [H] and 2 screw [J].
 - (4) Remove the LCD PANEL UNIT with TOP/BOTTOM FRAME.
 - (5) Remove the 2 screws [K].
 - (6) Remove the TOP FARAME from the LCD PANEL UNIT.
 - (7) Remove the 2 screws [L].
 - (8) Remove the BOTTOM FARAME from the LCD PANEL UNIT.

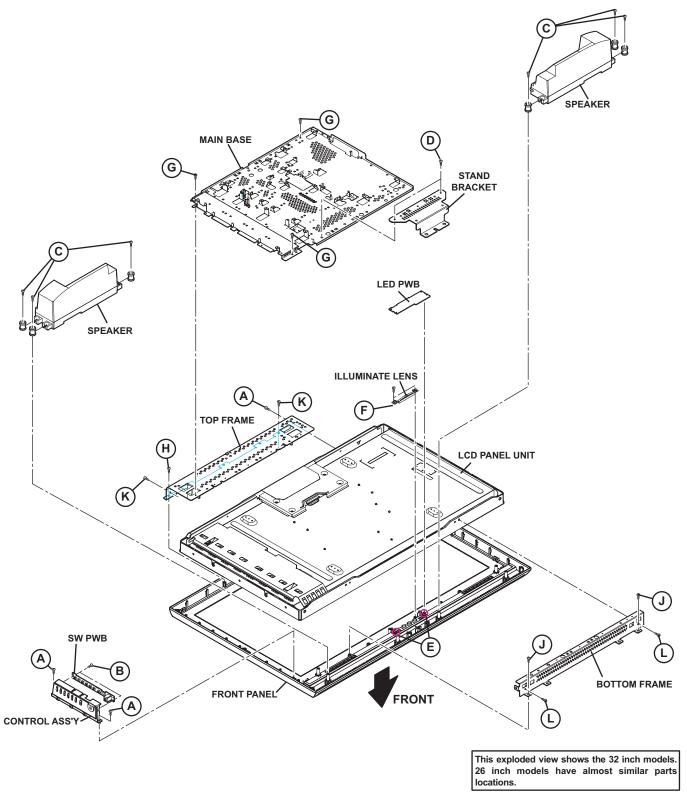


Fig.2

3.2 MEMORY IC REPLACEMENT

- · This model uses the memory IC.
- This memory IC stores data for proper operation of the video and drive circuits.
- When replacing, be sure to use an IC containing this (initial value) data.

3.2.1 MEMORY IC TABLE

•	Simbol	Number of pins	Mounting PWB	Main content of data
	C7201	48-pin	DIGITAL PWB	Progaram(Video process) of <u>IC6001</u> (System CPU) is memorized.
	C7602	8-pin	DIGITAL PWB	Setting value of <u>IC7301</u> (MAIN CPU) is memorized.

3.2.2 MEMORY IC REPLACEMENT PROCEDURE

1. Power off

Switch off the power and disconnect the power plug from the AC outlet.

2. Replace the memory IC

Be sure to use the memory IC written with the initial setting values.

3. Power on

Connect the power plug to the AC outlet and switch on the power.

4. Receiving channel setting

Refer to the OPERATING INSTRUCTIONS and set the receive channels (Channels Preset) as described.

5. User setting

Check the user setting items according to the given in page later. Where these do not agree, refer to the OPERATING INSTRUCTIONS and set the items as described.

6. SERVICE MODE setting

Verify what to set in the SERVICE MODE, and set whatever is necessary (Fig.1). Refer to the SERVICE ADJUSTMENT for setting.

3.2.3 SERVICE MODE SETTING

■SERVICE MODE SCREEN

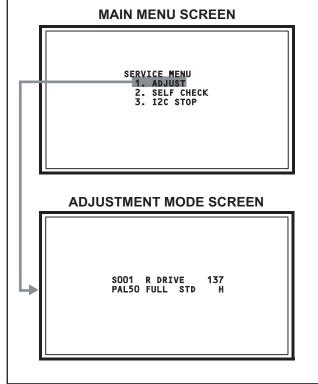


Fig.1

■SETTING ITEM

Setting items	Settings	Item No.
Video system setting	Adjust	S001 - S009
Audio system setting	Adjust	T001 - T003
Main CPU system setting	Fixed	M001 - M224
Drive system setting	Fixed	F001 - F002
(Not used)	Fixed	D001
(Not used)	Fixed	Z001

3.2.4 SETTINGS OF FACTORY SHIPMENT

3.2.4.1 BUTTON OPERATION

Setting item	Setting position
POWER	Off
CHANNEL	PR1
VOLUME	10
TV/AV	TV

3.2.4.3 REMOTE CONTROL MENU OPERATION

(1) PICTURE

Setting item		Setting position	
Picture Mode		Bright	
Colour Temp.		Cool	
Features			
Super Digipure		Auto	
Movie Theatre		Auto	
Colour Management		On	
Picture Management		On	
Smart Picture		On	
MPEG Noise Reduction		On	
Colour System Main		Auto	
	Sub	Auto	
4:3 Auto Aspect		Panoramic	

(2) SOUND

Setting item	Setting position
Stereo / I•ii	Stereo Sound
Bass	Centre
Treble	Centre
Balance	Centre
3d Cinema sound	Off
Maxx bass	Off
Voice Enhancer	On

3.2.4.2 REMOTE CONTROL DIRECT OPERATION

Setting item	Setting position
CHANNEL	PR1
VOLUME	10
ZOOM	Panoramic

(4) FEATURES

Setting item	Setting position
Sleep Timer	Off
Child Lock	ld No.0000, All Ch Off
Appearance	Type D
Blue Back	On
Favourite Setting	Reset
Illumination	Bright
Power Lamp	On

(5) SET UP

Setting item	Setting position
Auto Program	Tv Channel Automatically Set
Edit/manual	Preset Ch Only
Language	English
Decoder (Ext-2)	Off
Component Auto Select	On
Hdmi Setting	Auto
Attenuator	Off
Ext Setting	
S-IN	Blank
ID	Blank
Dubbing	Ext-1 → Ext-2

(6) DTV [DX7 series only]

Setting item	Setting position	
Timers		
Name	****	
Start	00:00	
End	00:00	
Date	01/01/2004	
Mode	Inactive	
Configuration		
Audio Language	English	
Subtitle	English	
Favourite Mode	off	
Receiver Upgrade	V.*.*	
Menu Lock	Disabled	

3.3 REPLACEMENT OF CHIP COMPONENT

3.3.1 CAUTIONS

- (1) Avoid heating for more than 3 seconds.
- (2) Do not rub the electrodes and the resist parts of the pattern.
- (3) When removing a chip part, melt the solder adequately.
- (4) Do not reuse a chip part after removing it.

3.3.2 SOLDERING IRON


- (1) Use a high insulation soldering iron with a thin pointed end of it.
- (2) A 30w soldering iron is recommended for easily removing parts.

3.3.3 REPLACEMENT STEPS


1. How to remove Chip parts

[Resistors, capacitors, etc.]

(1) As shown in the figure, push the part with tweezers and alternately melt the solder at each end.



(2) Shift with the tweezers and remove the chip part.




[Transistors, diodes, variable resistors, etc.]

(1) Apply extra solder to each lead.



(2) As shown in the figure, push the part with tweezers and alternately melt the solder at each lead. Shift and remove the chip part.




NOTE:

After removing the part, remove remaining solder from the pattern.


2. How to install Chip parts

[Resistors, capacitors, etc.]

(1) Apply solder to the pattern as indicated in the figure.




(2) Grasp the chip part with tweezers and place it on the solder. Then heat and melt the solder at both ends of the chip part.




[Transistors, diodes, variable resistors, etc.]

- (1) Apply solder to the pattern as indicated in the figure.
- (2) Grasp the chip part with tweezers and place it on the solder.
- (3) First solder lead A as indicated in the figure.



(4) Then solder leads B and C.



SECTION 4 ADJUSTMENT

4.1 ADJUSTMENT PREPARATION

- (1) There are 2 ways of adjusting this TV: One is with the REMOTE CONTROL UNIT and the other is the conventional method using adjustment parts and components.
- (2) The adjustment using the REMOTE CONTROL UNIT is made on the basis of the initial setting values. The setting values which adjust the screen to the optimum condition can be different from the initial setting values.
- (3) Make sure that connection is correctly made AC to AC power source.
- (4) Turn on the power of the TV and measuring instruments for warming up for at least 30 minutes before starting adjustments.
- (5) If the receive or input signal is not specified, use the most appropriate signal for adjustment.
- (6) Never touch the parts (such as variable resistors, transformers and condensers) not shown in the adjustment items of this service adjustment.

4.2 PRESET SETTING BEFORE ADJUSTMENTS

Unless otherwise specified in the adjustment items, preset the following functions with the REMOTE CONTROL UNIT.

Setting item	Settings position
Picture Mode	Standard
Picture Adjustments	Centre
Colour Temp.	Normal
Super Digipure	Auto
Movie Theatre	Auto
Colour Management	On
Picture Management	On
Zoom	Full

4.3 MEASURING INSTRUMENT AND FIXTURES

- Signal generator (Pattern generator) [PAL]
- · Remote control unit

4.4 ADJUSTMENT ITEMS


■ VIDEO CIRCUIT

· WHITE BALANCE (HIGH LIGHT) adjustment

4.5 BASIC OPERATION OF SERVICE MODE

4.5.1 HOW TO ENTER THE SERVICE MODE

- Press [INFORMATION] key and [MUTING] key on the remote control unit simultaneously to enter the SERVICE MODE SCREEN.
- (2) In the SERVICE MENU, press the [1] key to display ADJUSTMENT MODE SCREEN.



NOTE:


- Before enter the SERVICE MODE, press the [MODE] key to confirm that "TV" position is indicated. If it is in a wrong position, the SERVICE MODE operation cannot be performed.
- When a number key other than the [1] key is pressed in the SERVICE MODE SCREEN, the other relevant screen may be displayed.

This is not used in the adjustment procedure. Press the **[MENU]** key to return to the SERVICE MODE SCREEN.

4.5.2 HOW TO EXIT THE SERVICE MODE

Press the **[MENU]** key to exit the Service mode.

4.5.3 SERVICE MODE SELECT KEY LOCATION




4.5.4 ADJUSTMENT MODE

This mode is used to adjust the VIDEO CIRCUIT and the MTS CIRCUIT.

4.5.4.1 HOW TO ENTER THE ADJUSTMENT MODE

When the SERVICE MENU SCREEN of SERVICE MODE is displayed, press [1] key to enter the ADJUSTMENT MODE.

4.5.5 DESCRIPTION OF STATUS DISPLAY



(1) SIGNAL SYSTEM

The signal displayed on the screen is displayed.

PAL50 : PAL50Hz (Composite / S-video)
PAL60 : PAL60Hz (Composite / S-video)

SECAM : SECAM NTSC3 : NTSC3.58 NTSC4 : NTSC4.43

525I : 525i (Component)

525P : 525p

625I : 625i (Component)

625P : 625p 1125I5 : 1125i 50Hz 1125I6 : 1125i 60Hz RGB5 : RGB 525i RGB6 : RGB 625i PCVGA : PC (VGA) PCXGA : PC (XGA)

D625I : DVB-T 625i [Only DX7 series]

H525I : HDMI 525i H525P : HDMI 525p H625I : HDMI 625i H625P : HDMI 625p H750P : HDMI 750p H125I5 : HDMI 1125i 50Hz H125I6 : HDMI 1125i 60Hz

--- : OTHER

(2) ZOOM MODE

State of the SCREEN SIZE or MULTI PICTURE is displayed.

SINGLE SCREEN

FULL: FULL

PANO : PANORAMIC 1609 : 16:9 ZOOM

1609S : 16:9 ZOOM SUBTITLE

1409 : 14:9 ZOOM REGU : REGULAR

MULTI SCREEN

M2 : 2-pictures multi M12 : 12-pictures multi

(3) PICTURE MODE

SOFT : SOFT STD : STANDARD BRI : BRIGHT

(4) COLOUR TEMP.

H : COOL
M : NORMAL
L : WARM

(5) SETTING ITEM NAME

Setting item name are displayed. For the setting item names to be displayed, refer to "INITIAL SETTING VALUES IN THE SERVICE MODE".

(6) SETTING ITEM NO.

Setting item numbers are displayed. The setting item numbers to be displayed are listed below.

Item No.	Setting item	
S001 - S009	Video system setting	
T001 - T003	Audio system setting	
M001 - M224	Main CPU system setting	
F001 - F002	Drive system setting	
D001	(NOT USED)	
Z001	(NOT USED)	

(7) SETTING VALUE (DATA)

The SETTING VALUE is displayed.

4.5.6 CHANGE AND MEMORY OF SETTING VALUE

SELECTION OF SETTING ITEM

• [FUNCTION ▲/▼] key.

For scrolling up / down the setting items.

 $S001...S009 \leftrightarrow T001...T003 \leftrightarrow M001...M224 \leftrightarrow$ $F001...F002 \leftrightarrow D001 \leftrightarrow Z001 \leftrightarrow return to S001$

CHANGE OF SETTING VALUE (DATA)

[FUNCTION 4 / ▶] key.

For scrolling up / down the setting values.

MEMORY OF SETTING VALUE (DATA)

Changed setting value is memorized by pressing **[MUTING]** key.

4.6 INITIAL SETTING VALUES IN THE SERVICE MODE

- · Perform fine-tuning based on the "initial values" using the remote control when in the Service mode.
- The "initial values" serve only as an indication rough standard and therefore the values with which optimal display can be achieved may be different from the default values. But, don't change the values that are not written in "ADJUSTMENT PROCEDURE". They are fixed values.

4.6.1 VIDEO SYSTEM SETTING

Item No.	Item	Variable range	Setting value
S001	R DRIVE	0 - 255	137
S002	G DRIVE	0 - 255	125
S003	B DRIVE	0 - 255	124
S004	RESREV	0 - 255	4
S005	RESREV	0 - 255	2
S006	RESREV	0 - 255	2
S007	RESREV	0 - 255	2
S008	RESREV	0 - 255	2
S009	RESREV	0 - 255	2

4.6.2 AUDIO SYSTEM SETTING

Item No.	Item	Variable range	Setting value
T001	RESREV	0 - 15	2
T002	RESREV	0 - 63	2
T003	RESREV	0 - 63	2

4.6.3 MAIN CPU SYSTEM SETTING (Fixed values)

Item No.	Item	Variable range	Setting value
M001	1E00	00 - FF	00
M002	1E01	00 - FF	00
M003	1E02	00 - FF	05
M004	1E03	00 - FF	01
M005	1E04	00 - FF	10
M006	1E05	00 - FF	00
M007	1E06	00 - FF	00
M008	1E07	00 - FF	16
M009	1E08	00 - FF	00
M010	1E09	00 - FF	00
M011	1E0A	00 - FF	01
M012	1E0B	00 - FF	00
M013	1E0C	00 - FF	01
M014	1E0D	00 - FF	00
M015	1E0E	00 - FF	00
M016	1E0F	00 - FF	00
M017	1E10	00 - FF	01
M018	1E11	00 - FF	00
M019	1E12	00 - FF	00
M020	1E13	00 - FF	01
M021	1E14	00 - FF	10
M022	1E15	00 - FF	01
M023	1E16	00 - FF	00
M024	1E17	00 - FF	00
M025	1E18	00 - FF	00
M026	1E19	00 - FF	00
M027	1E1A	00 - FF	00
M028	1E1B	00 - FF	00
M029	1E1C	00 - FF	00
M030	1E1D	00 - FF	00
M031	1E1E	00 - FF	00
M032	1E1F	00 - FF	00
M033	1E20	00 - FF	00
M034	1E21	00 - FF	00

Item No.	Item	Variable range	Cotting value
M035	1E22	00 - FF	00
M036	1E23	00 - FF	00
M037	1E24	00 - FF	00
M038	1E25	00 - FF	00
M039	1E26	00 - FF	00
M040	1E27	00 - FF	00
M041	1E28	00 - FF	00
M042	1E29	00 - FF	00
M043	1E2A	00 - FF	00
M044	1E2B	00 - FF	00
M045	1E2C	00 - FF	00
M046	1E2D	00 - FF	00
M047	1E2E	00 - FF	00
M048	1E2F	00 - FF	00
M049	1E30	00 - FF	00
M050	1E31	00 - FF	02
M051	1E32	00 - FF	01
M052	1E33	00 - FF	00
M053	1E34	00 - FF	00
M054	1E35	00 - FF	00
M055	1E36	00 - FF	01
M056	1E37	00 - FF	00
M057	1E38	00 - FF	05
M058	1E39	00 - FF	4E
M059	1E3A	00 - FF	00
M060	1E3B	00 - FF	30
M061	1E3C	00 - FF	00
M062	1E3D	00 - FF	00
M063	1E3E	00 - FF	00
M064	1E3F	00 - FF	00
M065	1E40	00 - FF	00
M066	1E41	00 - FF	00
M067	1E42	00 - FF	03
M068	1E43	00 - FF	30
M069	1E44	00 - FF	00
			20
M070	1E45	00 - FF	
M071	1E46	00 - FF	03
M072	1E47	00 - FF	00
M073	1E48	00 - FF	00
M074	1E49	00 - FF	00
M075	1E4A	00 - FF	03
M076	1E4B	00 - FF	03
M077	1E4C	00 - FF	03
M078	1E4D	00 - FF	01
M079	1E4E	00 - FF	03
M080	1E4F	00 - FF	00
M081	1E50	00 - FF	06
M082	1E51	00 - FF	00
M083	1E52	00 - FF	23
M084	1E53	00 - FF	00
M085	1E54	00 - FF	00
M086	1E55	00 - FF	00
M087	1E56	00 - FF	00

Item No.	Item	Variable range	Sotting value
M088	1E57	00 - FF	
			00
M089	1E58	00 - FF	00
M090	1E59	00 - FF	00
M091	1E5A	00 - FF	00
M092	1E5B	00 - FF	00
M093	1E5C	00 - FF	00
M094	1E5D	00 - FF	00
M095	1E5E	00 - FF	00
M096	1E5F	00 - FF	00
M097	1E60	00 - FF	00
M098	1E61	00 - FF	00
M099	1E62	00 - FF	00
M100	1E63	00 - FF	00
M101	1E64	00 - FF	00
M102	1E65	00 - FF	00
M103	1E66	00 - FF	00
M104	1E67	00 - FF	00
M105	1E68	00 - FF	00
M106	1E69	00 - FF	00
M107	1E6A	00 - FF	02
M108	1E6B	00 - FF	00
M109	1E6C	00 - FF	00
M110	1E6D	00 - FF	00
M111	1E6E	00 - FF	00
M112	1E6F	00 - FF	00
M113			00
	1E70	00 - FF	
M114	1E71	00 - FF	00
M115	1E72	00 - FF	00
M116	1E73	00 - FF	00
M117	1E74	00 - FF	00
M118	1E75	00 - FF	00
M119	1E76	00 - FF	00
M120	1E77	00 - FF	0F
M121	1E78	00 - FF	00
M122	1E79	00 - FF	00
M123	1E7A	00 - FF	00
M124	1E7B	00 - FF	00
M125	1E7C	00 - FF	00
M126	1E7D	00 - FF	00
M127	1E7E	00 - FF	02
M128	1E7F	00 - FF	00
M129	1E80	00 - FF	01
M130	1E81	00 - FF	00
M131	1E82	00 - FF	01
M132	1E83	00 - FF	00
M133	1E84	00 - FF	00
M134	1E85	00 - FF	00
M135	1E86	00 - FF	00
M136	1E87	00 - FF	00
M137	1E88	00 - FF	00
M138	1E89	00 - FF	00
M139	1E8A	00 - FF	00
M140	1E8B		00
		00 - FF	
M141	1E8C	00 - FF	00
M142	1E8D	00 - FF	00
M143	1E8E	00 - FF	00
M144	1E8F	00 - FF	00
M145	1E90	00 - FF	00

Item No.	Item	Variable range	Setting value
M146	1E91	00 - FF	00
M147	1E92	00 - FF	00
M148	1E93	00 - FF	00
M149	1E94	00 - FF	00
M150	1E95	00 - FF	00
M151	1E96	00 - FF	00
M152	1E97	00 - FF	
		00 - FF	00
M153 M154	1E98	00 - FF	00
	1E99		00
M155	1E9A	00 - FF	01
M156	1E9B	00 - FF	00
M157	1E9C	00 - FF	03
M158	1E9D	00 - FF	00
M159	1E9E	00 - FF	00
M160	1E9F	00 - FF	00
M161	1EA0	00 - FF	00
M162	1EA1	00 - FF	00
M163	1EA2	00 - FF	01
M164	1EA3	00 - FF	00
M165	1EA4	00 - FF	00
M166	1EA5	00 - FF	00
M167	1EA6	00 - FF	00
M168	1EA7	00 - FF	00
M169	1EA8	00 - FF	00
M170	1EA9	00 - FF	00
M171	1EAA	00 - FF	00
M172	1EAB	00 - FF	00
M173	1EAC	00 - FF	0A
M174	1EAD	00 - FF	00
M175	1EAE	00 - FF	00
M176	1EAF	00 - FF	00
M177	1EB0	00 - FF	00
M178	1EB1	00 - FF	00
M179	1EB2	00 - FF	00
M180	1EB3	00 - FF	00
M181	1EB4	00 - FF	00
M182	1EB5	00 - FF	00
M183	1EB6	00 - FF	00
M184	1EB7	00 - FF	00
M185	1EB8	00 - FF	00
M186	1EB9	00 - FF	00
M187	1EBA	00 - FF	00
M188	1EBB	00 - FF	00
M189	1EBC	00 - FF	00
M190	1EBD	00 - FF	00
M191	1EBE	00 - FF	00
M192	1EBF	00 - FF	00
M193	1EC0	00 - FF	00
M194	1EC1	00 - FF	00
M195	1EC2	00 - FF	01
M196	1EC3	00 - FF	00
M197	1EC4	00 - FF	00
M198	1EC5	00 - FF	00
M199	1EC6	00 - FF	00
M200	1EC7	00 - FF	00
M201	1EC8	00 - FF	01
M202	1EC9	00 - FF	00
M203	1ECA	00 - FF	00
E			

Item No.	Item	Variable range	Setting value
M204	1ECB	00 - FF	00
M205	1ECC	00 - FF	02
M206	1ECD	00 - FF	00
M207	1ECE	00 - FF	00
M208	1ECF	00 - FF	00
M209	1ED0	00 - FF	10
M210	1ED1	00 - FF	00
M211	1ED2	00 - FF	00
M212	1ED3	00 - FF	00
M213	1ED4	00 - FF	00
M214	1ED5	00 - FF	FF
M215	1ED6	00 - FF	00
M216	1ED7	00 - FF	00
M217	1ED8	00 - FF	00
M218	1ED9	00 - FF	00
M219	1EDA	00 - FF	00
M220	1EDB	00 - FF	00

Item No.	Item	Variable range	Setting value
M221	1EDC	00 - FF	00
M222	1EDD	00 - FF	00
M223	1EDE	00 - FF	00
M224	1EDF	00 - FF	00

4.6.4 DRIVE SYSTEM SETTING (Fixed values)

Item No.	Item	Variable range	Setting value
F001	DD	0 - 1	0
F002	RAM REF	0 - 1	0

4.6.5 NOT USED (Fixed values)

Item No.	Item	Variable range	Setting value
D001	RESREV	0 - 255	2

4.6.6 NOT USED (Fixed values)

,	Item No.	Item	Variable range	Setting value
	Z001	RESREV	0 - 255	2

4.7 ADJUSTMENT PROCEDURE

4.7.1 VIDEO CIRCUIT

Item	Measuring instrument	Test point	Adjustment part	Description
WHITE BALANCE (HIGHLIGHT)	Remote control unit Signal generator		[1.ADJUST] S001: R DRIVE (Red drive) S002: G DRIVE (Green drive) S003: B DRIVE (Blue drive)	 (1) Receive a PAL 75% all white signal. (2) Set PICTURE MODE to "STANDARD". (3) Set ZOOM to "FULL". (4) Set COLOUR TEMP. to "NORMAL". (5) Select "1.ADJUST" from the SERVICE MODE. (6) Adjust to Keep one of < S001 > (Red drive), < S002 > (Green drive) or < S003 > (Blue drive) unchanged, then lower the other two so that the all-white screen is equally white throughout.
				NOTE: Set one or more of < \$001 >, < \$002 >, and < \$003 > to "137". (7) Check that white balance is properly tracked from low light to high light. If the white balance tracking is deviated, adjust to correct it. (8) Press the [MUTING] key to memoirze the set value.

SECTION 5 TROUBLESHOOTING

5.1 SELF CHECK FEATURE

5.1.1 OUTLINE

This unit comes with the "Self check" feature, which checks the operational state of the circuit and displays/saves it during failure. Diagnosis is performed when power is turned on, and information input to the main microcomputer is monitored at all time. Diagnosis is displayed in 2 ways via screen display and LED flashes. Failure detection is based on input state of I²C bus and the various control lines connected to the main microcomputer.

5.1.2 HOW TO ENTER THE SELF CHECK MODE

Before enter the SELF CHECK MODE, press the **[MODE]** key to confirm that "TV" position is indicated. If it is in a wrong position, the SELF CHECK MODE operation cannot be performed.

- (1) Press the **[INFORMATION]** key and **[MUTING]** key simultaneously, then enter the SERVICE MODE.
- (2) Press the [2] key SELF CHECK MODE.
- (3) Press the [RED] key to enter Page 2 of the SELF CHECK MODE.

*Use the [GREEN] key to toggle between Page 1 and Page 2.

NOTE:

When a number key other than the [2] key is pressed in the SERVICE MODE screen, the other relevant screen may be displayed.

This is not used in the SELF CHECK MODE. Press the **[MENU]** key to return to the MAIN MENU SCREEN.

5.1.3 HOW TO EXIT THE SELF CHECK MODE

To Save Failure History:

Turn off the power by unplugging the AC power cord plug when in the Self check display mode.

To Clear (Reset) Failure History:

Turn off the power by pressing the **[POWER]** key on the remote control unit when in the Self check display mode.

5.1.4 FAILURE HISTORY

Failure history can be counted up to 9 times for each item. When the number exceeds 9, display will remain as 9. Failure history will be stored in the memory unless it has been deleted.

NOTE:


Only SYNC (with/without sync signals) will be neither counted nor stored.

5.1.5 POINTS TO NOTE WHEN USING THE SELF CHECK FEATURE

In addition to circuit failures (abnormal operation), the following cases may also be iagnosed as "Abnormal" and displayed and counted as "NG".

- (1) Temporary defective transmissions across circuits due to pulse interruptions
- (2) Misalignment in the on/off timing of power for I²C bus (VCC) when turning on/off the main power.

Diagnosis may be impeded if a large number of items are displayed as "NG". As such, start Self check check only after 3 seconds in the case of receivers and 5 seconds in the case of panels upon turning on the power. If recurrences are expected, ensure to clear (reset) the failure history and record the new diagnosis reults.

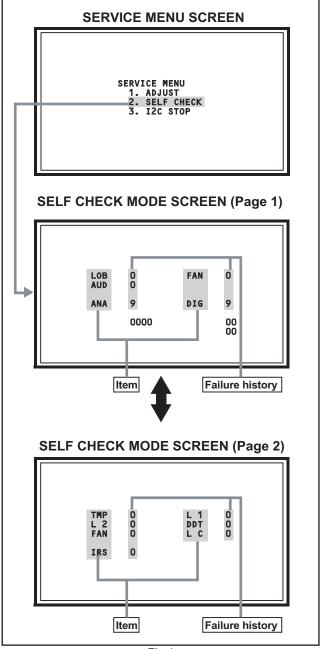

5.1.6 DETAILS

Self check is performed for the following items:

< Page 1 of screen >

Detection item	Display	Detection content	Diagnosis signal (line)	Detection timing
Low bias line short protection	LOB	Confirm the operation of the low bais (16V / 5V / LCD5V / 3.3V / 1.2V) protection circuit. Q9601, Q9651[DC-DC PWB]	LB_PRO	Detection starts 3 seconds after the power is turned on. If error continues between 200 ms the power is turned off.
Fan lock	FAN	Not used		
Abnormal rise of temperature in audio circuit	AUD	Confirmation of the temperature of audio circuit. TH6401 [D-AMP PWB]		Detection starts 3 seconds after the power is turned on. If the temperture of 90°C is detected for 3 seconds the power is turned off.
Devices on the ANALOG PWB	ANA	Confirmation of reply of ACK signal which uses I2C communication. IC101, IC102, IC381, IC601, IC606, TU3002 [ANALOG PWB]		If it checks whenever I2C communication is performed and no reply of ACK signal an error will be counted.
Devices on the DIGITAL PWB	DIG	Confirmation of reply of ACK signal which uses I2C communication. IC6401 [DIGITAL PWB]	SDA	If it checks whenever I2C communication is performed and no reply of ACK signal an error will be counted.

< Page 2 of screen >

Detection item	Display	Detection content	Diagnosis signal (line)	Detection timing
Temp. sensor	TEM	Not used		
Lamp does not light up	L1	Not used		
Lamp goes out	L2	Not used		
Abnormal DD CPU circuit	DDT	Not used		
Fan lock	FAN	Not used		
Lamp cover open	LC	Not used		
Abnormal of optical iris	IRS	Not used		

5.1.7 METHOD OF DISPLAY WHEN A RASTER IS NOT OUTPUT

In the state where a raster is not output by breakdown of the set, an error is displayed by blink of the POWER LED.

Type of error	POWER LED flash cycle
Low bias line short protection [X70 series]	Blue turnig on and off at 1 second intervals.
Low bias line short protection [DX7 series]	Red turnig on and off at 1 second intervals.
Abnormal rise of temperature in audio circuit [X70 series]	Blue turnig on and off at 0.5 second intervals.
Abnormal rise of temperature in audio circuit [DX7 series]	Green turnig on and off at 0.5 second intervals.

< Explanation of operation >

If error is detected, the power is turned off.

Shortly after a power is turned off, POWER LED will be blinked.

Power cannot be turned on until the power cord takes out and inserts, after a power is turned off.





Victor Company of Japan, Limited Flat Panel Display Category 12, 3-chome, Moriya-cho, Kanagawa-ku, Yokohama-city, Kanagawa-prefecture, 221-8528, Japan




SCHEMATIC DIAGRAMS

LCD INTEGRATED DIGITAL TELEVISION

LT-26DX7BJ, LT-26DX7BJ/P, LT-26DX7SJ, LT-26DX7SJ/P, LT-26X70BU, LT-26X70BU/P, LT-26X70SU, LT-26X70SU/P, LT-32DX7BJ, LT-32DX7BJ/P, LT-32DX7SJ, LT-32DX7SJ/P, LT-32X70BU, LT-32X70BU/P

CD-ROM No.SML200603

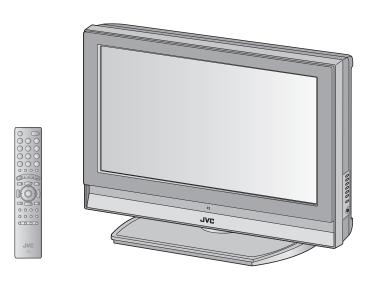



LT-26DX7BJ, LT-26DX7BJ/p, LT-26DX7SJ, LT-26DX7SJ/p, LT-26X70BU, LT-26X70BU/P, LT-26X70SU, LT-26X70SU/P, LT-32DX7BJ, LT-32DX7BJ/P, LT-32DX7SJ, LT-32DX7SJ/P, LT-32X70BU, LT-32X70BU/P, LT-32X70SU, LT-32X70SU/P

STANDARD CIRCUIT DIAGRAM

■ NOTE ON USING CIRCUIT DIAGRAMS

1.SAFETY

The components identified by the ∧ symbol and shading are critical for safety. For continued safety replace safety ciritical components only with manufactures recommended parts.

2.SPECIFIED VOLTAGE AND WAVEFORM VALUES

The voltage and waveform values have been measured under the following conditions.

(1)Input signal : Colour bar signal

(2) Setting positions of each knob/button and

: Original setting position variable resistor when shipped

(3)Internal resistance of tester : DC 20kΩ/V

(4)Oscilloscope sweeping time : H \Rightarrow 20us / div

: V \Rightarrow 5ms / div

> : Othters \Rightarrow Sweeping time is specified

(5)Voltage values : All DC voltage values

* Since the voltage values of signal circuit vary to some extent according to adjustments, use them as reference values.

3.INDICATION OF PARTS SYMBOL [EXAMPLE]

In the PW board : R1209 → R209

4.INDICATIONS ON THE CIRCUIT DIAGRAM (1)Resistors

Resistance value

No unit : [Ω] : [kΩ] K : [MΩ]

Rated allowable power

No indication : 1/16 [W] Others : As specified

Type

No indication : Carbon resistor

OMR : Oxide metal film resistor **MFR** : Metal film resistor MPR : Metal plate resistor **UNFR** : Uninflammable resistor

FR : Fusible resistor

* Composition resistor 1/2 [W] is specified as 1/2S or Comp.

(2)Capacitors

Capacitance value

1 or higher : [pF] less than 1 : [µF]

Withstand voltage

No indication : DC50[V]

Others : DC withstand voltage [V] AC indicated : AC withstand voltage [V]

* Electrolytic Capacitors

47/50[Example]: Capacitance value [µF]/withstand voltage[V]

Type

No indication : Ceramic capacitor MM : Metalized mylar capacitor PP : Polypropylene capacitor MPP

: Metalized polypropylene capacitor

MF : Metalized film capacitor TF : Thin film capacitor : Bipolar electrolytic capacitor BP TAN : Tantalum capacitor

(3)Coils

: [µH] No unit Others : As specified

(4)Power Supply



*Respective voltage values are indicated

(5)Test point



(6)Connecting method



(7)Ground symbol

: ISOLATED(NEUTRAL) side ground

: EARTH ground : DIGITAL ground

5.NOTE FOR REPAIRING SERVICE

This model's power circuit is partly different in the GND. The difference of the GND is shown by the LIVE : (\perp) side GND and the ISOLATED(NEUTRAL): (___) side GND. Therefore, care must be taken for the following points.

(1)Do not touch the LIVE side GND or the LIVE side GND and the ISOLATED(NEUTRAL) side GND simultaneously. if the above caution is not respected, an electric shock may be caused. Therefore, make sure that the power cord is surely removed from the receptacle when, for example, the chassis is pulled out.

(2)Do not short between the LIVE side GND and ISOLATED(NEUTRAL) side GND or never measure with a measuring apparatus measure with a measuring apparatus (oscilloscope, etc.) the LIVE side GND and ISOLATED(NEUTRAL) side GND at the same time. If the above precaution is not respected, a fuse or any parts will be broken.

♦ Since the circuit diagram is a standard one, the circuit and circuit constants may be subject to change for improvement without any notice.

NOTE

◆ Due improvement in performance, some part numbers show in the circuit diagram may not agree with those indicated in the part list.

When ordering parts, please use the numbers that appear in the Parts List.

(No.YA377)2-1


CONTENTS

SEMICON	DUCTOR	RSHAP	FS					2-2
WIRING DI								
_	_							_
BLOCK DI	AGRAM							2-5
CIRCUIT D	IAGRAI	MS						2-7
ANALOG PV	NB CIDCI IIT	DIVCDVM						2-7
	_	_						
DIGITAL PW								
POWER PW		_						_
LED PWB C	IRCUIT DIA	GRAM						2-53
SW PWB CI								
D-AMP PWE								
DC-DC PWB	CIRCUIT D	IAGRAM						2-59
PATTERN	DIAGRA	MS						2-61
ANALOG PV	NR PATTER	N						2-61
								_
DIGITAL PW								
POWER PW	B PATTERN	l						2-67
DC-DC PWB	PATTERN .							2-69
LED PWB PA								
SW PWB PA								
D-AMP PWE	B PATTERN.							2-72
VOLTAGE	CHATE	0						2 72
WAVEFOR	RMS							_
PWB ASS'Y name	LT-26DX7BJ	LT-26DX7SJ	LT-26DX7BJ/P	LT-26DX7SJ/P	LT-26X70BU	LT-26X70SU	LT-26X70BU/P	LT-26X70SU/P
ANALOG P.W. BOARD D-AMP P.W. BOARD	SFL-1241A-U2 SFL-6221A-U2	←	←	←	SFL-1242A-U2	÷	÷	<u></u>
SW P.W. BOARD	SFL-6221A-U2 SFL-7206A-U2	←	÷	←	←	÷	←	÷
LED P.W. BOARD	SFL-8703A-U2	-	←	-	SFL-8710A-U2	-	←	-
POWER P.W. BOARD	SFL-9043A-U2	-	-	-	-	←	-	←
DC-DC P.W. BOARD	SFL-9143A-U2 SFL 0D254A-U2	← ←	← I CA10599-59C (SEL-0D254A)	← ·	SFL-9144A-U2 SEL0D258A-U2	<u></u>	← LCA10599-63C (SEL-0D258A)	<u> </u>
DIGITAL F.W. BOARD	3FL0D234A-02		LON 10033-03C (OF L-0DZ04A)		3FL0D236A-02		LON 10000-000 (OFE-0D/200A)	-
PWB ASS'Y name	LT-32DX7BJ	LT-32DX7SJ	LT-32DX7BJ/P	LT-32DX7SJ/P	LT-32X70BU	LT-32X70SU	LT-32X70BU/P	LT-32X70SU/P
ANALOG P.W. BOARD	SFL-1241A-U2	←	←	←	SFL-1242A-U2	←	←	←
D-AMP P.W. BOARD	SFL-6221A-U2	←	← ←	←	-	←	←	←
SW P.W. BOARD LED P.W. BOARD	SFL-7206A-U2 SFL-8703A-U2	<u>←</u>	←	←	← SFL-8710A-U2	÷	←	÷

POWER P.W. BOARD **SEMICONDUCTOR SHAPES**


SFL-9043A-U2

TRANSISTOR




IC BOTTOM VIEW FRONT VIEW TOP VIEW 0 0 OUT Ε מַמַסממממממ IN


CHIP IC TOP VIEW **←** 1 \circ ------N

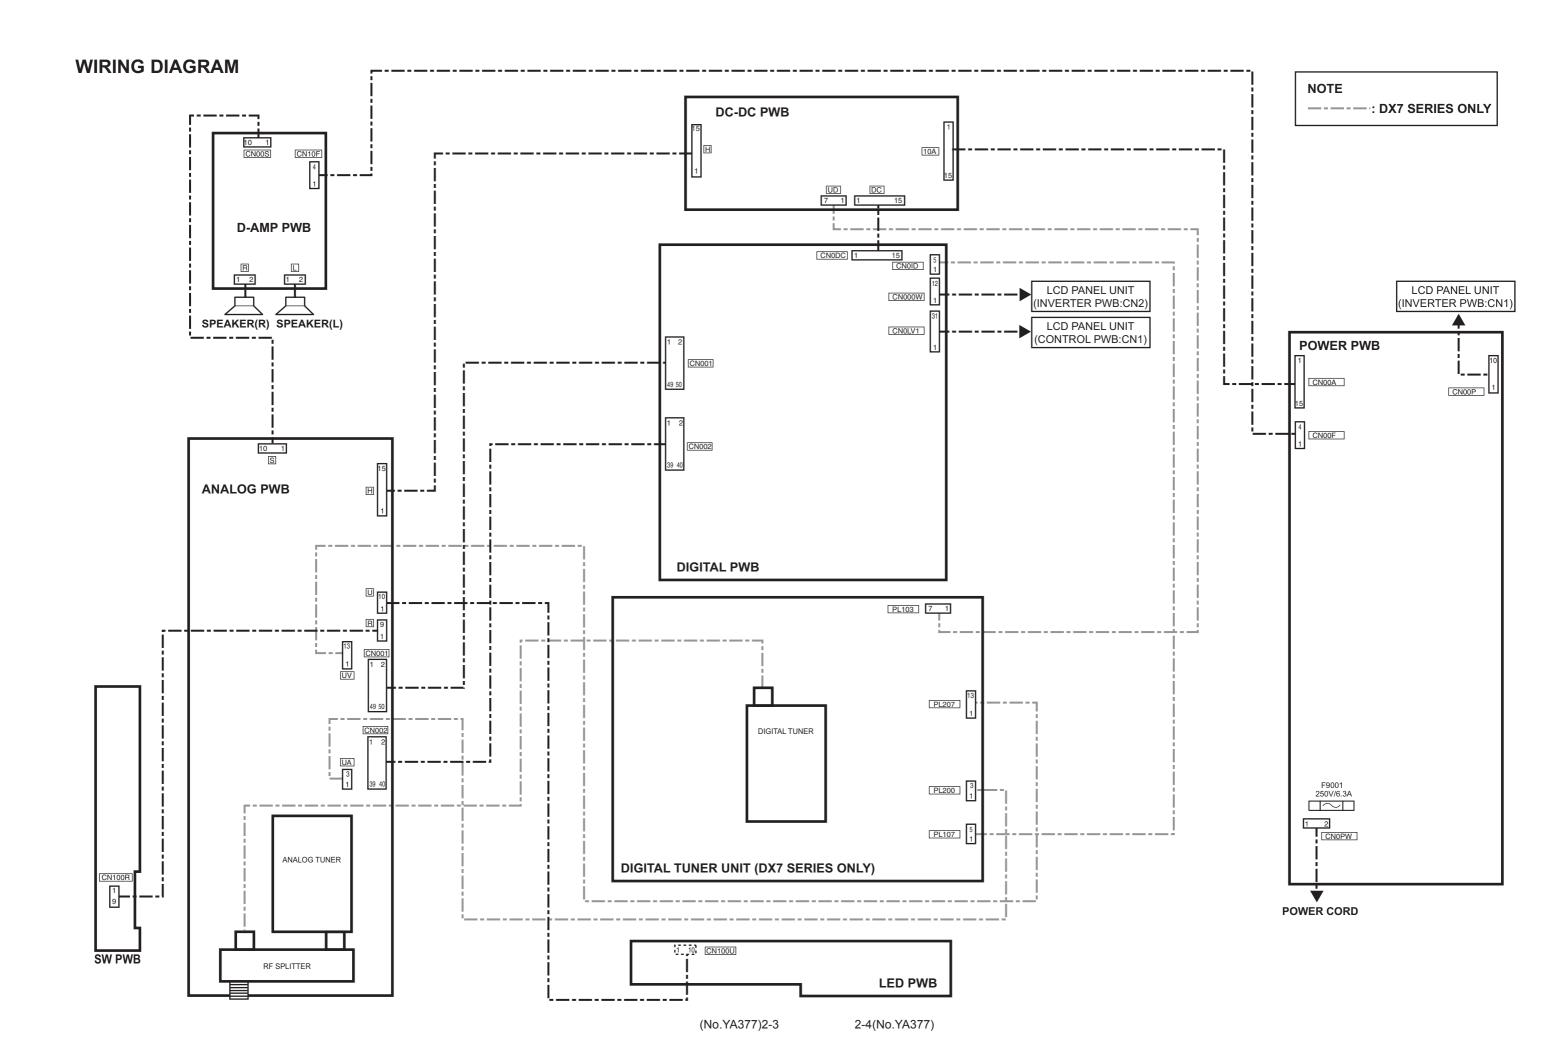


BLOCK DIAGRAM

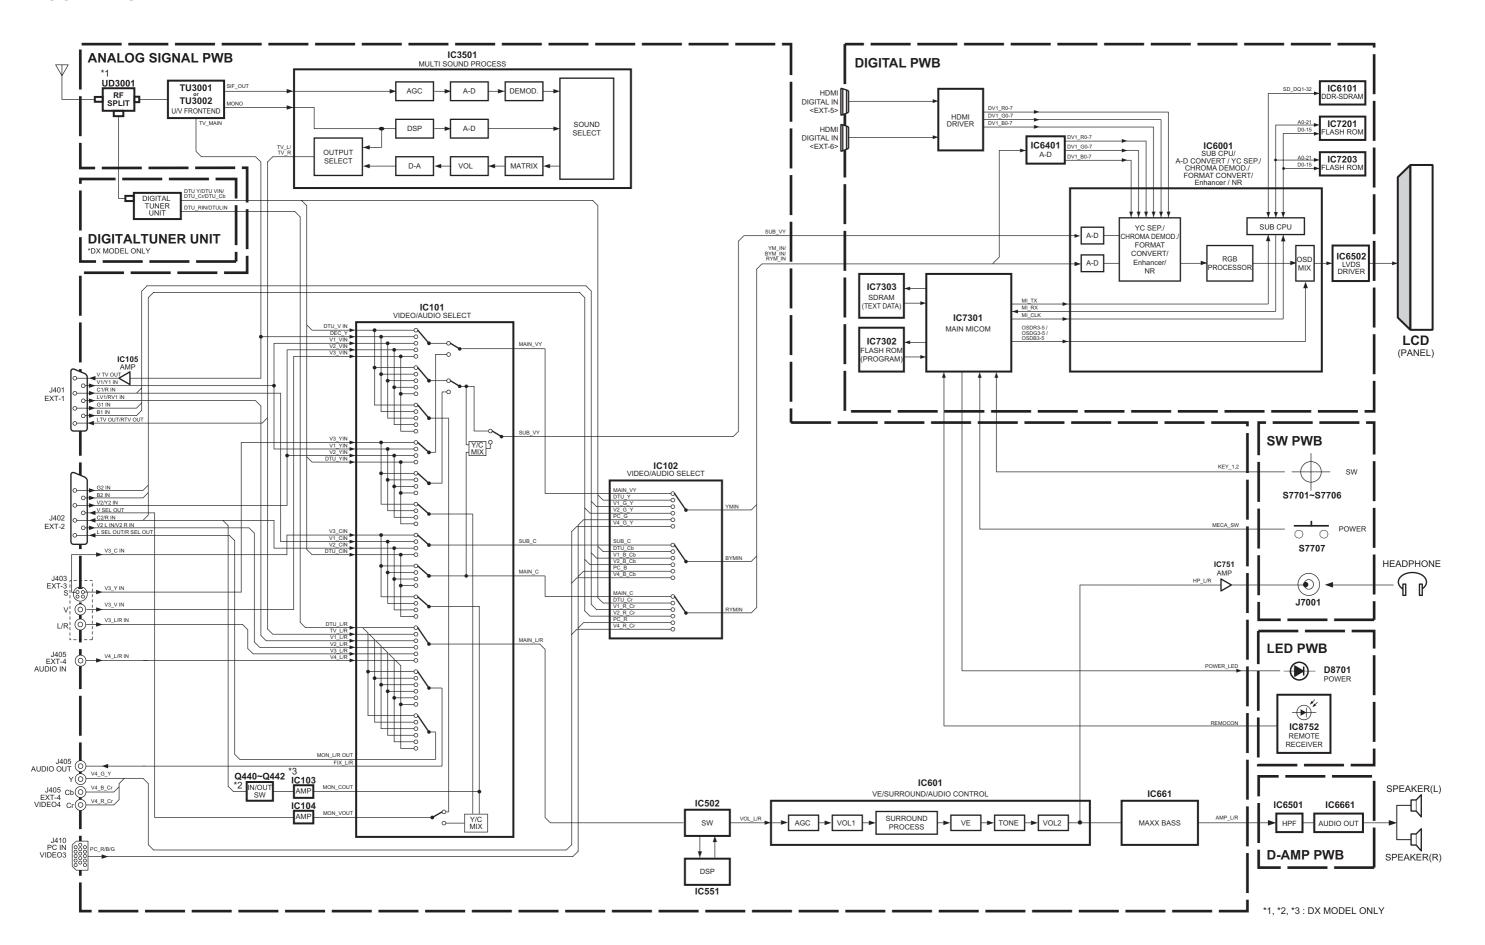



CIRCUIT DIAGRAMS

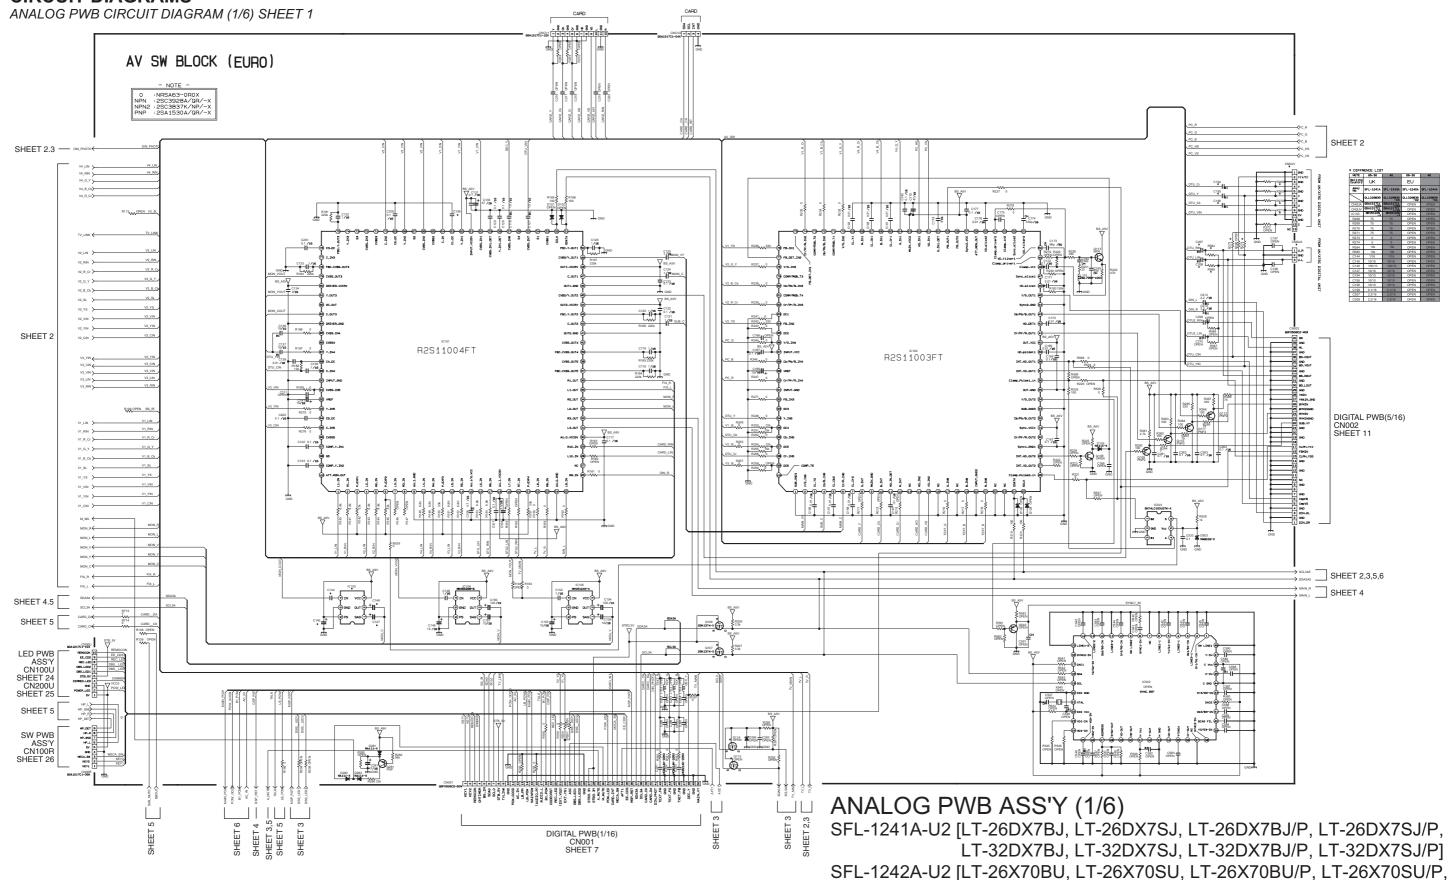

LT-32X70BU, LT-32X70SU, LT-32X70BU/P, LT-32X70SU/P]

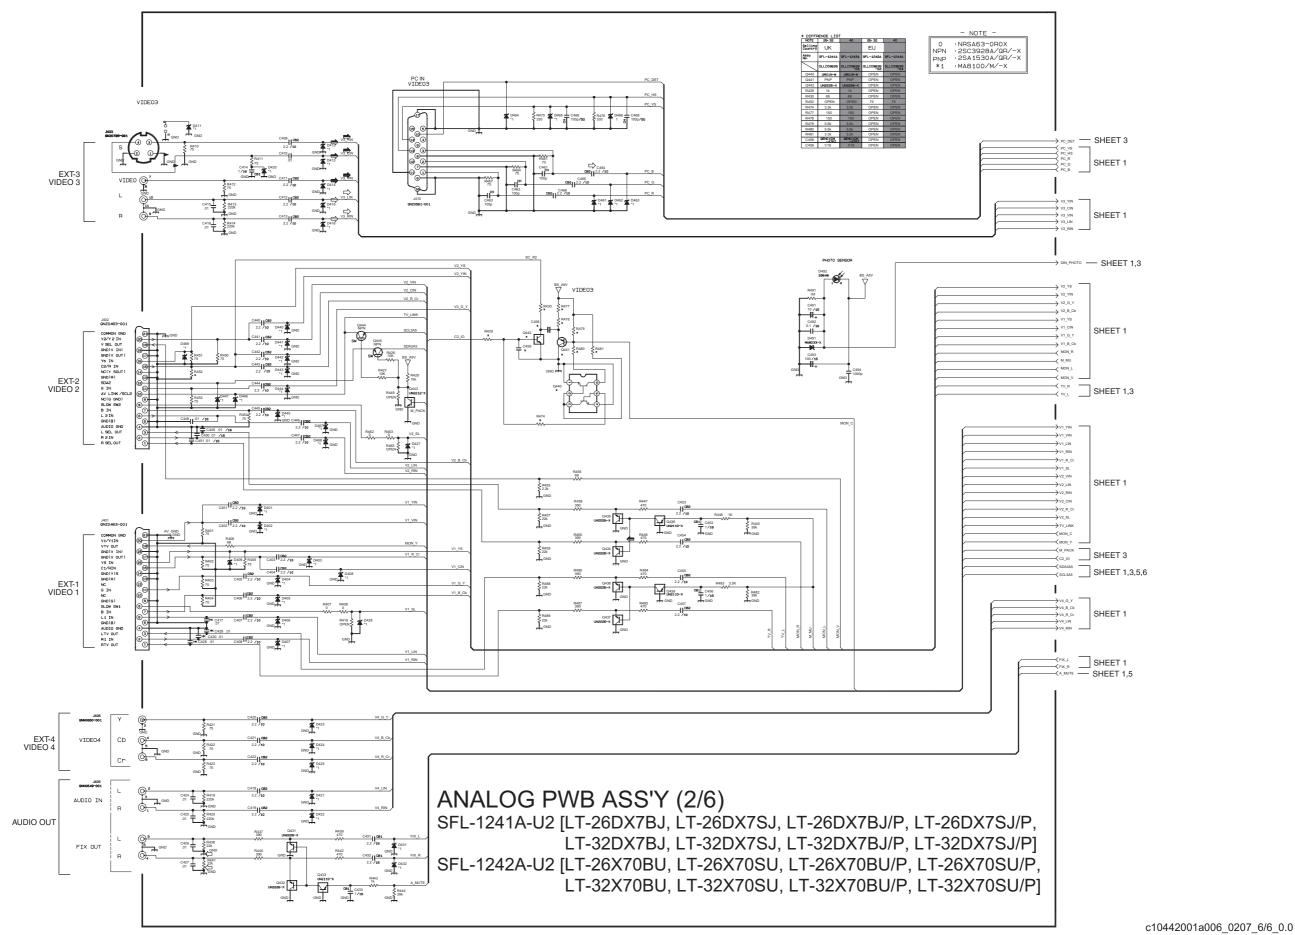


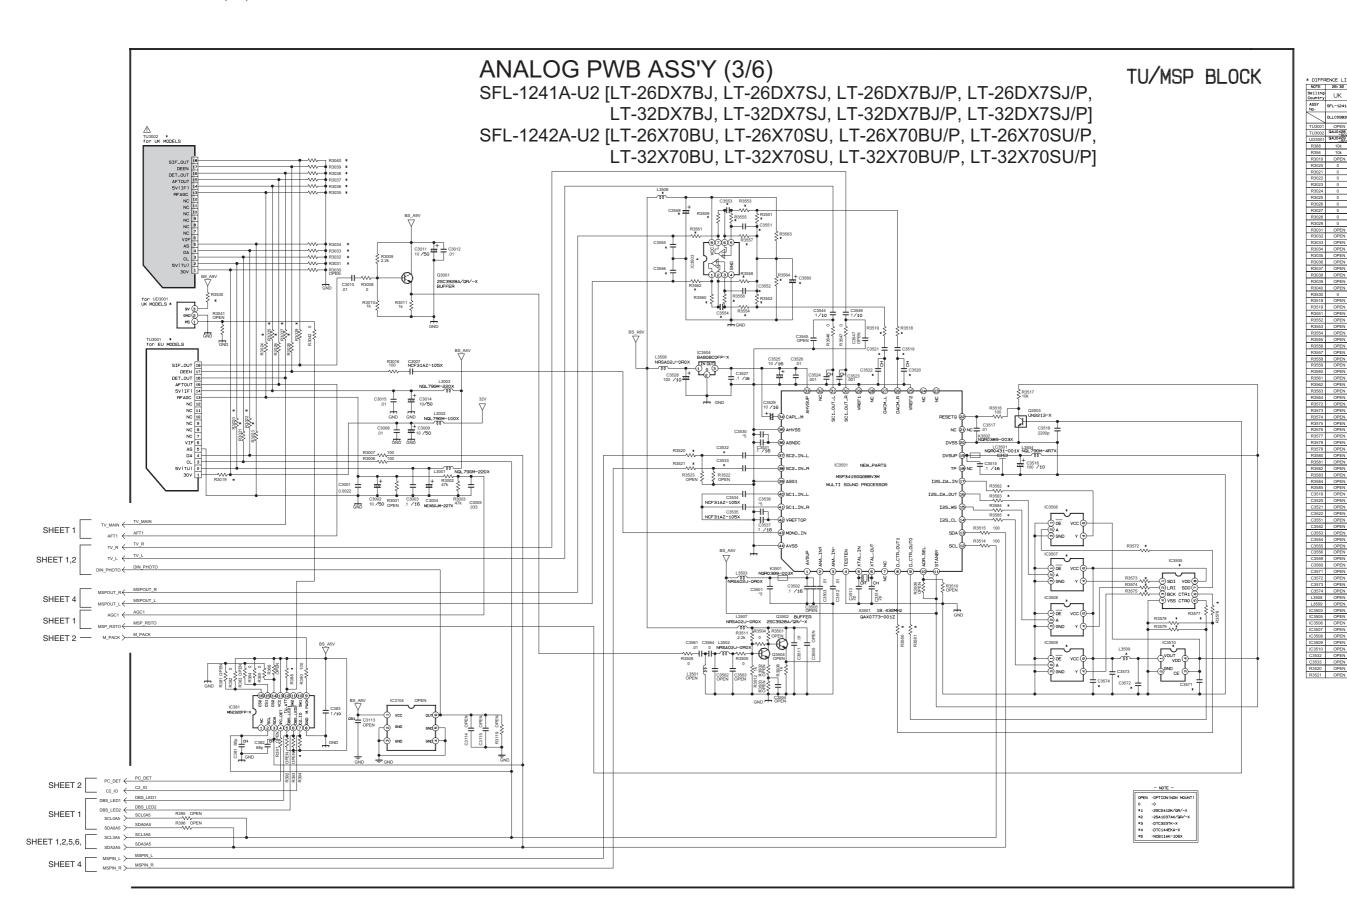


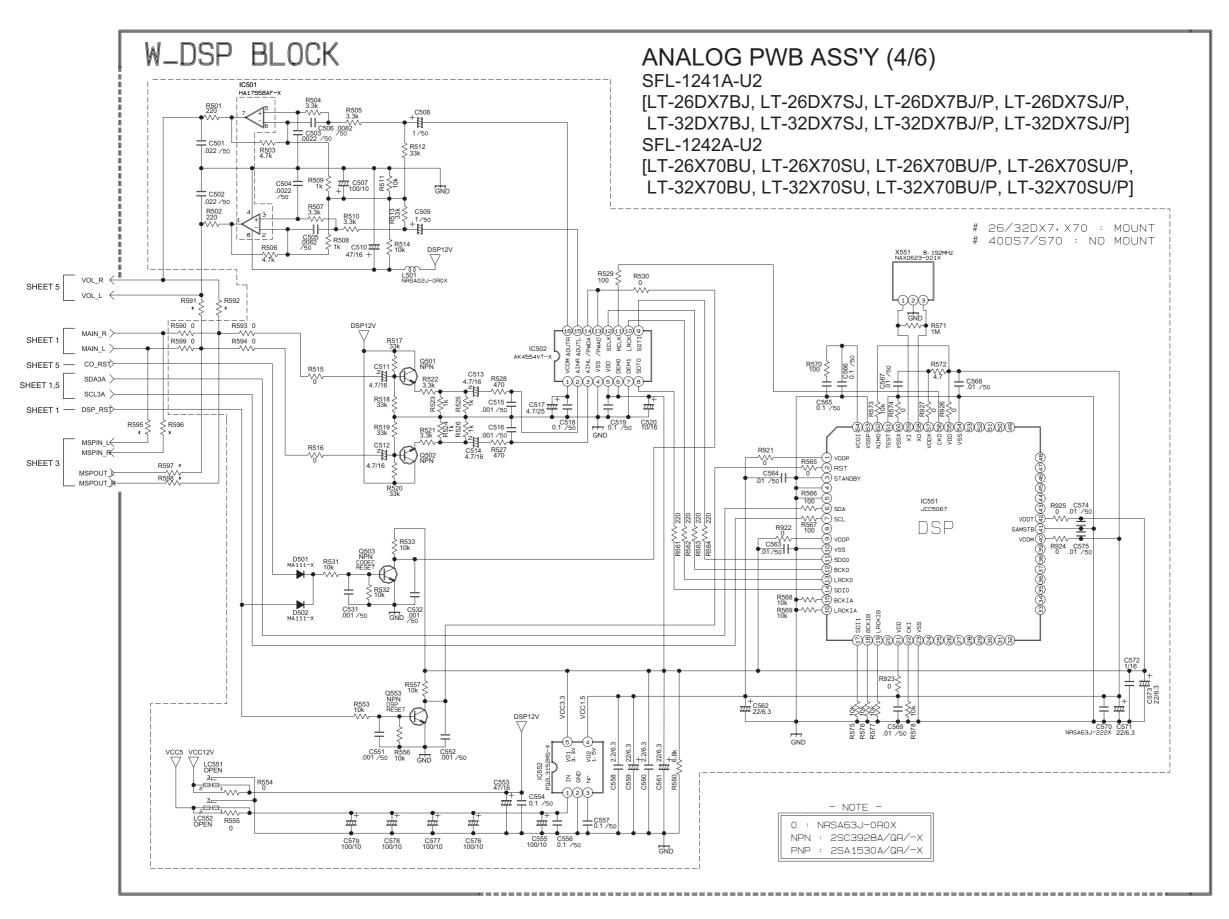



* DIFFRENCE LI	
	C

DITT				
NOTE	26, 32	40	26, 32	40
Selling Country	UK		EU	
Assy No.	SFL-1241A	SFL-1243A	SFL-1242A	SFL-1244A
	OLLC09839	OLLC09839 -03	0LLC09839 -02	OLLC09B39 -04
R591	OPEN	0	OPEN	0
R592	OPEN	0	OPEN	0
R595	OPEN	0	OPEN	0
R596	OPEN	0	OPEN	0
R597	OPEN	0	OPEN	0
R598	ODEN	0	ODEN	0

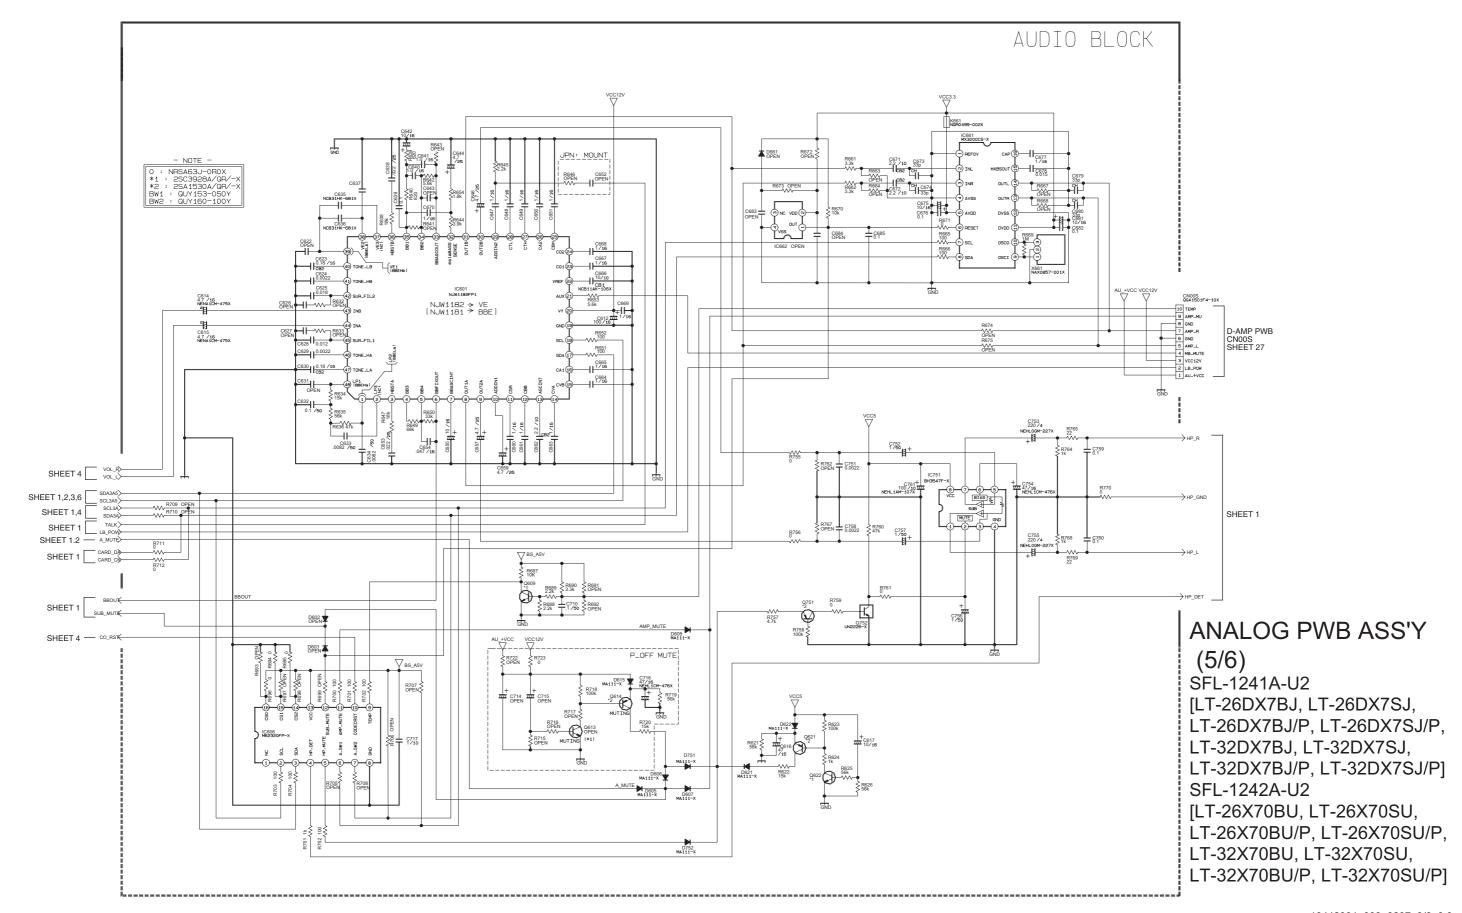

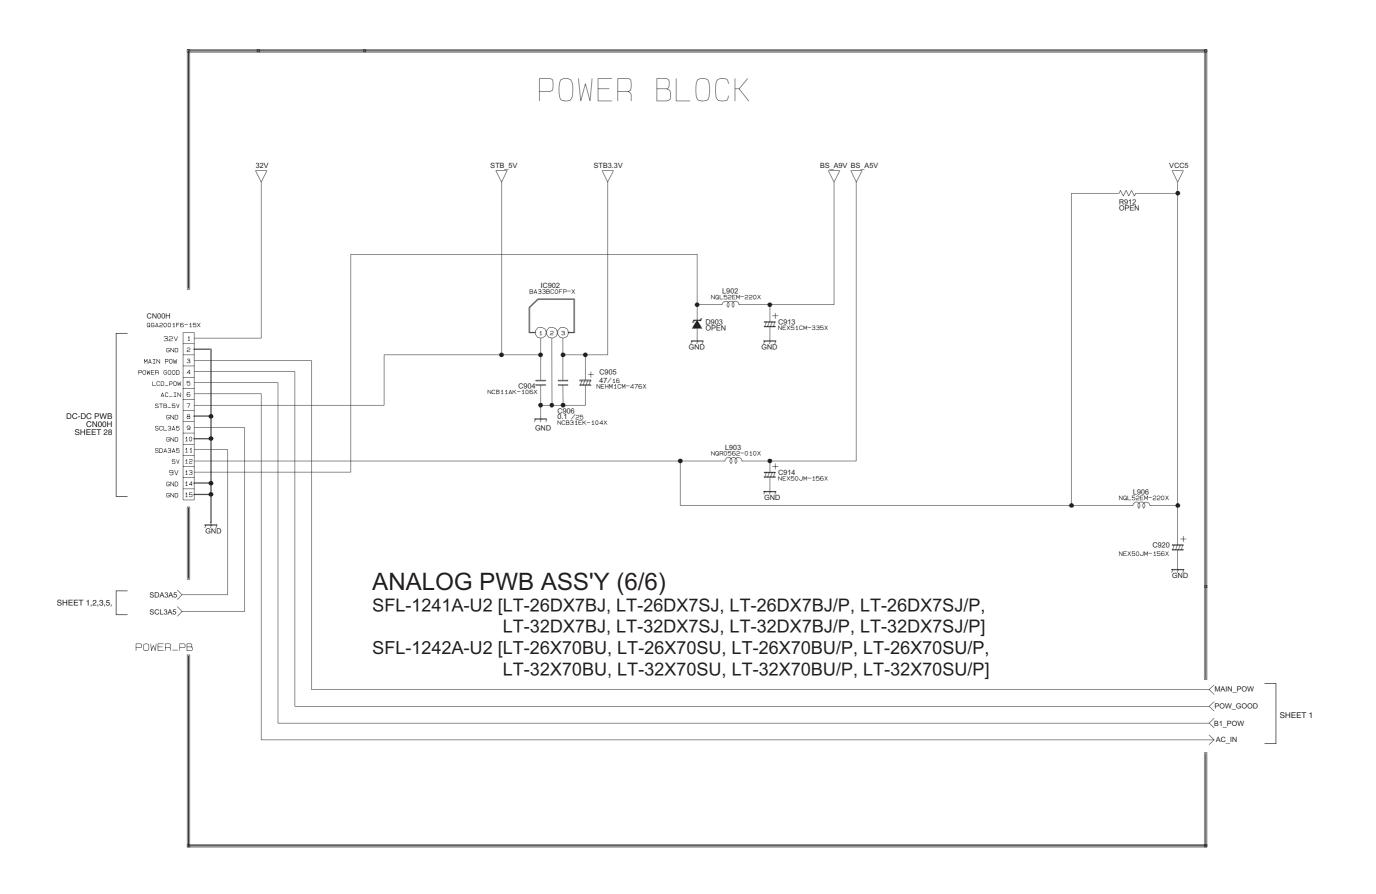


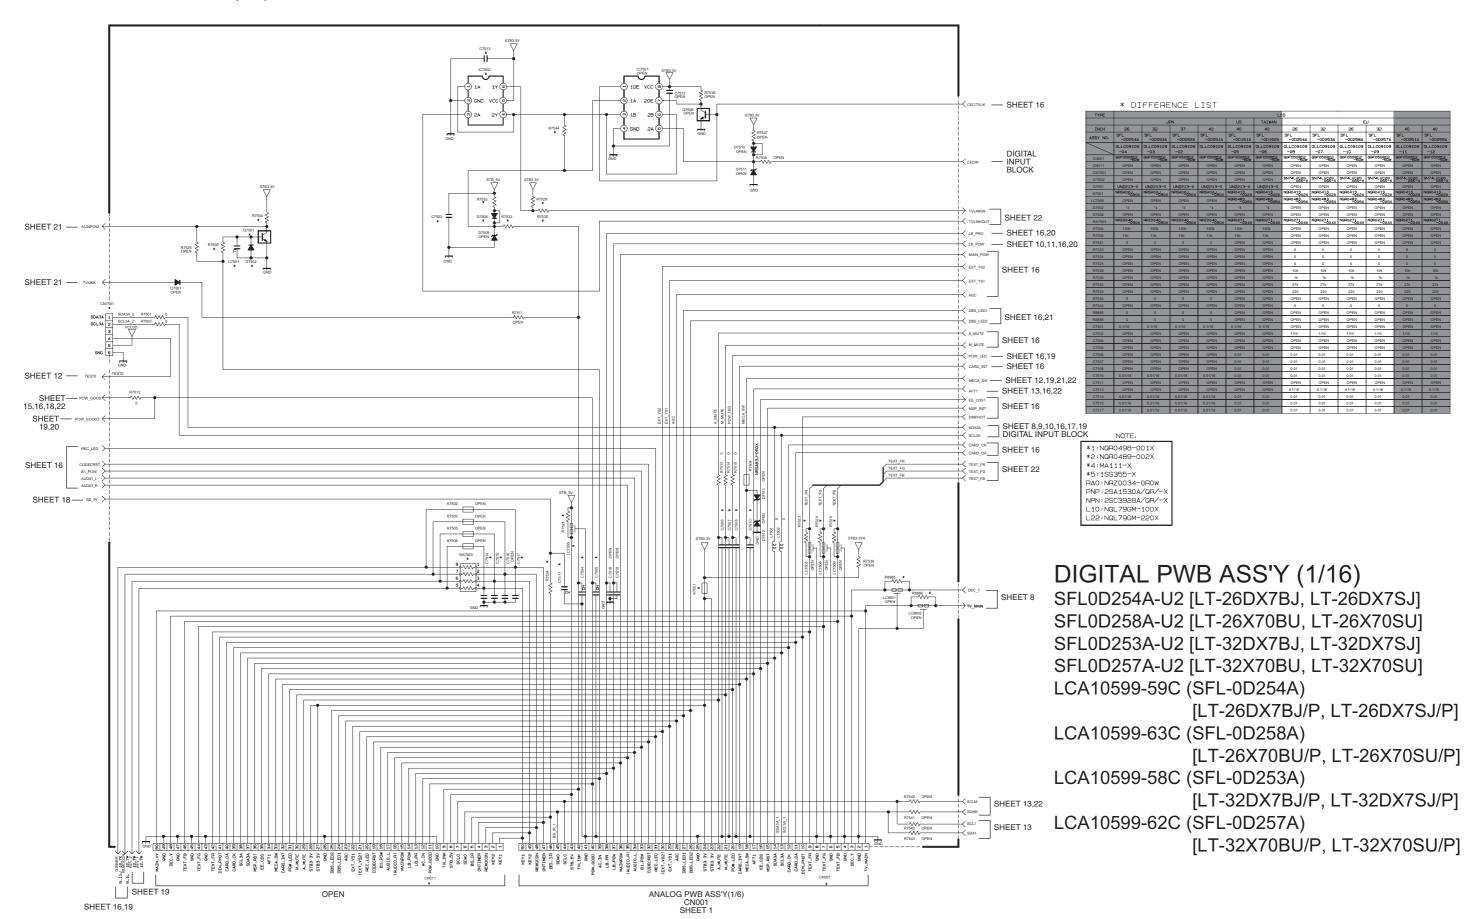

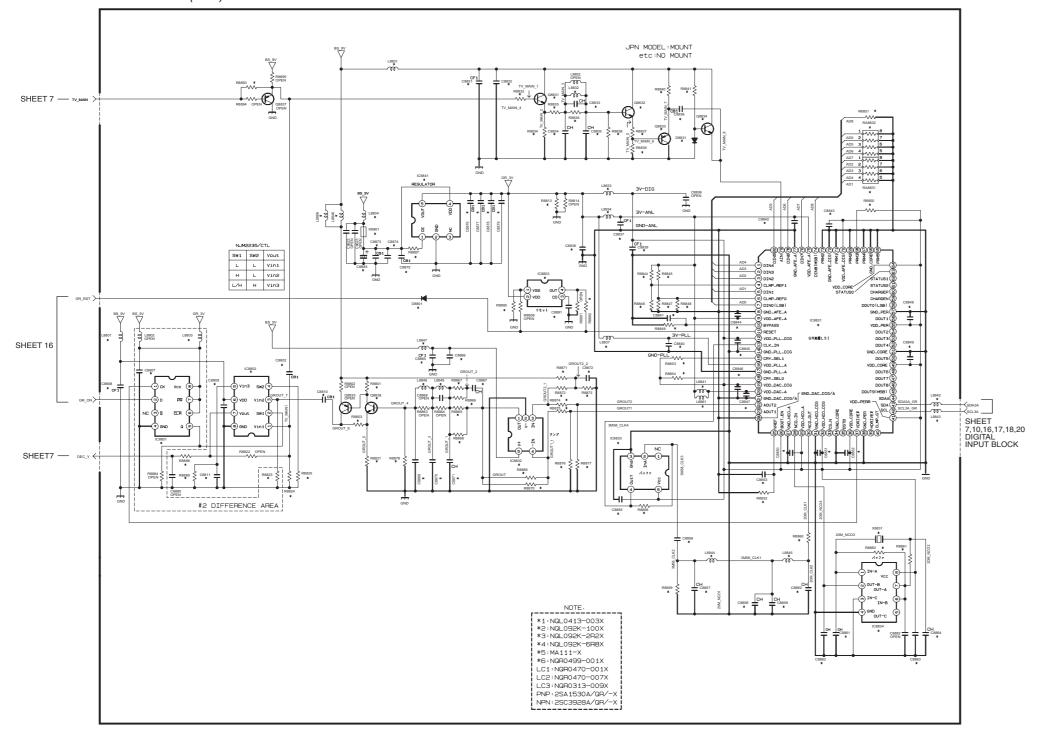



DIGITAL PWB ASS'Y (2/16)


SFL0D254A-U2 [LT-26DX7BJ, LT-26DX7SJ], LCA10599-59C (SFL-0D254A) [LT-26DX7BJ/P, LT-26DX7SJ/P] SFL0D258A-U2 [LT-26X70BU, LT-26X70SU], LCA10599-63C (SFL-0D258A) [LT-26X70BU/P, LT-26X70SU/P] SFL0D253A-U2 [LT-32DX7BJ, LT-32DX7SJ], LCA10599-58C (SFL-0D253A) [LT-32DX7BJ/P, LT-32DX7SJ/P] SFL0D257A-U2 [LT-32X70BU, LT-32X70SU], LCA10599-62C (SFL-0D257A) [LT-32X70BU/P, LT-32X70SU/P]

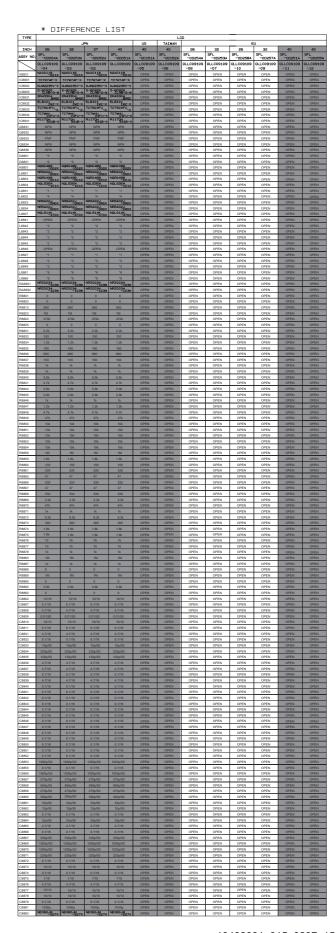



c10408001a015_0207_15/17_0.0

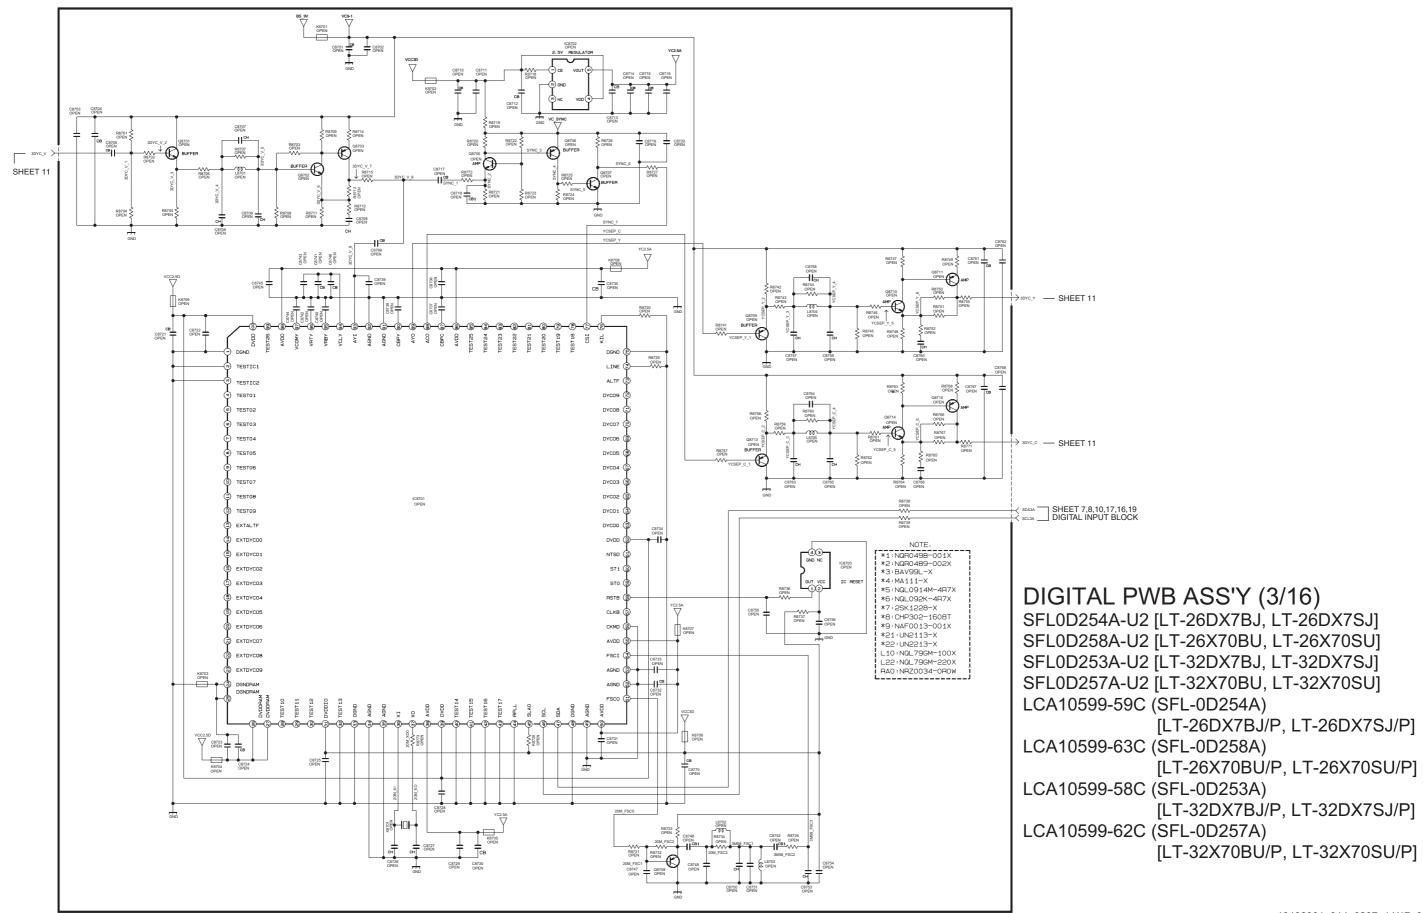


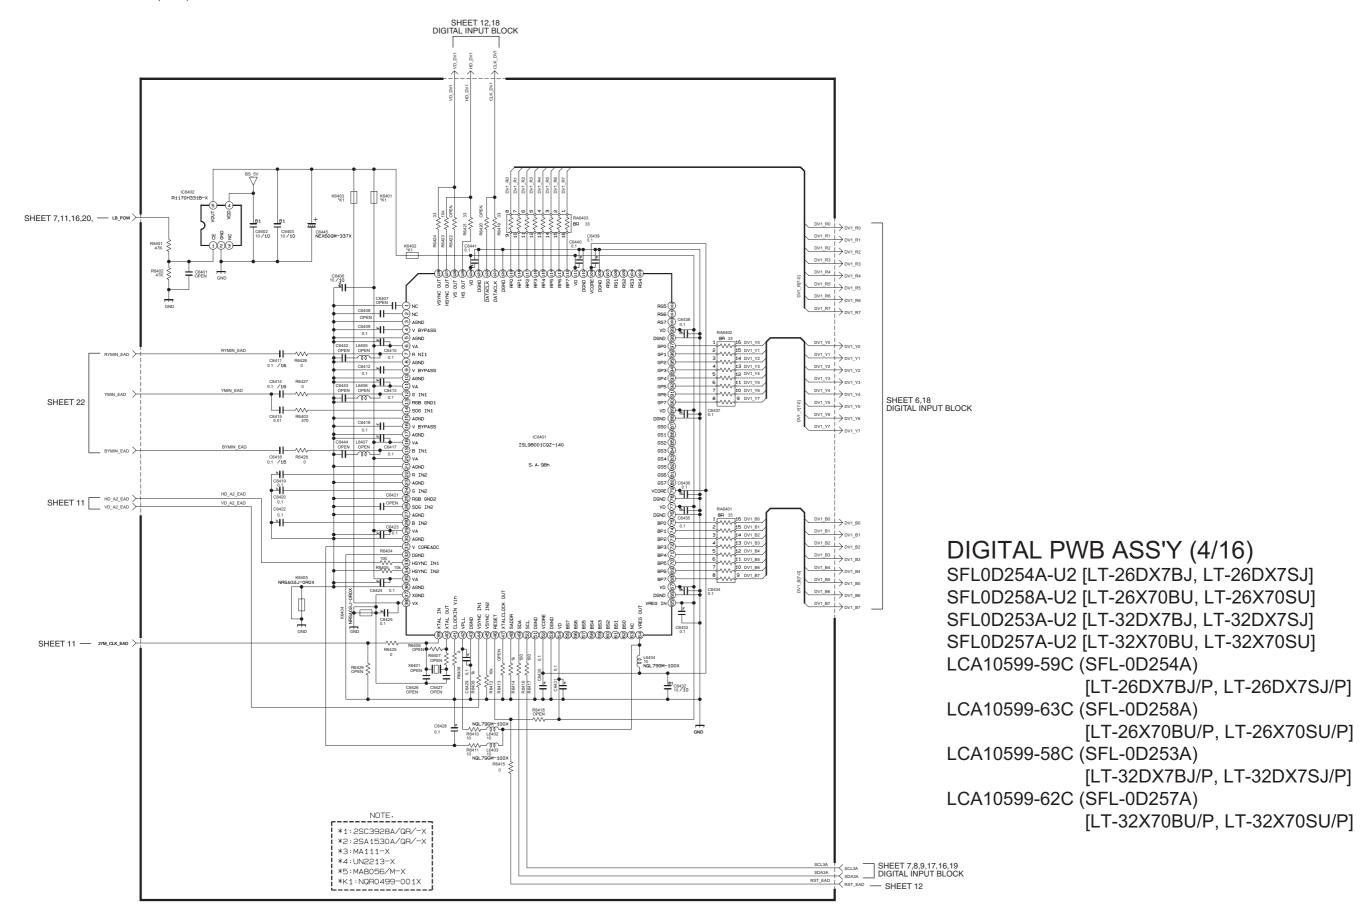

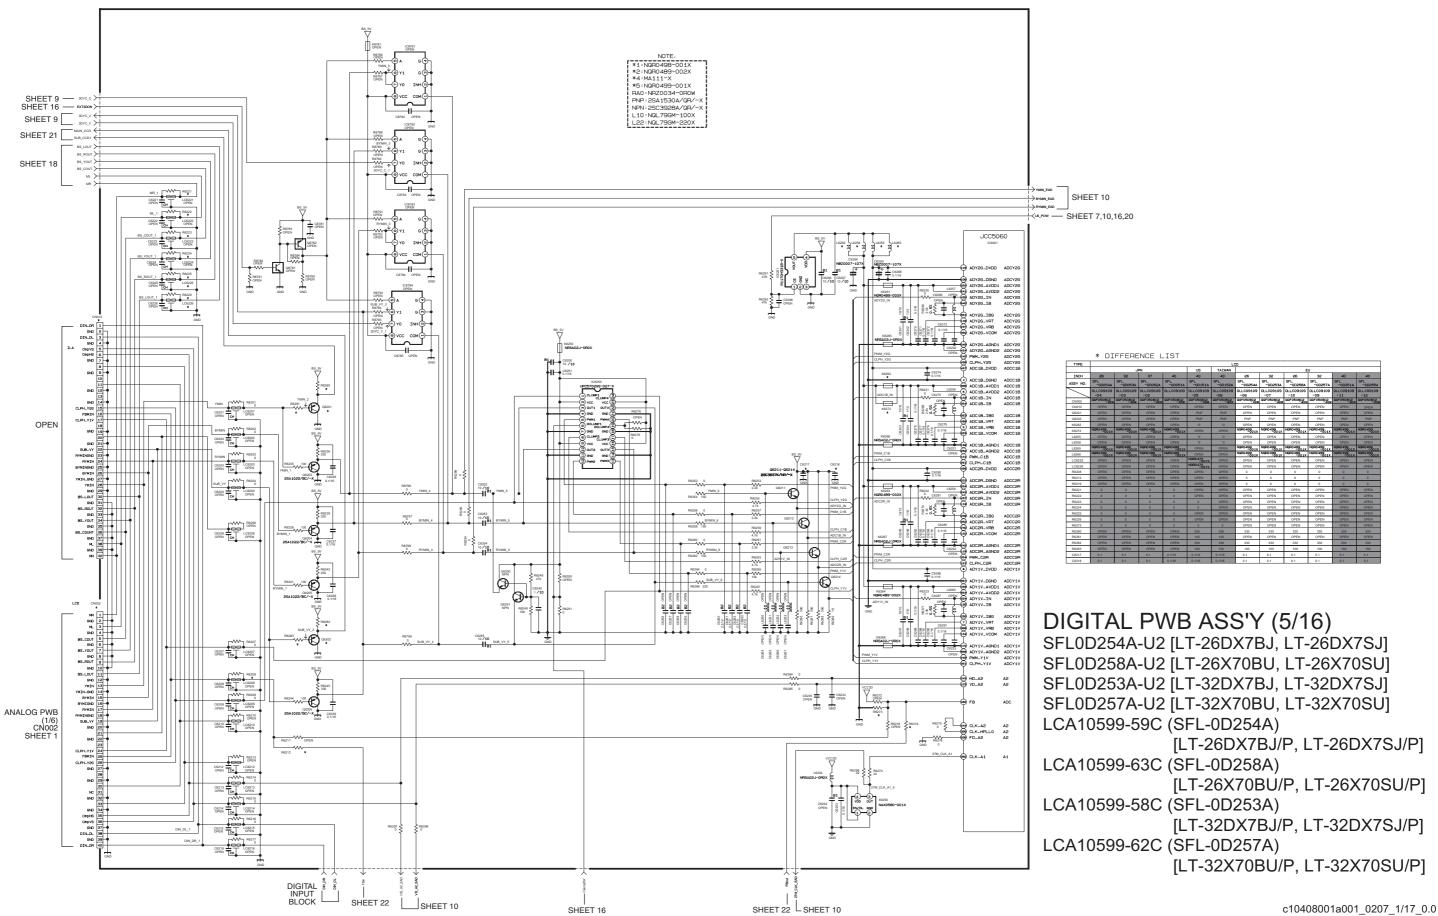

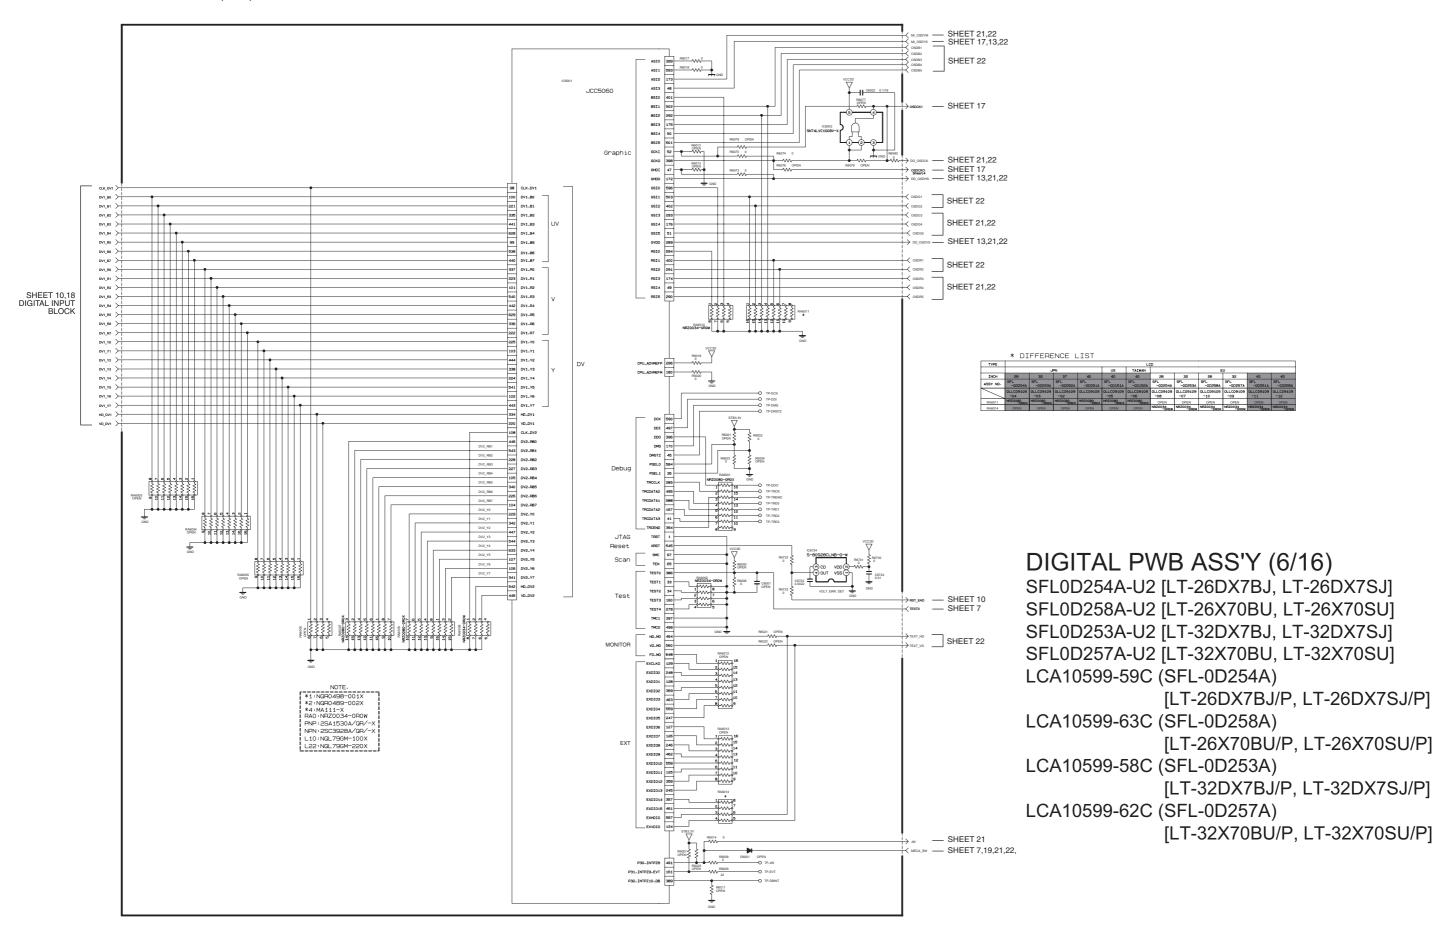

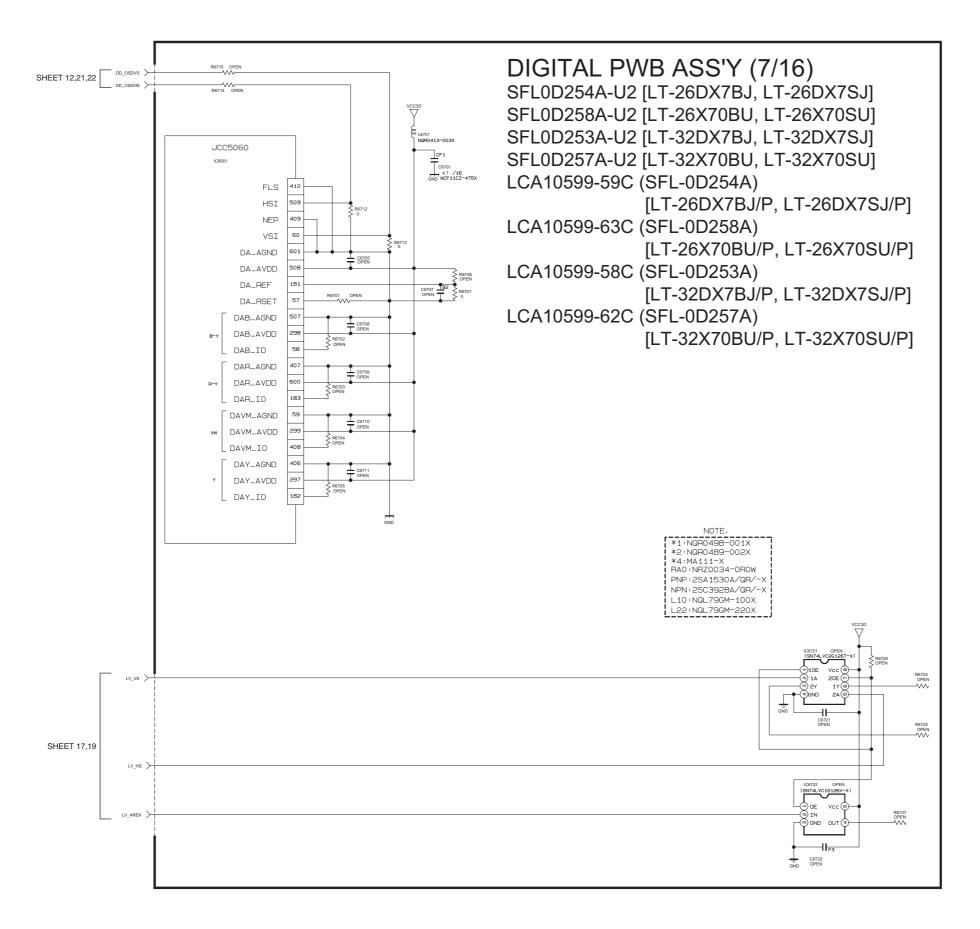

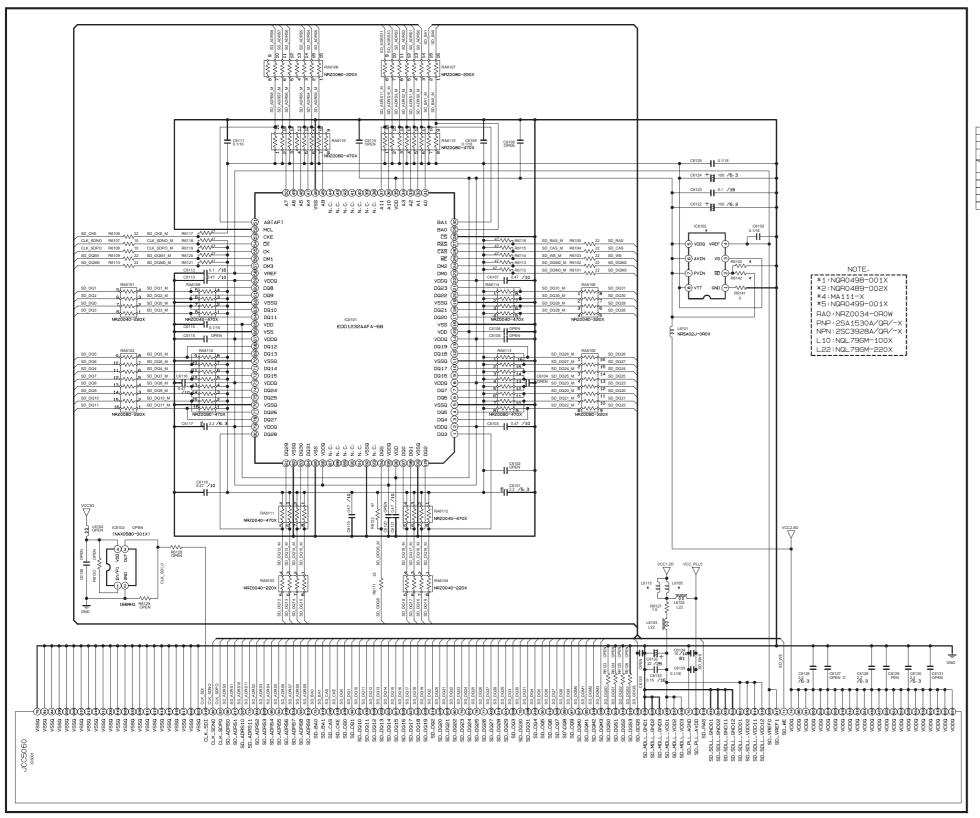



DIGITAL PWB ASS'Y (8/16)

SFL0D254A-U2 [LT-26DX7BJ, LT-26DX7SJ] SFL0D258A-U2 [LT-26X70BU, LT-26X70SU] SFL0D253A-U2 [LT-32DX7BJ, LT-32DX7SJ] SFL0D257A-U2 [LT-32X70BU, LT-32X70SU] LCA10599-59C (SFL-0D254A)

[LT-26DX7BJ/P, LT-26DX7SJ/P]

LCA10599-63C (SFL-0D258A)


[LT-26X70BU/P, LT-26X70SU/P]

LCA10599-58C (SFL-0D253A)

[LT-32DX7BJ/P, LT-32DX7SJ/P]

LCA10599-62C (SFL-0D257A)

[LT-32X70BU/P, LT-32X70SU/P]

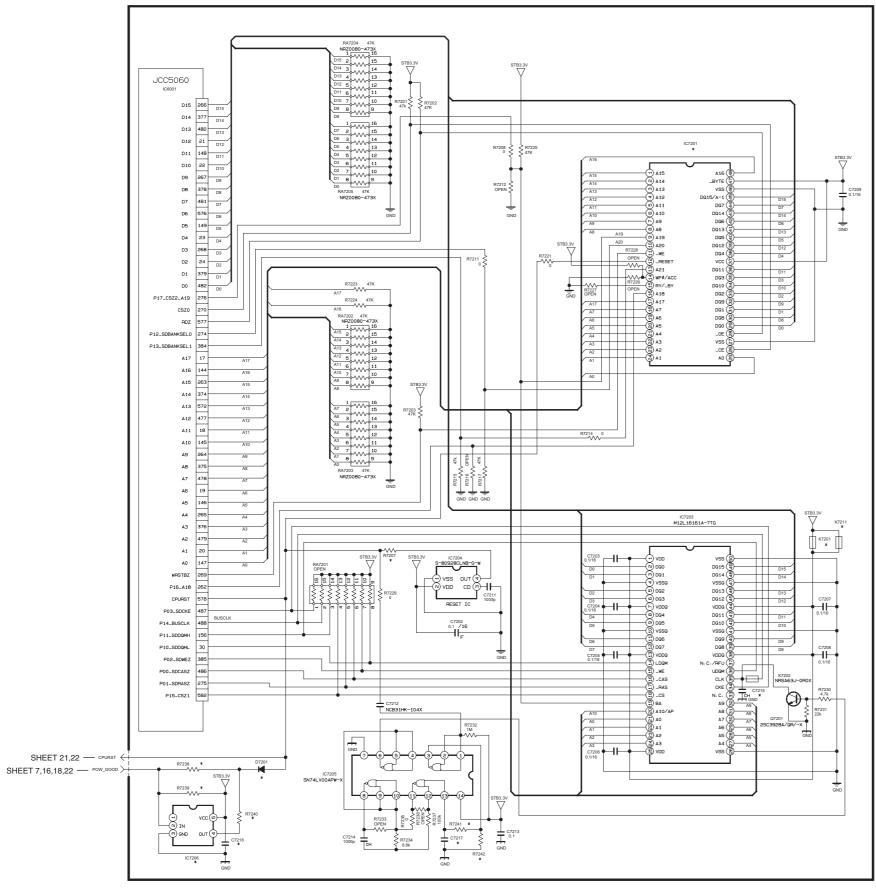

NOTE.

*1: NGH0498-001X
*2: NG90489-002X
*4: MA111-X
RA0: NRZ0034-0ROW
PNP: 2SA1530A/GR/-X
NPN: 2SC3928A/GR/-X
L10: NGL79GM-100X
L22: NGL79GM-220X

	* DI	* DIFFERENCE LIST										
TYPE						LC	D					
	JPN			US	MAWIAT	EU						
INCH	26	32	37	40	40	40	26	32	26	32	40	40
ASSY NO.	SFL -0D054A	SFL -0D053A	SFL -0D052A	SFL -0D051A	SFL -OD151A	SFL -0D152A	SFL -0D254A	SFL -0D253A	SFL -0D258A	SFL -0D257A	SFL -0D251A	SFL -0D2554
	OLLC09109 -04	OLLC09109 -03	OLLC09109 -02	OLLC09109	OLLC09109 -05	OLLC09109 -06	OLLC09109 -08	OLLC09109 -07	OLLC09109 -10	OLLC09109 -09	OLLC09109 -11	OLLC09109
IC7201	39VF800A7 IEKD43	39VF800A7 IEKD44	39VF800A7 IEKD45	39VF800A7 IEKD46	39VF800A7 1EKD47	39VF800A7 IEKD24	39VF800A7 1EKD72	39VF800A7 1EKD73	39VF800A7 1EKD98	39VF800A7 1EKD99	39VF800A7 IEKD48	39VF800A7
IC7206	OPEN	OPEN	74LVC1G17 GW-X	74LVC1G17 GW-X	74LVC1G17 GW-X	74LVC1G17 GW-X	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
D7201	NRSA02J OROX	NRSA02J OROX	OPEN	RB501V -40-X	RB501V -40-X	RB501V -40-X	NRSA02J OROX	NRSA02J OROX	NRSA02J OROX	NRSA02J OROX	RB501V -40-X	R8501V ₄₀ -
K7201	OPEN	OPEN	ODEN	ODEN	NQR0413	NQR0413 -002X	OPEN	OPEN	ODEN	ODEN	ODEN	OPEN
K7211	NQR0499 -002X	NQR0499 -002X	NQR0499 -002X	NQR0499 -002X	OPEN	OPEN	NGR0499 -002X	NQR0499 -002X	NQR0499 -002X	NGR0499 -002X	NQR0499 -002X	NGR0499 -002
R7207	100	100	100	100	100	100	0	0	0	0	100	100
R7238	0	0	OPEN	OPEN	OPEN	OPEN	0	0	0	0	0	0
R7239	OPEN	OPEN	10k	10k	10k	10k	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
R7240	OPEN	OPEN	NGR0199 -003X	NGR0199 -003X	NGR0199 -003X	NGR0199 -003X	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
R7241							0	0	0	0	0	0
R7242							OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
C7215	OPEN	OPEN	OPEN	OPEN	33p							
C7216	OPEN	OPEN	0.1	0.1	0.1	0.1	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
C7217							OPEN	OPEN	OPEN	OPEN	OPEN	OPEN

DIGITAL PWB ASS'Y (9/16)

SFL0D254A-U2 [LT-26DX7BJ, LT-26DX7SJ] SFL0D258A-U2 [LT-26X70BU, LT-26X70SU] SFL0D253A-U2 [LT-32DX7BJ, LT-32DX7SJ] SFL0D257A-U2 [LT-32X70BU, LT-32X70SU]

LCA10599-59C (SFL-0D254A)

[LT-26DX7BJ/P, LT-26DX7SJ/P]

LCA10599-63C (SFL-0D258A)


[LT-26X70BU/P, LT-26X70SU/P]


LCA10599-58C (SFL-0D253A)

[LT-32DX7BJ/P, LT-32DX7SJ/P]

LCA10599-62C (SFL-0D257A)

[LT-32X70BU/P, LT-32X70SU/P]

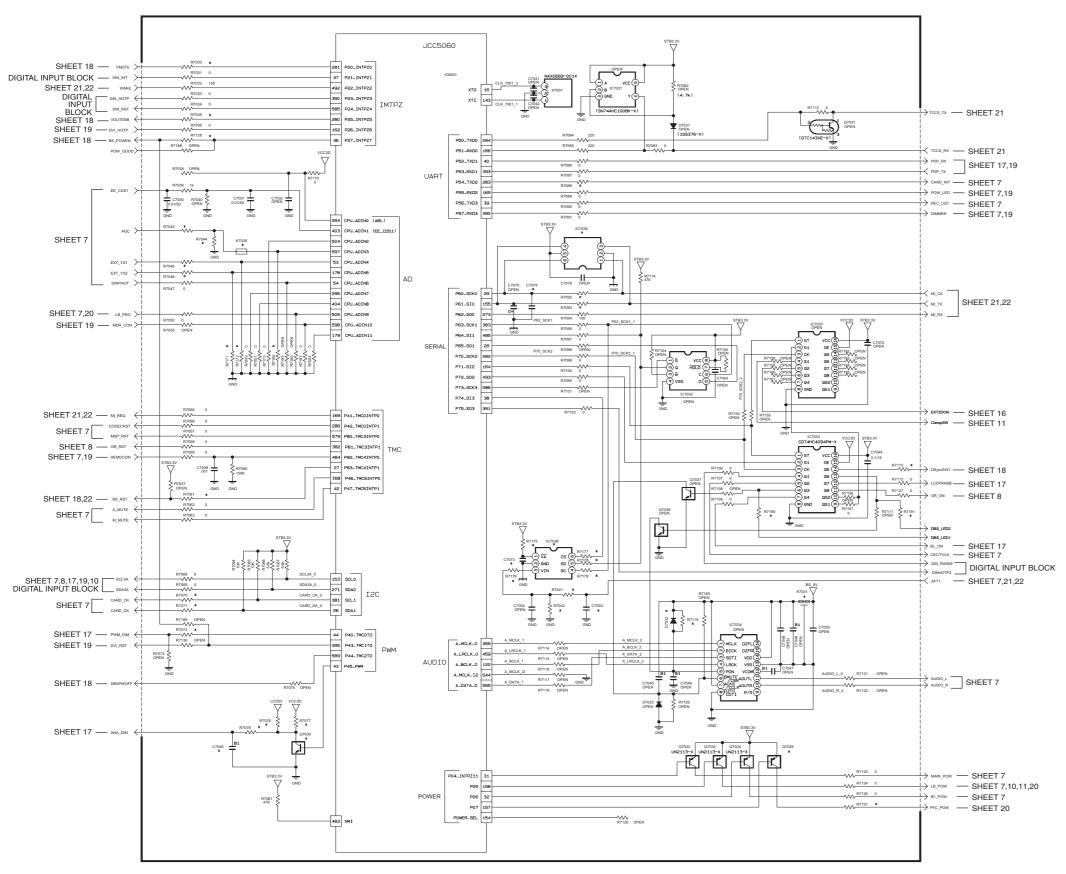

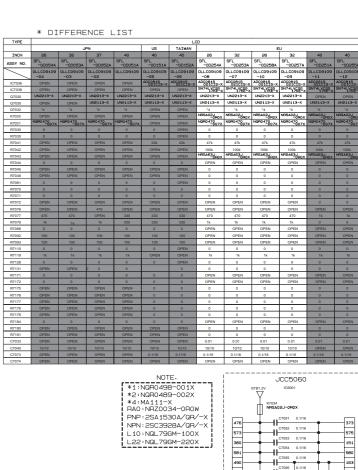

DIGITAL

PWB ASS'Y (10/16)

SFL0D254A-U2 [LT-26DX7BJ, LT-26DX7SJ] SFL0D258A-U2 [LT-26X70BU, LT-26X70SU] SFL0D253A-U2 [LT-32DX7BJ, LT-32DX7SJ]

SFL0D257A-U2 [LT-32X70BU, LT-32X70SU]

LCA10599-59C (SFL-0D254A)

[LT-26DX7BJ/P, LT-26DX7SJ/P]

LCA10599-63C (SFL-0D258A)

[LT-26X70BU/P, LT-26X70SU/P]


LCA10599-58C (SFL-0D253A)


[LT-32DX7BJ/P, LT-32DX7SJ/P]


LCA10599-62C (SFL-0D257A)

[LT-32X70BU/P, LT-32X70SU/P]


c10408001a009_0207_9/17_0.0

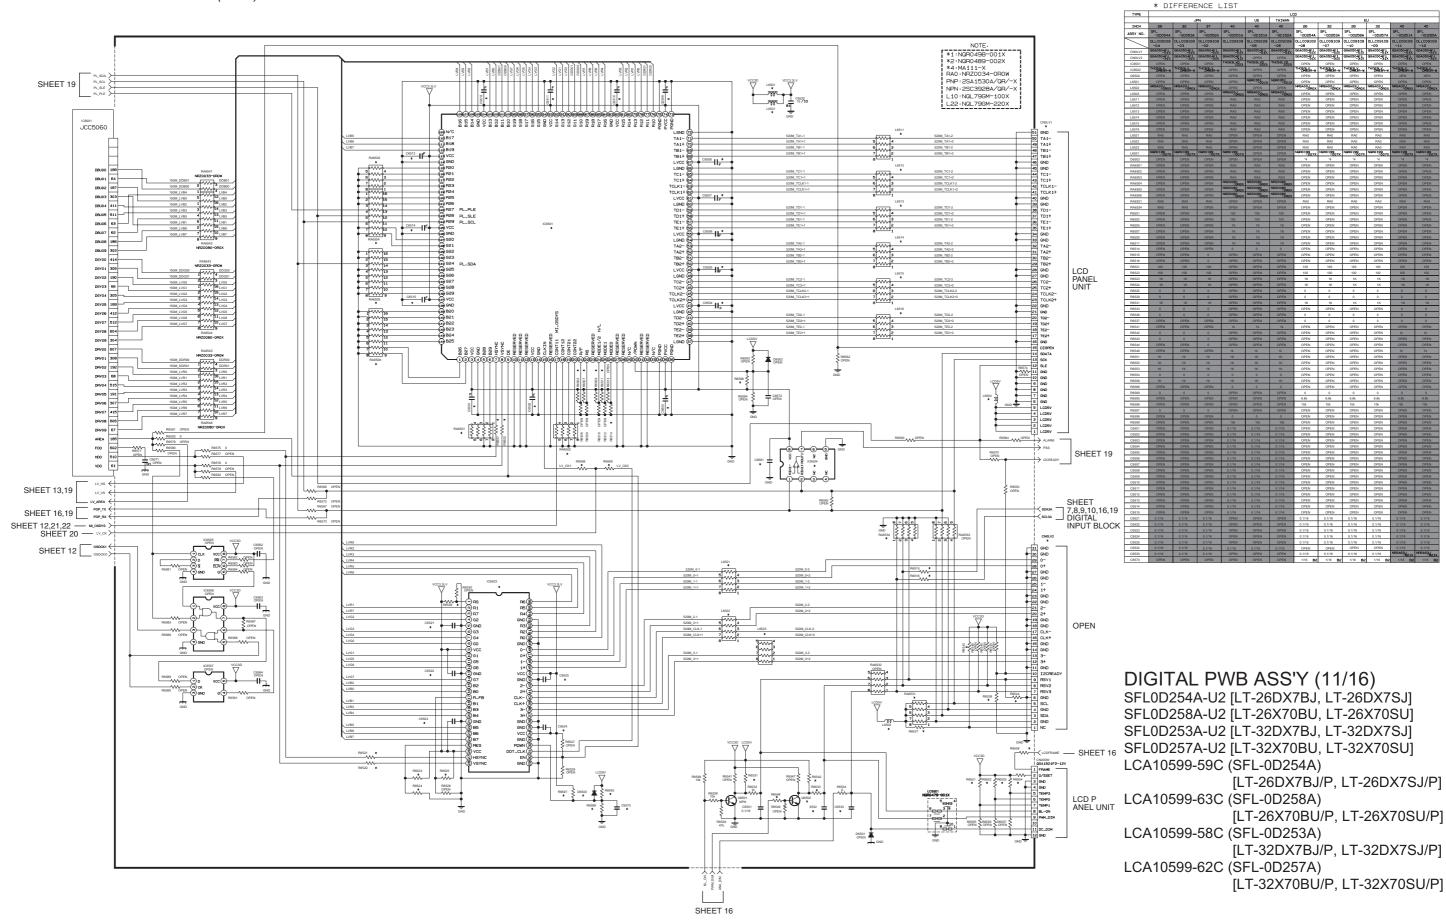


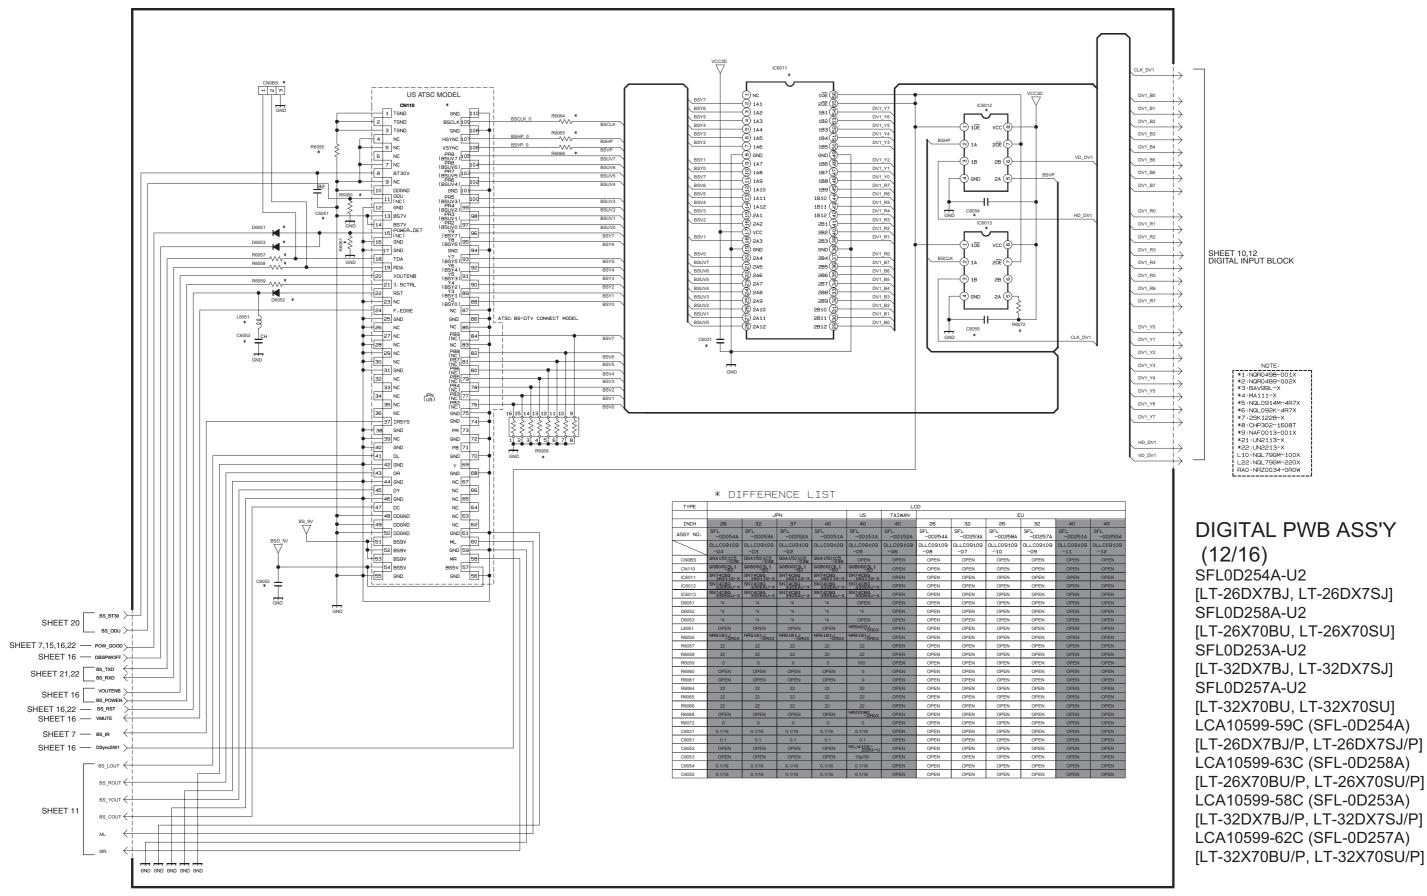


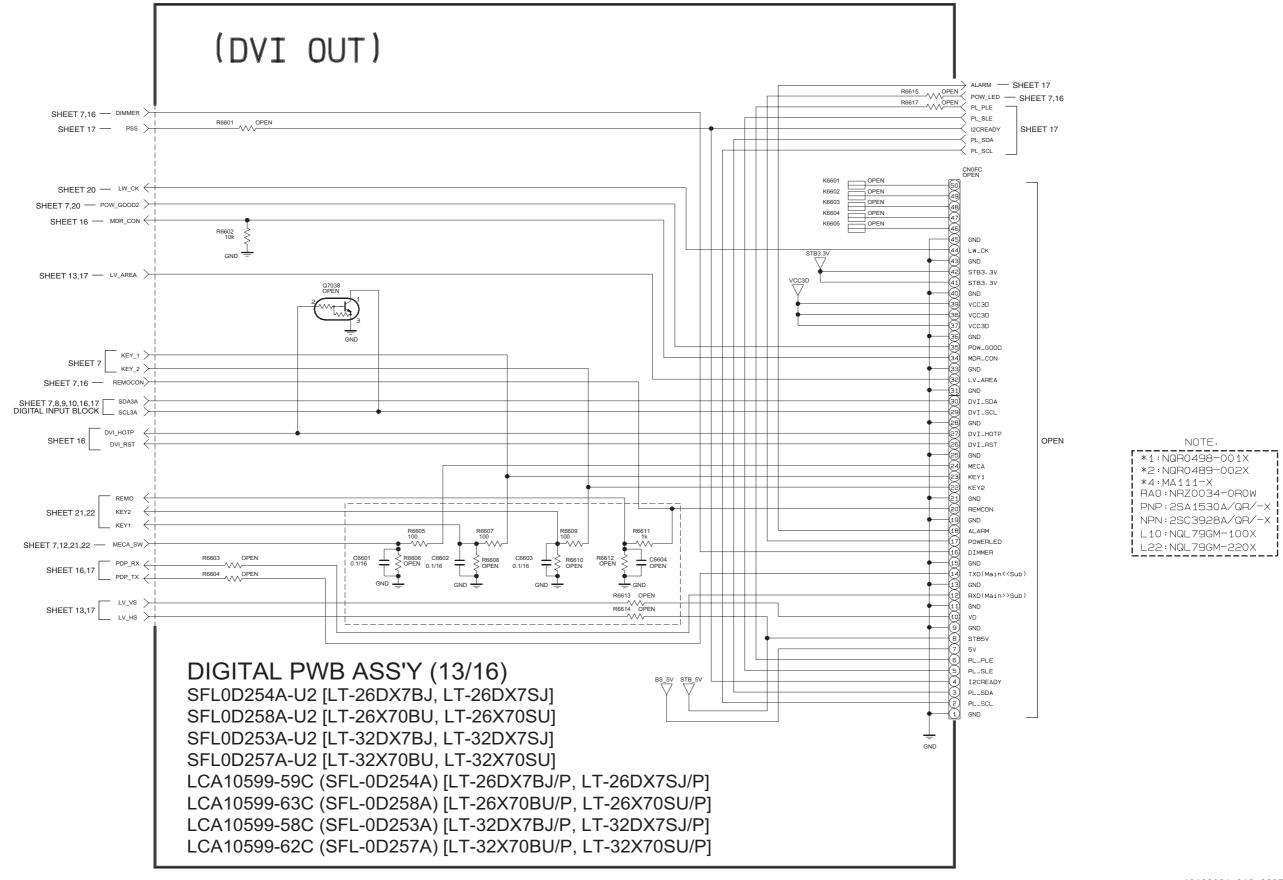



c10408001a012_0207_12/17_0.0

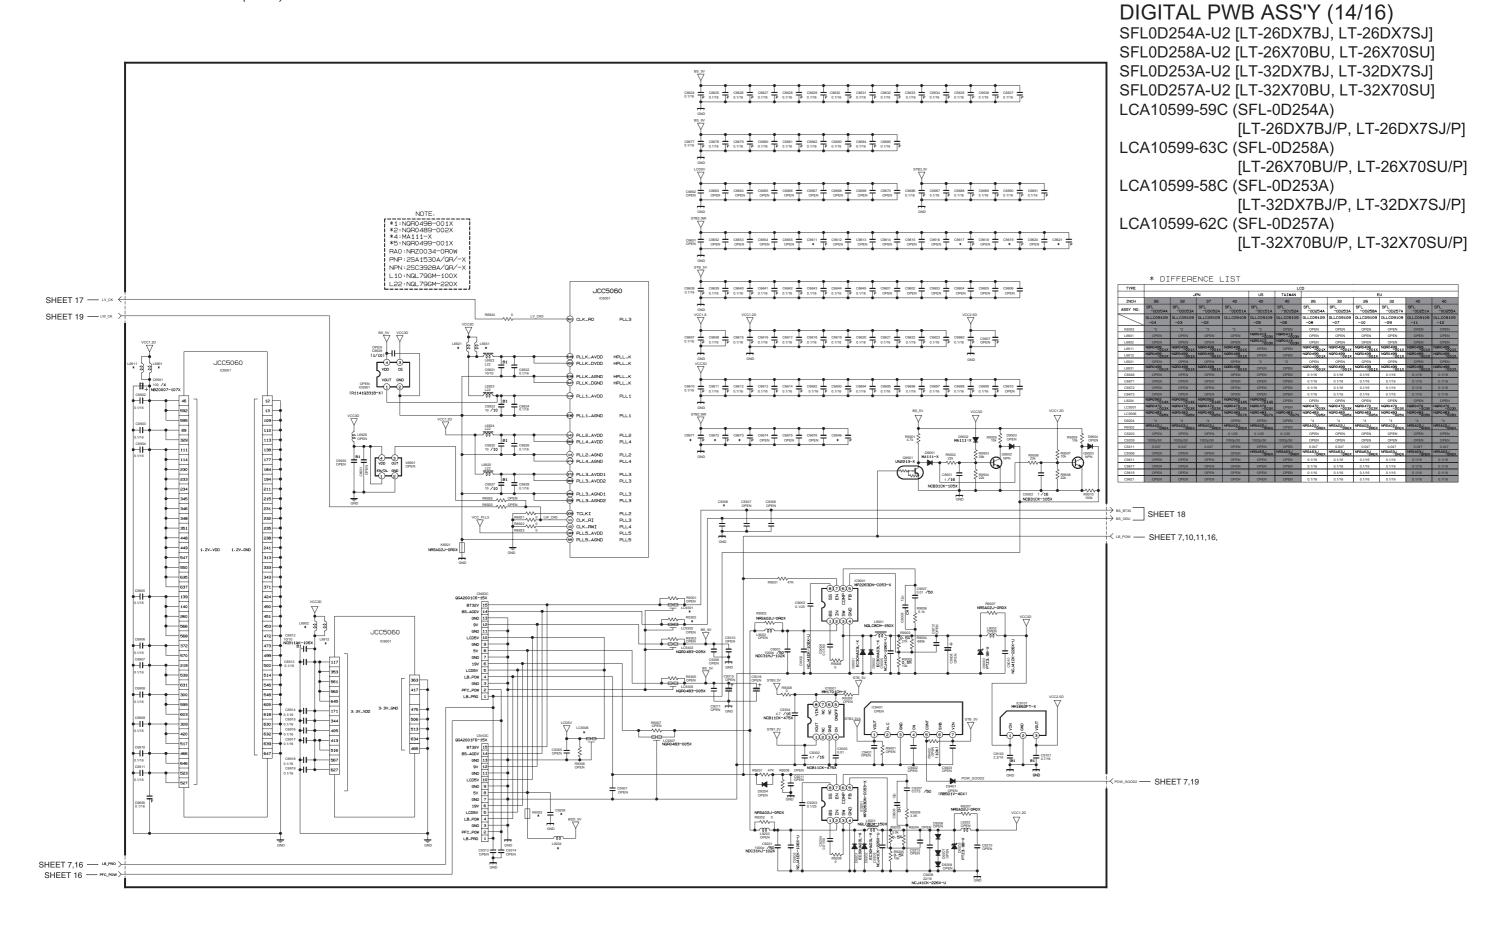

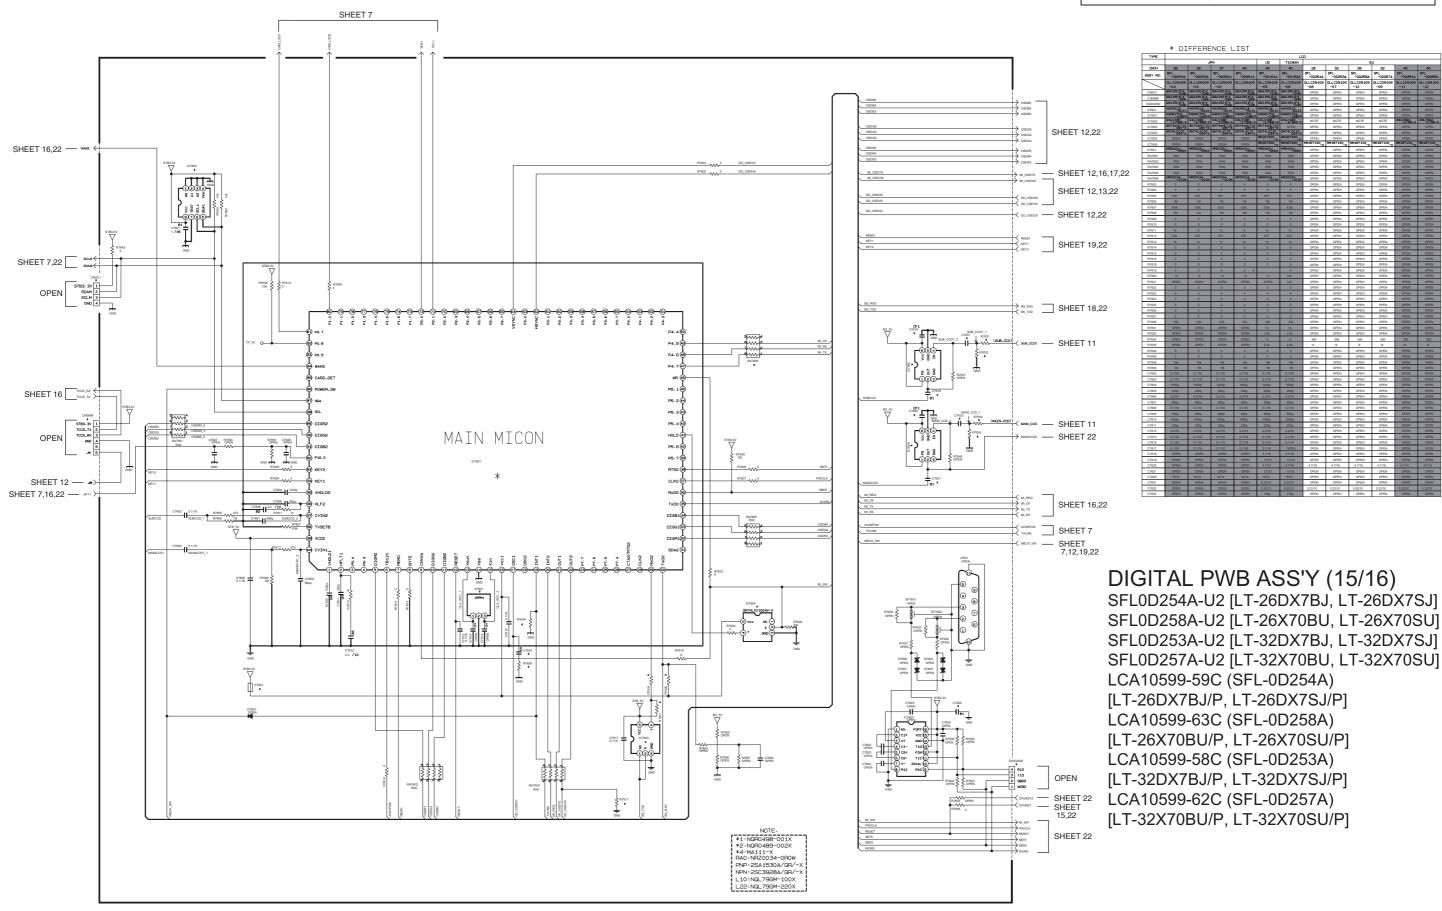


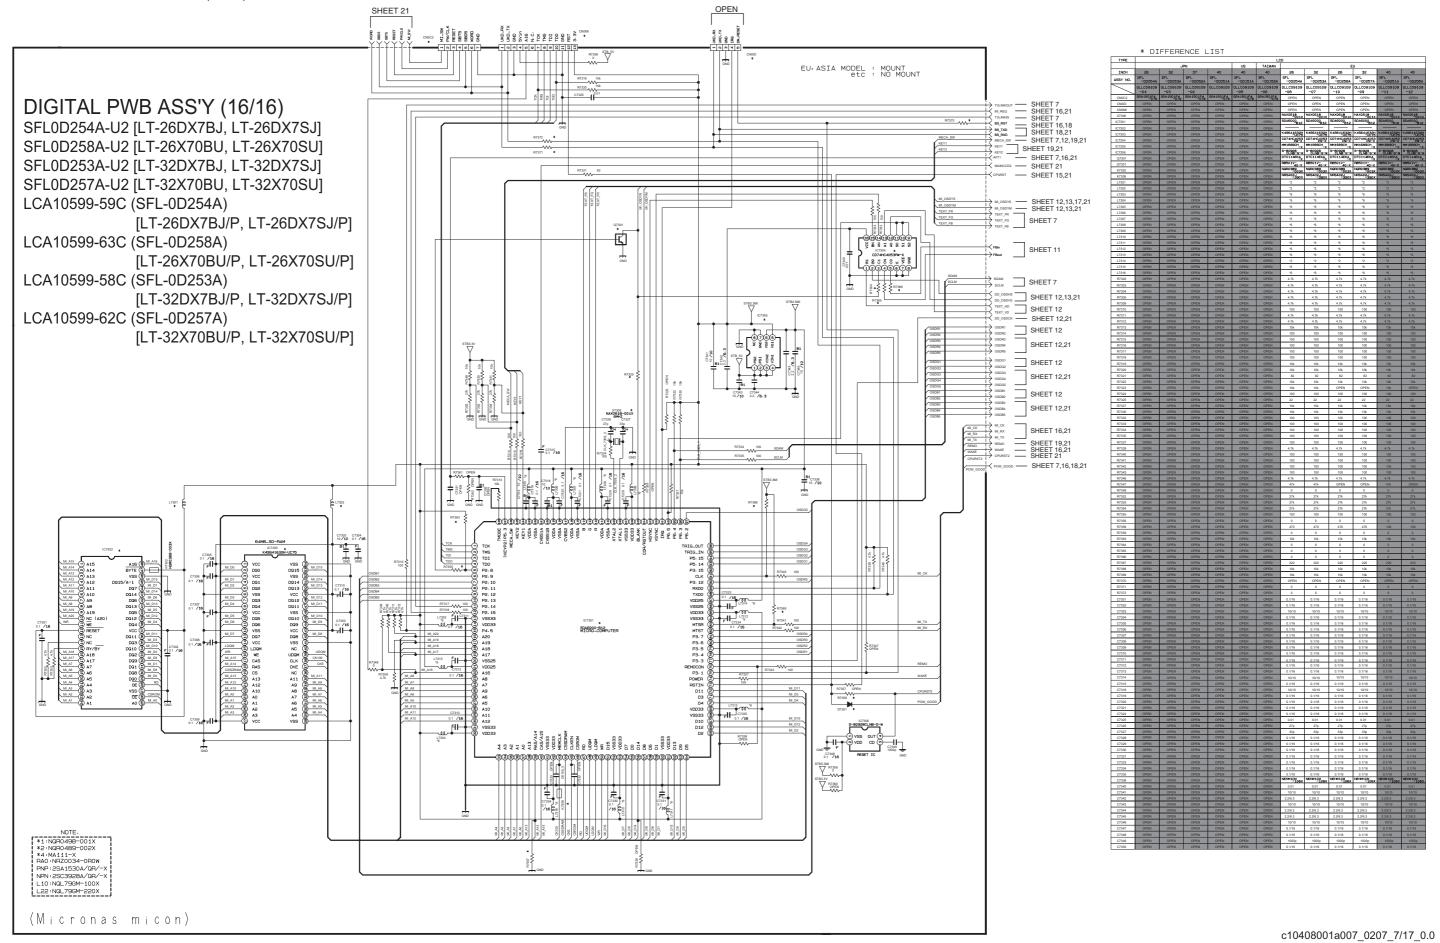

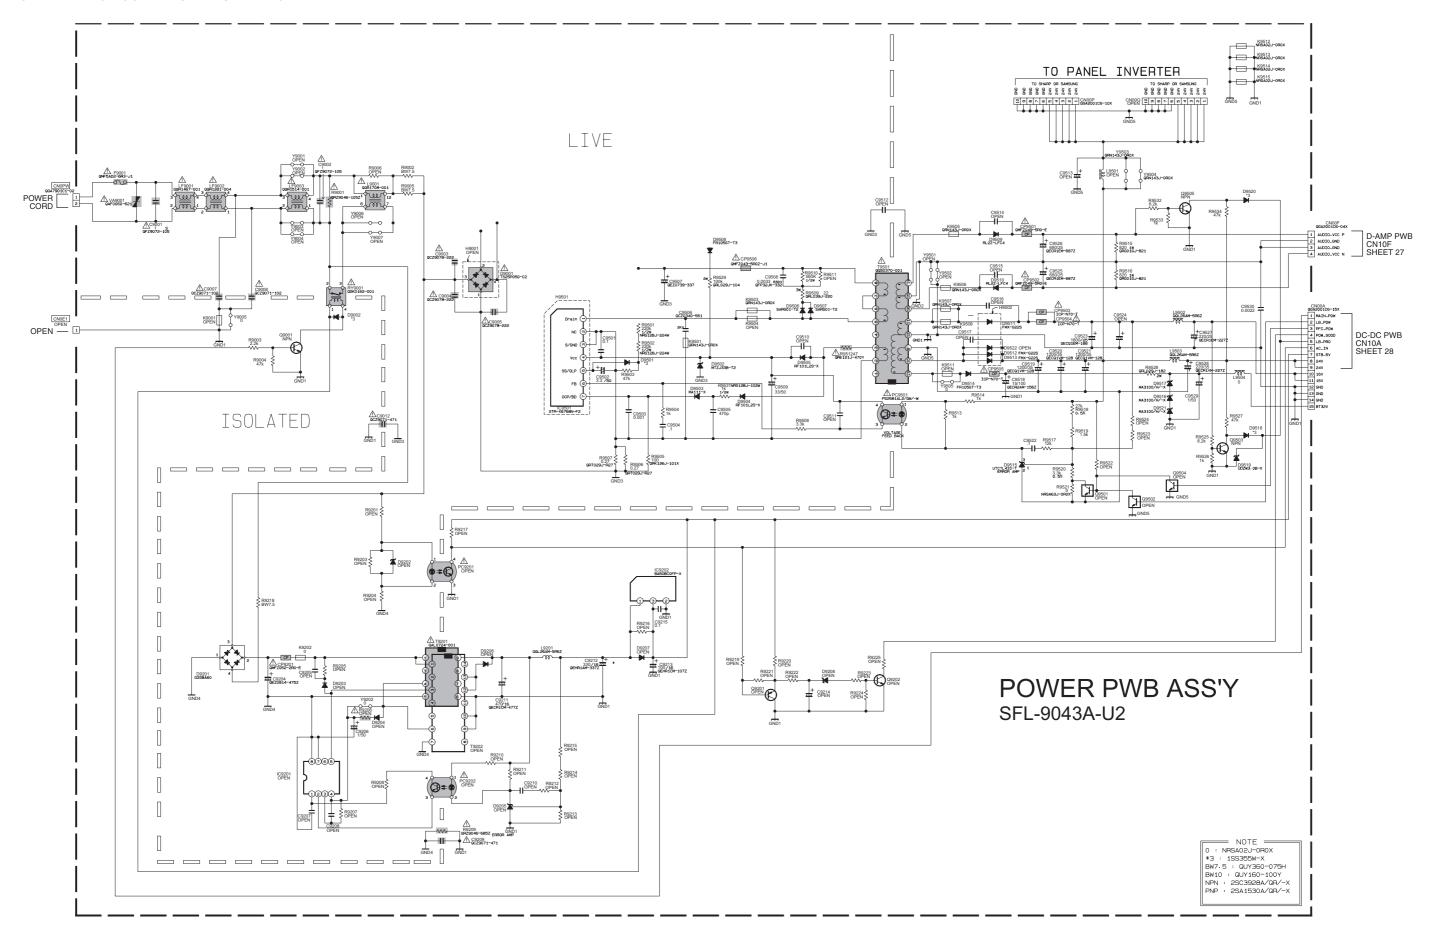

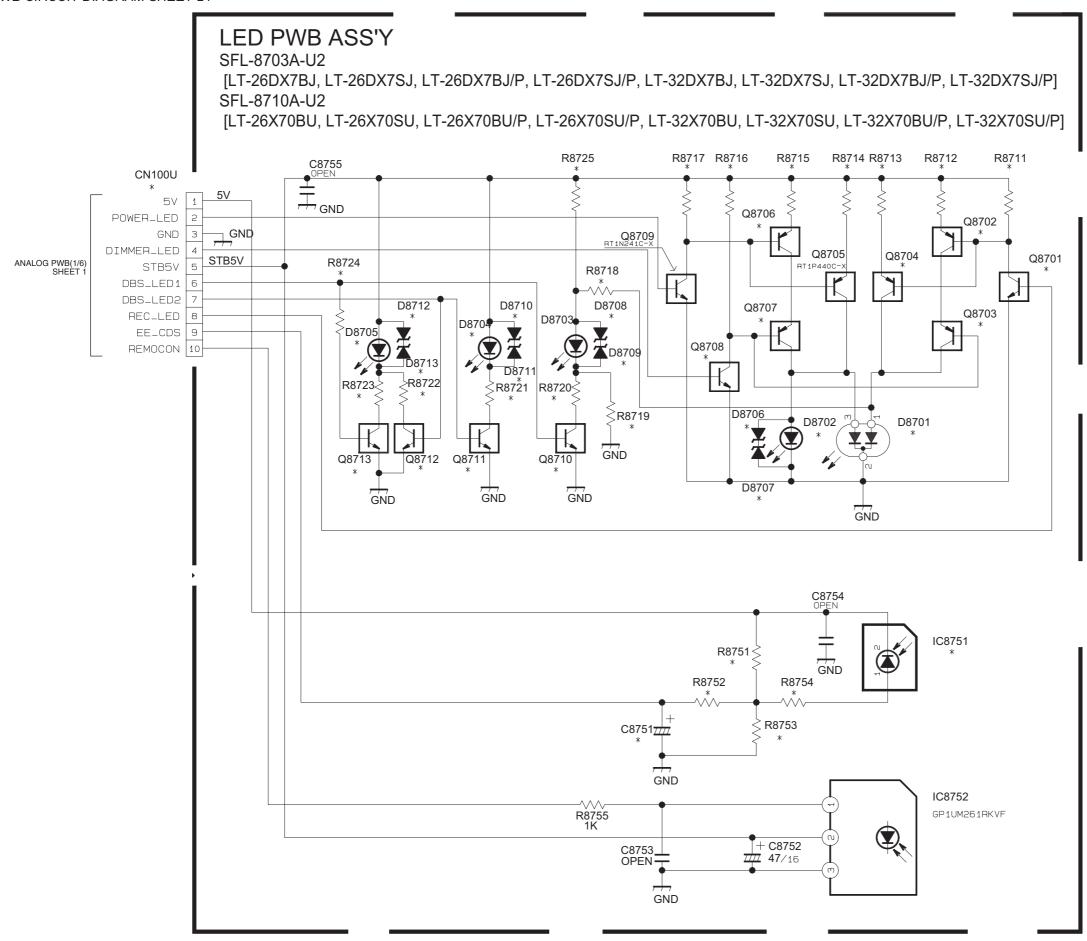



*DTF	FERENCE	FITST
NOTE	IDTV26/32	NON-IDTV26/3
ASSY NO.	SFL-8703A	SFL-8710A
	OLLC09103 -07	OLLC09103
D8701	SML72420C-T	OPEN
D8702	OPEN	SEL5E20C-T
D8703	OPEN	OPEN
D8704	OPEN	OPEN
D8705	SELU5E20C-T	SELU5E20C-
D8706	OPEN	MA8068-X
D8707	OPEN	MA8068-X
D8708	OPEN	OPEN
D8709	OPEN	OPEN
D8710	OPEN	OPEN
D8711	OPEN	OPEN
D8712		MA8068-X
D8713		MA8068-X
	RT1P440C-X	OPEN
Q8702	OPEN	OPEN
Q8703		OPEN
	RT1P440C-X	OPEN
Q8706	OPEN	OPEN
Q8707	OPEN	OPEN
Q8708	OPEN	OPEN
Q8710		OPEN
Q8711		OPEN
	RT1N241C-X	
	RT1N241C-X	
R8711	10K	OPEN
R8712	OPEN	OPEN
R8713	330	OPEN
R8714	330	330
R8715	OPEN	OPEN
R8716	OPEN	OPEN
R8717		10K
R8718	OPEN	OPEN
R8719	OPEN	OPEN
R8720	OPEN	OPEN
R8721	OPEN	OPEN
R8722	100	100
R8723	270	270
R8724	0	0
R8725	OPEN	OPEN
IC8751	OPEN	OPEN
R8751	OPEN	OPEN
R8752		_
R8753	OPEN	OPEN OPEN
R8754	OPEN OPEN	OPEN
C8751	OPEN	OPEN
CN100L		
	OPEN JOGA 1217F 1	OPEN QGA1217F1
CINZUUL	-10X	-10X

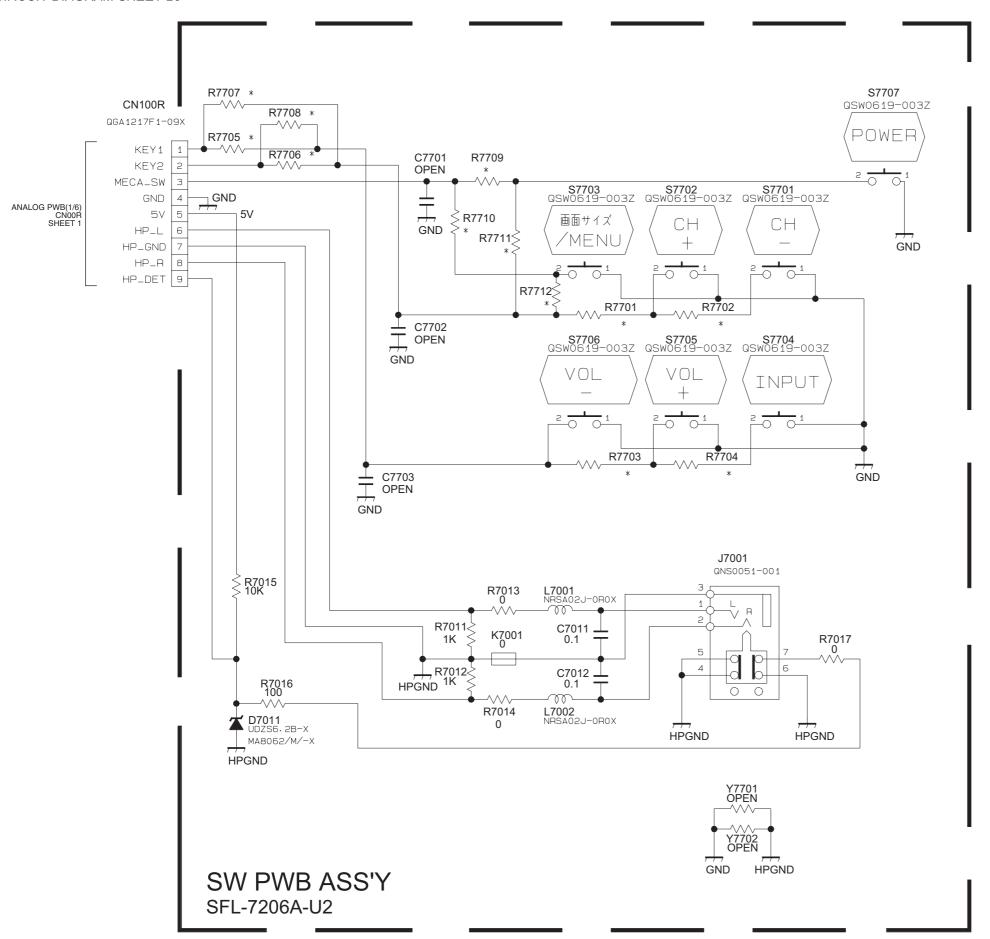

*DIFFERENCE LIST


NOTE	IDTV26/32 NON-IDTV26/32
ASSY No.	SFL-7206A
	0LLC09105 -04
R7701	4.7K
R7702	8.2K
R7703	4.7K
R7704	8.2K
R7705	OPEN
R7706	OPEN
R7707	0
R7708	0
R7709	OPEN
R7710	0
R7711	0
R7712	OPEN

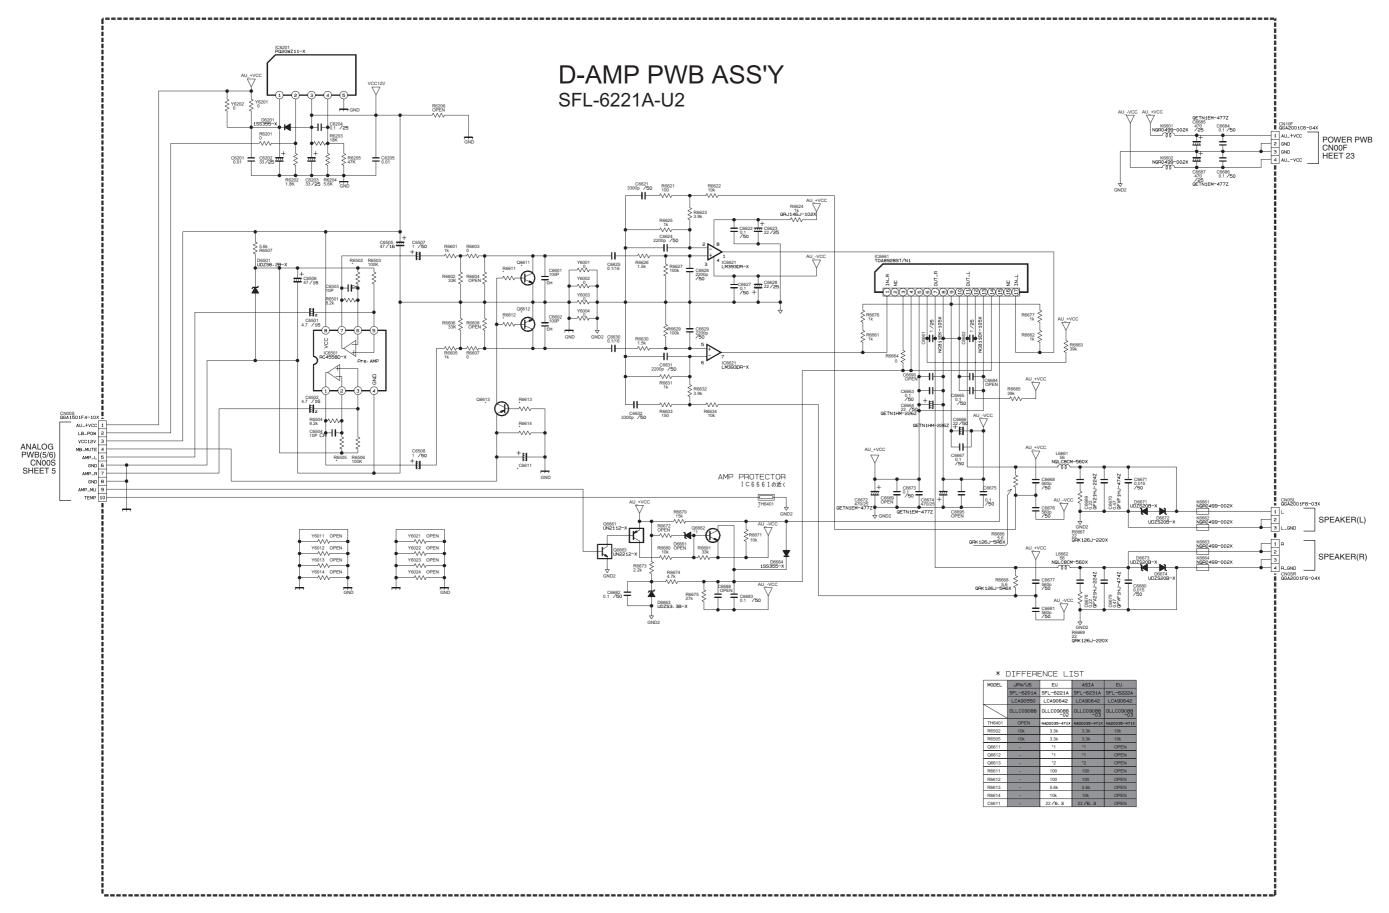

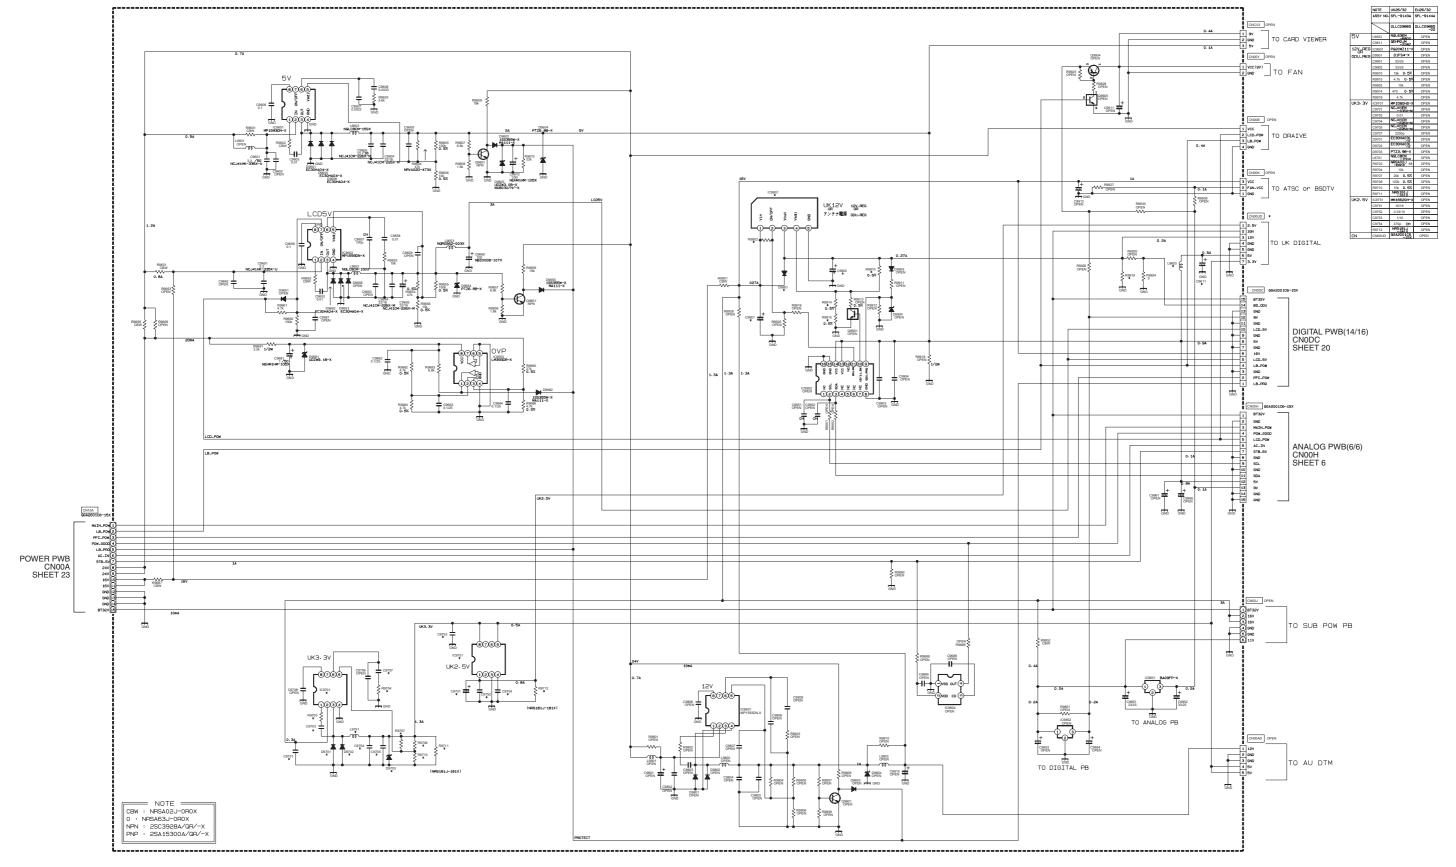


DC-DC PWB ASS'Y


SFL-9143A-U2 [LT-26DX7BJ, LT-26DX7SJ, LT-26DX7BJ/P, LT-26DX7SJ/P, LT-32DX7BJ, LT-32DX7SJ, LT-32DX7BJ/P, LT-32DX7SJ/P] SFL-9144A-U2 [LT-26X70BU, LT-26X70SU, LT-26X70BU/P, LT-26X70SU/P, LT-32X70BU, LT-32X70BU/P, LT-32X70SU/P]

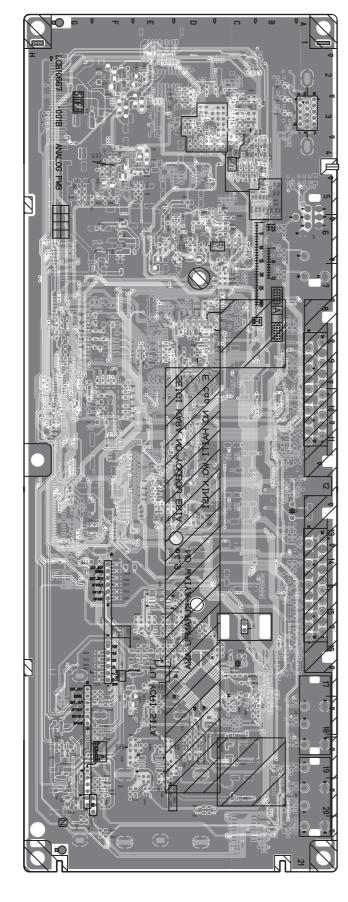




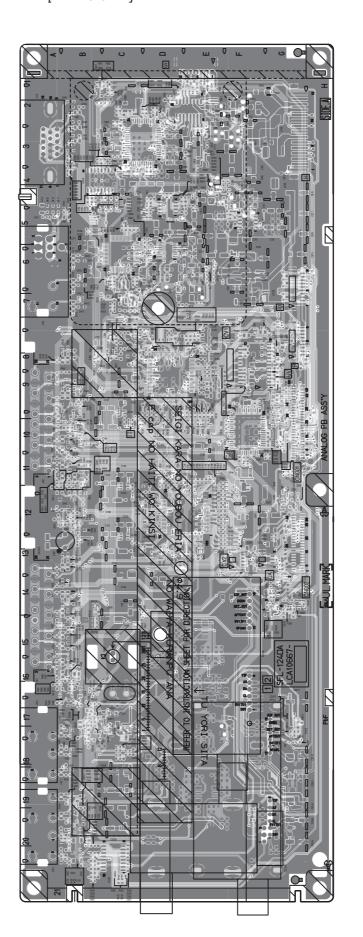



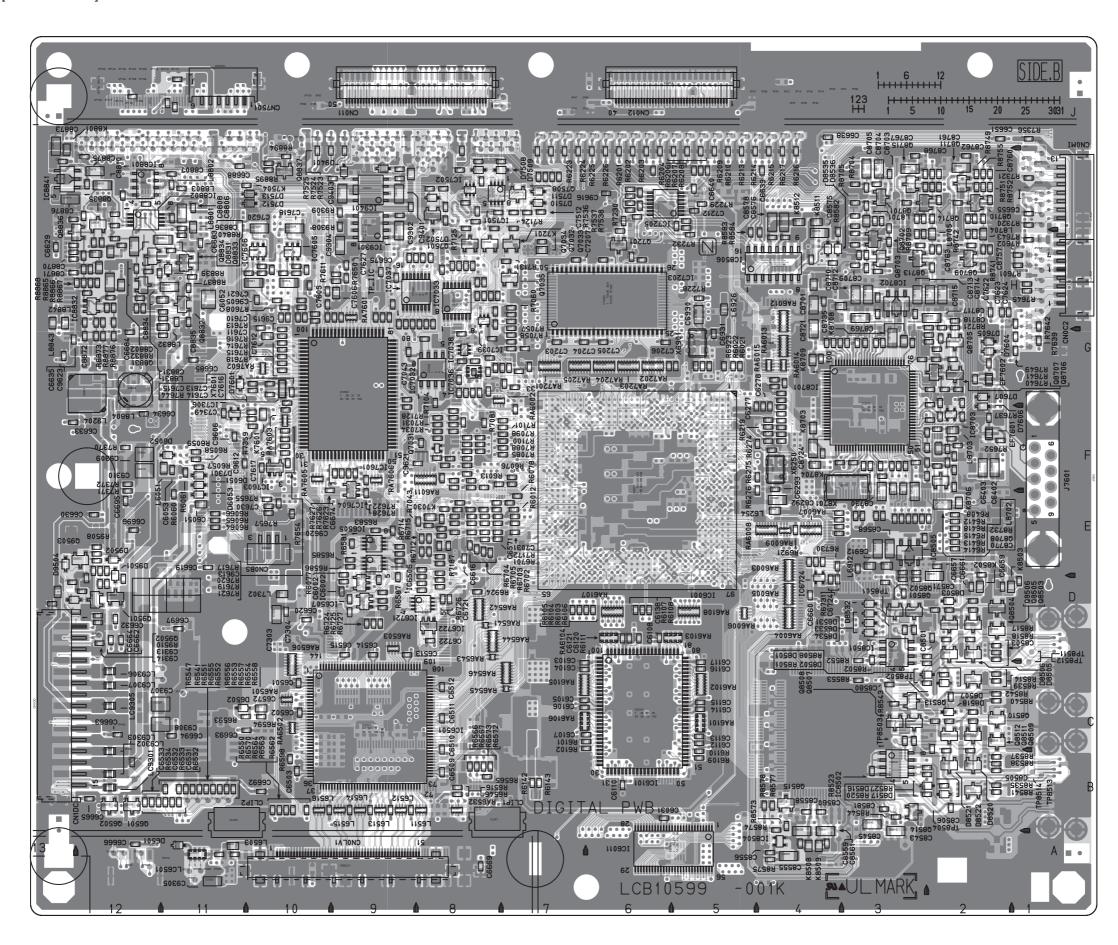





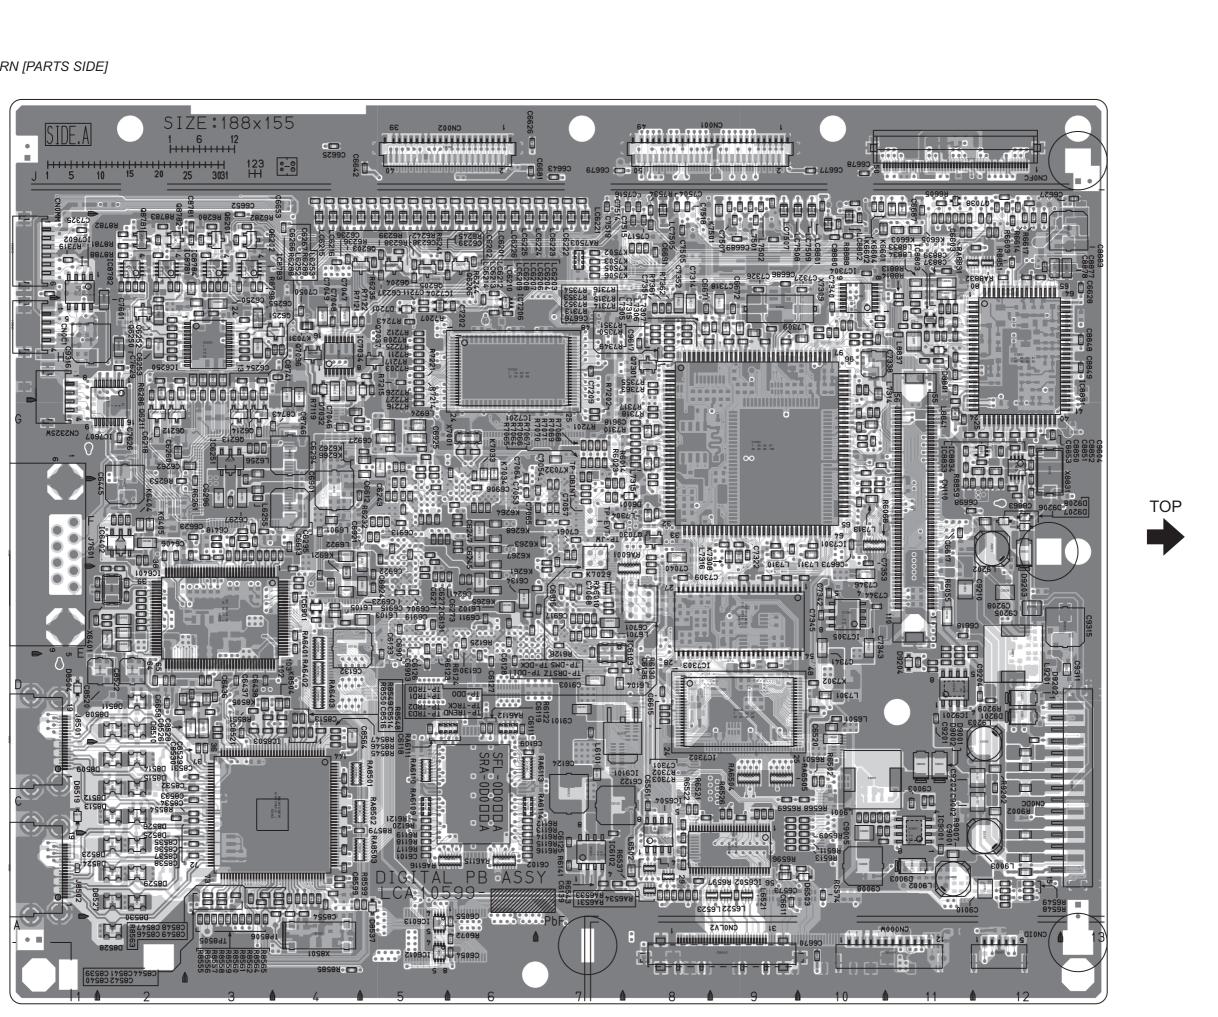



TOP

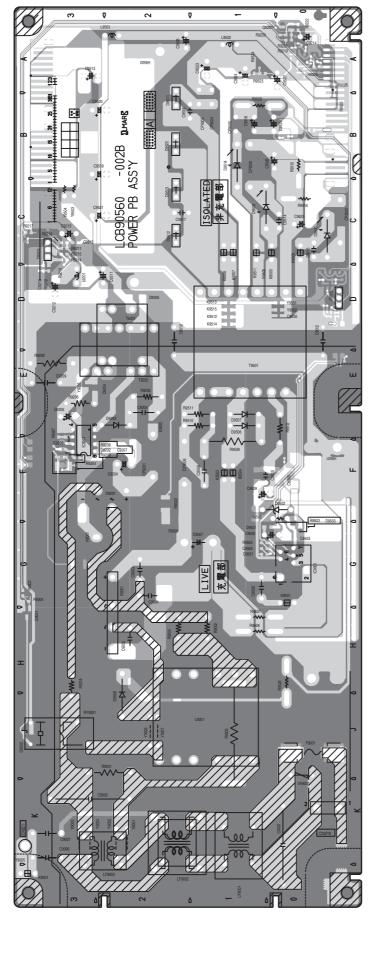


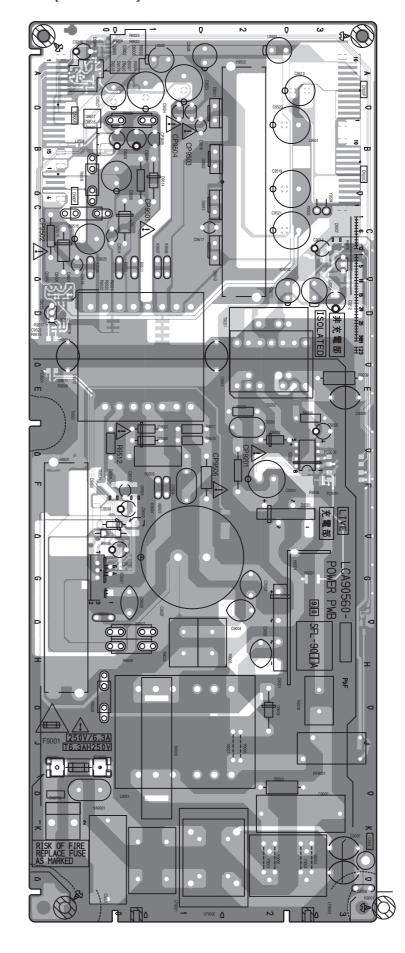





DC DC PWB PATTERN [SOLDER SIDE] < LT-26X70BU, LT-26X70SU, LT-26X70BU/P, LT-26X70SU/P, LT-32DX7BJ. LT-32DX7SJ, LT-32DX7BJ/P, LT-32DX7SJ/P, LT-32X70BU, LT-32X70SU, LT-32X70BU/P, LT-32X70SU/P >



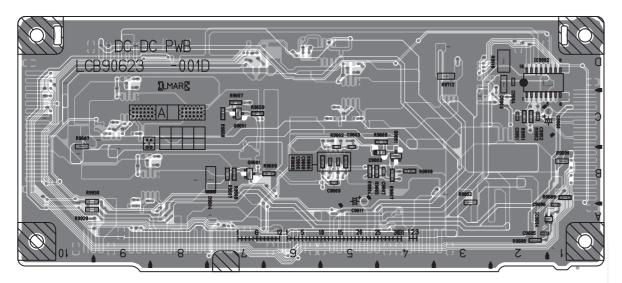


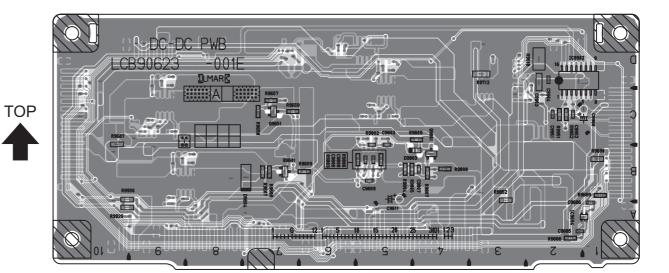

DC DC PWB PATTERN [PARTS SIDE]

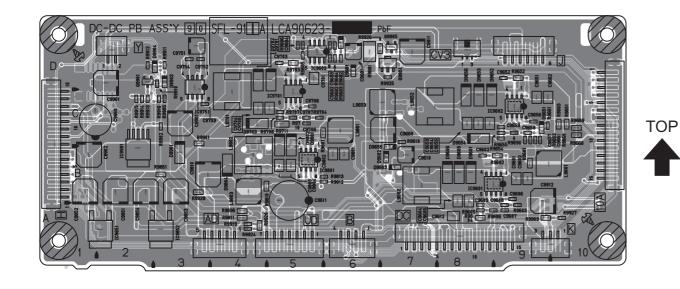


DC DC PWB PATTERN [PARTS SIDE]

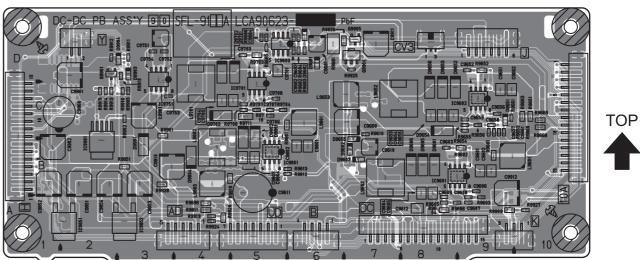





LED PWB PATTERN [SOLDER SIDE] < LT-26DX7BJ, LT-26DX7SJ, LT-26DX7BJ/P, LT-26DX7SJP >

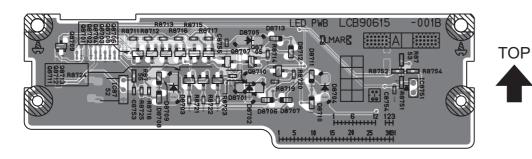


LED PWB PATTERN [PARTS SIDE]

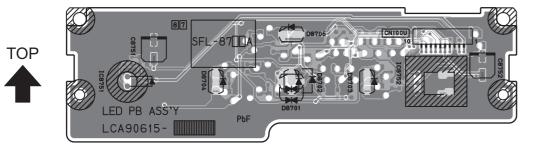

LED PWB PATTERN [SOLDER SIDE] < LT-26X70BU, LT-26X70SU, LT-26X70BU/P, LT-26X70SU/P, LT-32DX7BJ. LT-32DX7SJ, LT-32DX7BJ/P, LT-32DX7SJ/P, LT-32X70BU, LT-32X70SU, LT-32X70BU/P, LT-32X70SU/P >

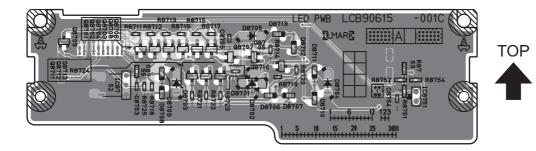


LED PWB PATTERN [PARTS SIDE]

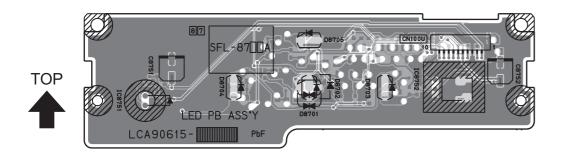


SW PWB PATTERN [SOLDER SIDE]




SW PWB PATTERN [PARTS SIDE]



D-AMP PWB PATTERN [SOLDER SIDE]

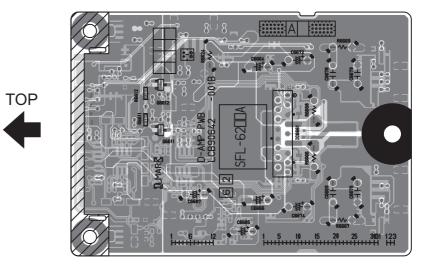

D-AMP PWB PATTERN [PARTS SIDE]

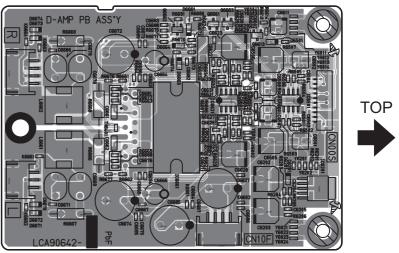



VOLTAGE CHARTS

VOLIA <analog pwb=""></analog>	AGE CH	IAKIS																<power pwb=""></power>	<d-amp pwb=""></d-amp>	<dc dc="" pwb=""></dc>
[P.2-7 - P.2-8]	MODE DO (10)	MODE DO (1)	[P.2-9 - P.2-10]	MODE DO 40	MODE DC (V)	[P.2-15 - P.2-16]	MODE DO (10)	MODE DO (1)	MODE DO 00	MODE DO (1)	[P.2-35 - P.2-36]	MODE DO (1)	[P.2-39 - P.2-40] MODE P.2-40]	MODE DO (1/1)	[P.2-49 - P.2-50]	MODE DO (V)	MODE DO (1)	[P.2-51 - P.2-52]	[P.2-59 - P.2-60]	[P.2-61 - P.2-62]
PIN NO. DC (V)	97 0	PIN NO. DC (V)	PIN NO. DC (V)	90 3.8	PIN NO. DC (V)	PIN NO. DC (V)	PIN NO. DC (V)	PIN NO. DC (V)	PIN NO. DC (V)	PIN NO. DC (V)	PIN NO. DC (V)	PIN NO. DC (V)	PIN NO. DC (V)	PIN NO. DC (V)	PIN NO. DC (V)	PIN NO. DC (V)	16 3.1	IC9202	PIN NO. DC (V)	PIN NO. DC (V)
1 4.5 2 4.4	-	94 2.4 95 0	E 0.1	31 3.8 32 0	1 1.5 2 3.3	1 6.0 2 6.1	C -0.2 B 12.0	56 0 57 0	13 2.3 14 0	16 0 17 1.3	1 0.4 2 0.3	49 0 50 0	1 0 2 2.4	24 1.1 25 1.4	1 3.3	98 3.3 99 3.3	17 2.3 18 3.0	1 6.0	1 14.8 2 3.1	1 9.4 2 23.9
3 0	100 2.6	96 2.4	B -0.1	33 8.0	3 0	3 6.1	Q621	58 0	15 2.3	18 1.3	3 0.2	IC7204	3 0	26 0	3 0.2	100 0	19 2.2	3 4.9	3 12.0	3 4.9
4 4.5 5 4.5	1 0	97 0 98 2.4	Q432 E 0	34 6.4 35 0	4 0 5 0	4 6.1 5 6.1	E 5.1	59 0 60 0	16 5.1 17 0	19 0 20 1.2	4 0.3 5 0.1	1 0 2 3.3	4 2.3 5 0	27 0 28 1.1	4 3.3 5 0	101 3.3 102 1.7	20 0.6 21 0.6	1 107.8	4 2.6 5 0	4 0 5 1.2
6 0 7 4.5	2 2.4 3 2.4	99 0 100 4.9	B 0	36 3.7 37 3.8	6 0 7 2.9	6 6.1 7 0.7	B 4.9 Q622	61 0	18 0 19 0	21 1.2 22 2.5	6 0.2 7 0	3 0 4 3.3	6 0 7 2.4	29 1.4 30 0	6 0 7 0	103 0 104 0.6	22 0	3 0	1 6.1	6 1.2 7 5.8
8 4.5 9 0	4 2.4 5 2.5	IC103 1 2.1	Q433 E 0.1	38 3.8 39 0	8 3.3 9 3.3	8 6.1 9 6.1	E 0 C 4.9	63 0 64 1.9	20 1.8 21 0	23 0.6 24 0.6	8 0.4 9 0	1 3.0	8 0 9 3.3	31 0	8 0 9 0	105 0 106 3.3	24 1.2 25 1.3	4 18.2 5 0	2 6.1 3 6.1	8 1.1 IC9602
10 4.5 11 4.5	6 0	2 0	C 0 B 0	40 3.7 41 3.8	10 0	10 6.1 11 0.5	B 0	65 3.3 66 0	22 2.2 23 5.0	25 1.7 26 1.6	10 0 11 0	2 0	10 0	[P.2-45 - P.2-46]	10 0	107 0 108 0.6	26 1.5 27 3.3	6 1.2 7 0.6	4 0 5 6.1	1 9.4 2 23.9
12 0	8 2.4	4 0	Q434	42 2.6	12 1.6	12 0	E 2.5	67 3.3	24 0	27 1.8	12 0	4 0	12 0	MODE PIN NO. DC (V)	12 3.3	109 0.4	28 0	Q9001	6 6.1	3 4.9
13 4.5 14 4.5	10 2.4	5 0 6 0	E 0	43 3.8 44 0	13 1.6 14 1.8	13 1.0 14 6.2	C 2.4 B 1.8	68 0 69 0	1 1.6	28 0 29 0.7	13 0 14 0	5 3.3 6 0	13 0 14 0	1 8.2	13 0 14 0	110 0.2 111 2.5	29 0 30 1.5	E 0	7 6.1 8 12.0	4 0 5 1.2
15 4.5 16 4.5		1 0	B -0.1 Q435	1 9.1	15 0 16 0	15 4.8 16 4.2	Q752 E 0	70 1.1	3 0	30 0.6 31 0.6	15 0 16 0	7 0 8 0	15 0 16 0	3 3.2	15 0.1 16 0	112 0.4 113 0.3	31 0 32 0.2	B 0.7 Q9503	1 -8.7	6 0.2 7 3.1
17 4.4 18 9.0	-	3 9.0	E 0	2 0 3 8.1	17 0 18 0	17 4.6 18 4.5	C 0 B 2.4	72 1.1 73 1.3	4 5.1 5 3.3	32 0.5 33 0.7	17 0 18 0.2	9 0	17 0 18 0	4 0 5 0	17 0 18 0	114 0.3 115 0.2	33 0 34 0	E 0	3 0	8 1.0 IC9603
19 4.5 20 4.5		4 2.5 5 -0.1	B 0 Q436	IC381	19 0 20 0	19 0 20 12.1		74 1.1 75 1.4	Q6202 E 3.2	34 0.7 35 2.5	19 0.2 20 0.2	11 3.2 12 3.2	19 0 20 0	6 0.1	19 0 20 0	116 2.5 117 0	35 36 0	B 0.7 Q9505	4 -15.2 5 0	1 0 2 4.5
21 0	17 2.4	6 9.0	E 0 C 0	2 4.6	21 0	21 0	[P.2-17 - P.2-18] MODE DC (V)	76 0	C 0	36 0.7	21 0.2	13 0	21 0	8 0.1	21 2.5	118 0	37 3.3	E 0	6 0	3 3.4
22 4.5 23 4.5	19 2.4	1 2.9	B 0	3 4.5 4 0.5	22 0	23 4.8	IC902	77 3.3 78 0	B 2.6 Q6203	38 0	23 0.3	Q7201	22 0	1 3.3	22 0	119 2.5 120 0	38 1.2 39 0	C 0 B 0.7	8 14.2	5 0
24 0 25 4.5	20 0 21 2.4	2 2.9 3 9.0	Q437 E 0	5 4.8 6 5.0	24 0 25 0	24 0 25 0	1 4.9 2 0	79 1.9 80 0	E 0	39 0 40 0	24 0.3 25 0.2	E 0 C 1.5	24 2.4 25 1.6	2 0 3 2.5	24 0.5 25 0	121 0.8 122 0	40 0 41 0	1 24.0	1 -8.7	6 0 7 0
26 4.5 27 0	22 0 23 0	4 1.6 5 0	C 0 B 0	7 4.8 8 0	26 0 27 0	26 4.0 27 5.0	3 3.2	81 0 82 0	B 1.8 Q6204	41 0	26 3.2 27 0	B 0	26 3.3 27 0	1 6.0	26 2.7 27 1.4	123 2.5 124 2.5	42 0	2 24.0 3 24.0	3 0.4	8 0 IC9701
28 4.5 29 4.5		6 9.0 IC541	Q438 E 0	9 0	28 0 29 0	28 5.1 29 6.1	<digital pwb=""> [P.2-19 - P.2-20]</digital>	83 0 84 0	E 3.0 C 0	43 0 44 0	28 3.3 29 0.3	[P.2-37 - P.2-38] MODE P.C. (v)	28 0 29 0	2 14.2 3 1.1	28 0 29 0	125 2.4 126 2.4	44 0.1 45 0.7	4 0 5 23.9	4 0.4 5 14.8	1 8.3 2 14.2
30 9.0 31 4.6	26 0	1 0	C 0 B 0	11 0 12 0	30 0 31 0	30 6.1 31 6.1	MODE PIN NO. DC (V)	85 0 86 0	B 2.2 Q6205	45 0.6 46 0	30 0.4 31 0.2	PIN NO. DC (V)	30 2.3 31 1.2	4 0.1 5 0.9	30 0.7 31 0	127 0.6 128 0	46 0 47 1.5	6 0	6 12.0 7 0	3 3.3 4 0
32 4.5	28 3.2	3 2.7	Q439 E 0	13 0 14 0	32 0	32 6.1	1 0	87 0	E 3.0	47 0.7 48 0.7	32 0.5	1 0 2 3.2	32 3.0 33 0	6 0.1	32 3.3	IC7302	48 0.7 49 3.3	8 0	8 -15.3 9 -2.4	5 1.2 6 1.5
33 4.5 34 4.5	30 0	5 2.8	C 0	15 0	33 3.3 34 3.3	34 6.1	3 0	88 0 89 3.3	B 2.2	49 0.7	34 0.3	3 3.2	34 3.3	7 3.2 8 0.9	34 0	2 3.0	50 0.3	9 0	10 -15.2	7 6.3
35 4.5 36 4.5		6 0 Q106	B 0 Q440	16 0 Q3001	35 3.3 36 0	35 6.1 36 6.1	4 4.8 5 0	90 0 91 0	Q6206 E 3.2	50 0.7 51 0.6	35 0.1 36 0.2	4 3.2 5 3.3	35 0 36 0	IC9301 1 1.1	35 1.5 36 1.1	3 0.6 4 0.6	51 0 52 0	<led pwb=""></led>	11 0 12 12.0	8 0 IC9751
37 1.3 38 1.9		S 3.3 D 3.1	1 0	E 0 C 9.0	37 3.3 38 0	37 6.1 38 6.1	6 0	92 0 93 2.6	C 0 B 2.5	52 0 53 1.8	37 3.3 38 0.2	6 3.3 7 0	37 1.3 38 1.2	3 0	37 0 38 0.7	5 0 6 0	53 0.3 54 0	[P.2-53 - P.2-54] MODE DC (V)	13 14.9 14 0.4	1 2.6
39 1.4 40 1.8	1 — —	G 4.5 Q107	3 0 4 0	B 2.5 Q3502	39 0 40 0	39 6.1 40 6.1	[P.2-25 - P.2-26]	94 0.6 95 0.7	Q6211 E 1.3	54 1.2 55 1.2	39 0.3 40 0	9 0	39 1.3 40 1.2	4 0.2 5 3.3	39 3.0 40 2.4	7 0 8 0	1 0	IC8752	15 -3.7 16 -9.0	3 0 4 1.3
41 0 42 2.0	37 0	S 3.3 D 3.0	5 0.7 6 8.8	E 2.1 C 9.0	41 0.1 42 3.3	41 6.1 42 6.1	PIN NO. DC (V)	96 0.7 97 1.0	C 4.7 B 0.4	56 0.6 57 0.6	41 0.1 42 0.2	10 3.2 11 0	41 1.2 42 1.3	6 0	41 0 42 3.3	9 0	2 0	1 2.9 2 4.9	17 -8.7 Q6611	5 0
43 1.5 44 5.0	39 1.3	G 4.4 Q109	Q441 E 0	B 2.8 Q3503	43 0 44 0	43 6.1 44 6.1	1 0	98 0 99 3.3	Q6212 E 1.6	58 1.2 59 2.5	43 0.1 44 0.2	12 3.2 13 3.2	43 2.5 44 3.3	8 3.3 Q9501	43 1.4 44 2.4	11 0 12 3.3	4 0	3 0 Q8701	E 0	7 0
45 0	41 1.4	E 2.6	C 0	E 0	45 0	45 6.1	3 0	100 0	C 4.9	60 1.2	45 0.1	14 3.3	45 1.2	E 0	45 3.3	13 0	6 0	E 0	B 0	IC9851
46 0 47 0	42 2.2 43 1.4	C 0 B 1.8	B 8.8 Q442	C 4.9 B 0	46 0 47 0	46 6.1 47 6.1	5 0	101 0 102 0	B 2.0 Q6213	61 1.2 62 1.2	46 0 47 3.3	16 3.3	46 1.3 47 1.2	C 0 B 3.2	46 3.3 47 3.3	14 0 15 0	8 0	B 0	Q6612 E 0	1 14.2
48 5.0 49 1.9	45 0	Q110 E 2.1	E 0	TU3002 1 31.0	48 0 49 0	48 6.2 IC606	6 0 7 0.5	103 0 104 0	E 1.6 C 5.1	63 1.2 64 1.2	48 0.5 IC7203	1 3.3	48 1.2 49 0	Q9502 E 0	48 0 49 0	16 0 17 0	9 0	Q8704 E 4.9	C 0 B 0	3 0 IC9901
50 0 51 4.5	1 10 110	C 0 B 0	B 3.3 Q443	3 0	50 0 51 0	2 4.7	9 0	105 0 106 0	B 2.3 Q6214	65 2.4 66 0	1 3.3 2 0.8	3 2.0	50 0.6 51 0.7	C 0 B 0.6	50 3.3 51 0.8	18 0.2 19 2.9	11 0 12 3.2	C 0.1 B 4.9	Q6613 E 0	1 14.2 2 9.1
52 4.6 53 4.8	1 — —	Q111 E 2.2	E 0	5 0	52 0 53 0	3 4.7 4 0	10 0	107 0 108 0	E 1.3 C 5.0	67 2.5 68 1.3	3 0.9 4 0	5 0	52 0.4 53 0	Q9503 E 0	52 0 53 3.3	20 0	13 0 14 3.3	Q8705 E 2.4	C -0.1 B 0	3 11.8 4 2.5
54 4.8 55 2.6	1 ——	C 0 B 1.4	B 4.9 Q444	6 0	54 0 55 1.5	5 4.9 6 0	12 0.2 13 0.1	109 1.9 110 0	B 2.0 Q6250	69 1.3 70 0	5 0.7 6 0.9	6 0 IC7038	54 1.2 55 1.2	C 0 B 0.2	54 0.1 55 0	22 0 23 1.6	15 0 16 3.3	C 0 B 0	Q6661 E 14.9	5 0 Q9601
56 4.8 57 2.5	52 2.0	Q112 E 1.8	E 4.4 C 4.8	8 -	56 1.5 57 1.4	7 0	14 0.6 15 0	111 3.3 112 2.3	E 2.0 C 5.0	71 1.2 72 1.3	7 3.2 8 0.7	1 3.3	56 0 Q6501		56 1.7 57 0.2	24 1.2 25 0	IC7305 1 4.8	Q8709 E	C -15.2 B 14.8	E 0
58 4.9	54 2.9	C 0	B 0	10 -	58 0.7	9 5.0	16 0	113 1.0	B 2.0	73 2.5	9 1.0	3 3.3	E 0	[P.2-47 - P.2-48] MODE DC (V)	58 1.1	26 3.3	2 4.8	C 0	Q6662	B 0.6
59 2.1 60 2.5	55 2.5 56 2.4	B 1.0 Q113	E 0	11 -	59 0.7 60 0	11 0	17 0 18 0	114 1.0 115 0.9	Q6251 E 2.2	74 1.2 75 1.2	11 1.8	5 3.3	C 5.0 B 0	IC7602	59 0 60 0	28 3.3	4 4.8	Q8712	E -15.2 C 0.4	Q9651 E 0
61 5.0 62 2.5	58 0	E 2.2 C 5.0	C 4.6 B 0	13 0 14 0	61 0 62 1.5	12 0 13 5.0	19 0.5 20 0	116 1.0 117 0.9	C 5.0 B 2.1	76 0 77 1.2	12 0.7 13 3.2	6 3.3 Q7030	1 0		61 3.3 62 0	29 0 30 0	5 3.3 6 2.5	E 0 C 0.1	B -15.1 Q6663	C 0 B 0.6
63 0.3 64 2.1		B 2.9 Q281	[P.2-11 - P.2-12]	15 0 16 0.1	63 0.1 64 0.7	14 0 15 0	21 0 22 2.0	118 1.1 119 1.3	[P.2-29 - P.2-30]	78 1.2 79 2.5	14 3.1 15 3.1	E 0	3 0		63 0 64 0.7	31 1.4 32 0.3	7 0 8 0	B 3.2 Q8713	E 0 C 14.8	1 2.6
65 4.8 66 2.5		E 8.9 C -0.5	MODE PIN NO. DC (V)	17 2.3 18 0	1C552 1 5.0	16 5.0 IC661	23 0 24 2.0	120 0 121 1.5	MODE PIN NO. DC (V)	80 1.2 81 1.3	16 3.1 17 3.2	B 0.9 Q7032	4 0 5 0		65 0 66 0	33 2.2 34 0.8	1 0	E 0	B 0	2 30.9 3 11.9
67 4.8 68 2.5	63 5.0	B 0 CN0UA	1 5.0	[D040 D044]	2 0 3 1.2	1 0 2 1.2	25 0 26 0.9	122 1.5 123 0	1 0.7	82 0 83 1.2	18 0.4 19 1.2	E 3.3 C 3.2	6 0 7 0	7 0	67 0 68 0	35 0.2 36 1.5	2 3.3 3 0	В 3.3		4 0 5 0
69 0.2 70 2.2	65 2.5	1 0	2 1.5 3 1.5	[P.2-13 - P.2-14] MODE PIN NO. DC (V)	4 1.5 5 3.3	3 1.2	27 0 28 2.0	124 3.3 125 0	2 0.8	84 1.2 85 0	20 0.7 21 0.5	B 0 Q7033	8 3.4 9 0		69 3.3 70 0	37 3.3 38 0	4 3.3 Q7301			6 5.1 7 0
71 4.8	67 2.5	3 0	4 0 5 2.3	IC501	Q501	5 3.3	29 3.3	126 0	4 0	86 2.4	22 1.1	E 0	10 0	2 1.5	71 0	39 0.8	E 0			, , ,
72 2.5 73 4.8	69 2.5	CN0UV 0	6 0	2 0	E 5.3 C 12.0	6 3.3 7 3.2	31 1.8	127 2.9 128 2.9	5 3.2 IC6724	87 0 88 0	23 1.2 24 1.2	C 3.2 B 0	11 2.1 12 0		73 3.3	40 0.5 41 -0.2	C 0 B 0			
74 0.1 75 1.2	71 4.9	3 0	7 0.3 8 0.1	3 0 4 0	B 5.9 Q502	8 3.2 9 1.4	32 0 33 2.5	1 1.6	1 0 2 3.3	89 0 90 0	25 3.3 26 0	Q7034 E 3.3	1 4.9	5 0 6 5.0	74 3.3 75 3.3	42 1.0 43 1.5	1 3.3			
76 0.1 77 2.1		4 1.4 5 0.1	9 0	5 0 6 0	E 5.3 C 12.1	10 1.4 11 3.2	34 0 35 3.3	3 0	3 0 4 3.3	91 0 92 0	27 1.2 28 0	C 0 B 0	2 4.9 3 4.9		76 2.9 77 -0.5	44 0.6 45 0.2	3 0			
78 0 79 2.8		6 1.2 7 0.1	11 5.0 12 4.7	7 0 8 0.1	B 5.9 Q503	12 0.1 13 1.6	36 0 37 0	4 5.0 5 3.3	[P.2-33 - P.2-34]	93 0 94 1.2	29 1.2 30 1.1	Q7035 E 3.3	4 4.9 5 5.0		78 0 79 0	46 0.1 47 3.3	4 3.3 5 3.4			
80 0 81 2.3	76 0	8 1.5 9 0	13 4.5 14 0	1C502 1 0	E 0 C 3.2	14 1.6 15 1.2	38 3.3 39 1.6		MODE PIN NO. DC (V)	95 2.5 96 2.5	31 1.2 32 0	C 0 B 0	6 0 7 0		80 0 81 0	48 0 IC7303				
82 0	78 0	10 1.3	15 0.4 16 0.4	2 0	B 0 Q553	16 1.2 IC751	40 0 41 0	MODE PIN NO. DC (V)		97 1.2	33 0		8 0		82 0.1 83 0	1 3.2				
84 0	80 0	12 2.1	17 0.3	4 0	E 0	1 0	42 1.9	IC6001 -	2 2.5	99 0	35 1.5		10 0		84 0	3 3.3				
85 0 86 4.8	82 0.5	13 0	18 0.3 19 5.0	5 0 6 0	C 3.3 B 0	3 2.0	43 0 44 3.3	1 0	3 1.2 4 1.2	100 1.2 IC6102	36 0.5 37 0		11 0 12 1.2		85 3.3 86 0	4 3.0 5 1.9				
87 2.5 88 2.0	84 0		20 0 21 0.4	7 -0.1 8 0		4 0.1 5 0	45 0 46 3.3	2 5.0 3 2.0	5 0 6 1.3	1 0	38 3.3 39 0		13 1.3 14 0		87 2.5 88 3.3	6 0 7 0.1				
89 1.1 90 0	85 0		22 5.0 23 0	9 0		6 -0.1 7 1.9	47 0 48 0	4 0 5 2.0	7 1.5 8 2.5	3 1.2 4 1.2	40 0 41 0		15 0 16 1.2		89 3.3 90 0	8 0.1 9 3.3				
91 2.5 92 2.8	87 0		24 0 25 0	11 0 12 0		8 4.9 Q609	49 3.0 50 1.9	6 0 7 0	9 1.2 10 1.2	5 2.5 6 2.4	42 0 43 0		17 1.2 18 0		91 3.3 92 0	10 0.9 11 0.9				
93 2.5 94 0.2	89 0		26 2.0 27 2.1	13 0 14 0		E 0 C 5.0	51 0 52 1.9	8 0 9 5.1	11 0 12 1.2	7 2.5 8 1.2	44 3.3 45 0		19 0 20 1.0		93 0 94 0	12 0 13 0.6				
95 2.1	91 0		28 0	15 0		B 0	53 0	10 2.3	13 1.2 14 2.5	0 1.2	46 0		21 1.2		95 0	14 3.3				
96 4.8	92 0		29 0	16 0		Q614	54 3.3	11 0.1		A 0.7.7\0 .7.0	47 0	0.74/N= \/	22 0		96 0	15 0				

(No.YA377)2-73

2-74(No.YA377)

WAVEFORMS


















































Victor Company of Japan, Limited Flat Panel Display Category 12, 3-chome, Moriya-cho, kanagawa-ku, Yokohama-city, kanagawa-prefecture, 221-8528, Japan

PARTS LIST

CAUTION

- The parts identified by the △ symbol are important for the safety . Whenever replacing these parts, be sure to use specified ones to secure the safety.
- The parts not indicated in this Parts List and those which are filled with lines --- in the Parts No. columns will not be supplied.
- P.W. BOARD Ass'y will not be supplied, but those which are filled with the Parts No. in the Parts No. columns will be supplied.

ABBREVIATIONS OF RESISTORS, CAPACITORS AND TOLERANCES

	RESISTORS		CAPACITORS
CR	Carbon Resistor	C CAP.	Ceramic Capacitor
FR	Fusible Resistor	E CAP.	Electrolytic Capacitor
PR	Plate Resistor	M CAP.	Mylar Capacitor
VR	Variable Resistor	CH CAP.	Chip Capacitor
HV R	High Voltage Resistor	HV CAP.	High Voltage Capacitor
MF R	Metal Film Resistor	MF CAP.	Metalized Film Capacitor
MG R	Metal Glazed Resistor	MM CAP.	Metalized Mylar Capacitor
MP R	Metal Plate Resistor	MP CAP.	Metalized Polystyrol Capacitor
OM R	Metal Oxide Film Resistor	PP CAP.	Polypropylene Capacitor
CMF R	Coating Metal Film Resistor	PS CAP.	Polystyrol Capacitor
UNF R	Non-Flammable Resistor	TF CAP.	Thin Film Capacitor
CH V R	Chip Variable Resistor	MPP CAP.	Metalized Polypropylene Capacitor
CH MG R	Chip Metal Glazed Resistor	TAN. CAP.	Tantalum Capacitor
COMP. R	Composition Resistor	CH C CAP.	Chip Ceramic Capacitor
LPTC R	Linear Positive Temperature Coefficient Resistor	BP E CAP.	Bi-Polar Electrolytic Capacitor
		CH AL E CAP.	Chip Aluminum Electrolytic Capacitor
		CH AL BP CAP.	Chip Aluminum Bi-Polar Capacitor
		CH TAN. E CAP.	Chip Tantalum Electrolytic Capacitor
		CH AL BP E CAP.	Chip Tantalum Bi-Polar Electrolytic Capacitor

					RESIS	STORS				
Ī	F	G	J	К	M	N	R	Н	Z	Р
	±1%	±2%	±5%	±10%	±20%	±30%	+30% -10%	+50% -10%	+80% -20%	+100% -0%

CONTENTS

USING P.W. BOARD & REMOTE CONTROL UNIT	
EXPLODED VIEW PARTS LIST -1	
EXPLODED VIEW -1	
EXPLODED VIEW PARTS LIST -2	
EXPLODED VIEW -2	3-7
PRINTED WIRING BOARD PARTS LIST [LT-26DX7BJ, LT-26DX7SJ]	
ANALOG P.W. BOARD ASS'Y (SFL-1241A-U2)	
D-AMP P.W. BOARD ASS'Y (SFL-6221A-U2)	
SW P.W. BOARD ASS'Y (SFL-7206A-U2)	
LED P.W. BOARD ASS'Y (SFL-8703A-U2)	
POWER P.W. BOARD ASS'Y (SFL-9043A-U2)	
DC-DC P.W. BOARD ASS'Y (SFL-9143A-U2)	
DIGITAL P.W. BOARD ASS'Y (SFL0D254A-U2)	3-15
PRINTED WIRING BOARD PARTS LIST [LT-26DX7BJ/P, LT-26DX7SJ/P]	3-21
ANALOG P.W. BOARD ASS'Y (SFL-1241A-U2)	3-21
D-AMP P.W. BOARD ASS'Y (SFL-6221A-U2)	3-21
SW P.W. BOARD ASS'Y (SFL-7206A-U2)	3-21
LED P.W. BOARD ASS'Y (SFL-8703A-U2)	3-21
POWER P.W. BOARD ASS'Y (SFL-9043A-U2)	
DC-DC P.W. BOARD ASS'Y (SFL-9143A-U2)	
DIGITAL P.W. BOARD ASS'Y (LCA10599-59C) (SFL-0D254A)	3-21
PRINTED WIRING BOARD PARTS LIST [LT-26X70BU, LT-26X70SU]	3-27
ANALOG P.W. BOARD ASS'Y (SFL-1242A-U2)	3-27
D-AMP P.W. BOARD ASS'Y (SFL-6221A-U2)	3-31
SW P.W. BOARD ASS'Y (SFL-7206A-U2)	3-31
LED P.W. BOARD ASS'Y (SFL-8710A-U2)	3-31
POWER P.W. BOARD ASS'Y (SFL-9043A-U2)	3-31
DC-DC P.W. BOARD ASS'Y (SFL-9144A-U2)	3-31
DIGITAL P.W. BOARD ASS'Y (SFL0D258A-Ú2)	
PRINTED WIRING BOARD PARTS LIST [LT-26X70BU/P, LT-26X70SU/P]	3-38
ANALOG P.W. BOARD ASS'Y (SFL-1242A-U2)	
D-AMP P.W. BOARD ASS'Y (SFL-6221A-U2)	3-38
SW P.W. BOARD ASS'Y (SFL-7206A-U2)	3-38
LED P.W. BOARD ASS'Y (SFL-8710A-U2)	3-38
POWER P.W. BOARD ASS'Y (SFL-9043A-U2)	3-38
DC-DC P.W. BOARD ASS'Y (SFL-9144A-U2)	3-38
DIGITAL P.W. BOARD ASS'Y (LCA10599-63C) (SFL-0D258A)	3-38
PRINTED WIRING BOARD PARTS LIST [LT-32DX7BJ, LT-32DX7SJ]	3-44
ANALOG P.W. BOARD ASS'Y (SFL-1241A-U2)	
D-AMP P.W. BOARD ASS'Y (SFL-6221A-U2)	
SW P.W. BOARD ASS'Y (SFL-7206A-U2)	
LED P.W. BOARD ASS'Y (SFL-8703A-U2)	3-44
POWER P.W. BOARD ASS'Y (SFL-9043A-U2)	3-44
DC-DC P.W. BOARD ASS'Y (SFL-9143A-U2)	3-44
DIGITAL P.W. ROARD ASSIY (SEL0D253A-LI2)	3_44

PRINTED WIRING BOARD PARTS LIST [LT-32DX7BJ/P, LT-32DX7SJ/P]	3-50
ANALOG P.W. BOARD ASS'Y (SFL-1241A-U2)	
D-AMP P.W. BOARD ASS'Y (SFL-6221A-U2)	3-50
SW P.W. BOARD ASS'Y (SFL-7206A-U2)	3-50
LED P.W. BOARD ASS'Y (SFL-8703A-U2)	3-50
POWER P.W. BOARD ASS'Y (SFL-9043A-U2)	
DC-DC P.W. BOARD ASS'Y (SFL-9143A-U2)	3-50
DIGITAL P.W. BOARD ASS'Y (LCA10599-58C) (SFL-0D253A)	3-50
PRINTED WIRING BOARD PARTS LIST [LT-32X70BU, LT-32X70SU]	
ANALOG P.W. BOARD ASS'Y (SFL-1242A-U2)	3-56
D-AMP P.W. BOARD ASS'Y (SFL-6221A-U2)	3-56
SW P.W. BOARD ASS'Y (SFL-7206A-U2)	
LED P.W. BOARD ASS'Y (SFL-8710A-U2)	
POWER P.W. BOARD ASS'Y (SFL-9043A-U2)	
DC-DC P.W. BOARD ASS'Y (SFL-9144A-U2)	3-56
DIGITAL P.W. BOARD ASS'Y (SFL0D257A-U2)	3-56
PRINTED WIRING BOARD PARTS LIST [LT-32X70BU/P, LT-32X70SU/P]	
ANALOG P.W. BOARD ASS'Y (SFL-1242A-U2)	3-62
D-AMP P.W. BOARD ASS'Y (SFL-6221A-U2)	
SW P.W. BOARD ASS'Y (SFL-7206A-U2)	
LED P.W. BOARD ASS'Y (SFL-8710A-U2)	3-62
POWER P.W. BOARD ASS'Y (SFL-9043A-U2)	3-62
DC-DC P.W. BOARD ASS'Y (SFL-9144A-U2)	3-62
DIGITAL P.W. BOARD ASS'Y (LCA10599-62C) (SFL-0D257A)	3-62
REMOTE CONTROL UNIT PARTS LIST (RM-C1900S-1C) (RM-C1905S-1C)	3-67
PACKING PARTS LIST [26 INCH MODELS]	
PACKING	
PACKING PARTS LIST [32 INCH MODELS]	3-70
PACKING	3_71

USING P.W. BOARD & REMOTE CONTROL UNIT


P.W.B ASS'Y	P.W.B ASS'Y No.										
P.W.B A33 1	LT-26DX7BJ	LT-26DX7SJ	LT-26DX7BJ/P	LT-26DX7SJ/P	LT-26X70BU	LT-26X70SU	LT-26X70BU/P	LT-26X70SU/P			
ANALOG P.W.B	SFL-1241A-U2	←	←	←	SFL-1242A-U2	←	←	←			
D-AMP P.W.B	SFL-6221A-U2	←	←	←	←	←	←	←			
SW P.W.B	SFL-7206A-U2	←	←	←	←	←	←	←			
LED P.W.B	SFL-8703A-U2	←	←	←	SFL-8710A-U2	←	←	←			
POWER P.W.B	SFL-9043A-U2	←	←	←	←	←	←	←			
DC-DC P.W.B	SFL-9143A-U2	←	←	←	SFL-9144A-U2	←	←	←			
DIGITAL P.W.B	SFL0D254A-U2	←	LCA10599-59C (SFL-0D254A)	←	SFL0D258A-U2	←	LCA10599-63C (SFL-0D258A)	←			
REMOTE CONTROL UNIT	RM-C1905S-1C	←	←	←	RM-C1900S-1C	←	←	←			

P.W.B ASS'Y	P.W.B ASS'Y No.										
P.W.D A33 Y	LT-32DX7BJ	LT-32DX7SJ	LT-32DX7BJ/P	LT-32DX7SJ/P	LT-32X70BU	LT-32X70SU	LT-32X70BU/P	LT-32X70SU/P			
ANALOG P.W.B	SFL-1241A-U2	←	←	←	SFL-1242A-U2	←	←	←			
D-AMP P.W.B	SFL-6221A-U2	←	←	←	←	←	←	←			
SW P.W.B	SFL-7206A-U2	←	←	←	←	←	←	←			
LED P.W.B	SFL-8703A-U2	←	←	←	SFL-8710A-U2	←	←	←			
POWER P.W.B	SFL-9043A-U2	←	←	←	←	←	←	←			
DC-DC P.W.B	SFL-9143A-U2	←	←	←	SFL-9144A-U2	←	←	←			
DIGITAL P.W.B	SFL0D253A-U2	←	LCA10599-58C (SFL-0D253A)	←	SFL0D257A-U2	←	LCA10599-62C (SFL-0D257A)	←			
REMOTE CONTROL UNIT	RM-C1905S-1C	←	←	←	RM-C1900S-1C	←	←	←			

EXPLODED VIEW PARTS LIST -1

⚠Ref.No.	Part No.	Part Name	Description	Local
101 101 102	LC12645-001A-U LC12650-001A-U LC33411-004B	JACK COVER JACK COVER OPERATION SHEET		LT-26DX7BJ,LT-26DX7BJP,LT-26DX7SJLT-26DX7SJP,LT-26X70BU,LT-26X70BUP,LT-26X70SU,LT-26X70SUP LT-32DX7BJ,LT-32DX7BJP,LT-32DX7SJ,LT-32DX7SJP,LT-32X70BU,LT-32X70BUP,LT-32X70SU,LT-32X70SUP LT-26DX7BJ,LT-26DX7BJP,LT-26DX7SJ,LT-26DX7SJP,LT-32DX7BJ,LT-32DX7BJP,LT-32DX7SJ,LT-32DX7SJP
103 103A	LC42528-001A-C T0164-01	STAND BASE UNIT CORD COVER	Inc.103A	
104 104A	LC42530-001A-C M04R-PPBF-C3-14	SUPPORT UNIT SCREW	Inc.104A (x4)	
105 106 106 106 107 108	QYSPSPD5014MA LC12643-001A-U LC12644-001A-U LC12649-001A-U QYSBSFG4016MA LC42446-002A	SCREW REAR COVER REAR COVER REAR COVER TAP SCREW SCREW	M5 x 14mm(x4) M4 x 16mm(x7)	LT-26DX7BJ,LT-26DX7BJP,LT-26DX7SJ,LT-26DX7SJP LT-26X70BU,LT-26X70BUP,LT-26X70SU,LT-26X70SUP LT-32DX7BJ,LT-32DX7BJP,LT-32DX7SJ,LT-32DX7SJP,LT-32X70BUP,LT-32X70BUP,LT-32X70SUP
109 110 111 112 113 114 115	QYSBSF3010MA QAU0420-002 QUQL05-5009AA-E QUQL05-4009AA-E QQR0490-001 LC42446-001A LC42340-001B-HK	TAP SCREW DIGITAL TUNER UNIT FFC WIRE FFC WIRE NOISE FILTER SCREW SERVICE COVER	M3 x 10mm(x5) ANALOG CN001-DIGITAL CN001 ANALOG CN002-DIGITAL CN002 (x2)	LT-26DX7BJ,LT-26DX7BJP,LT-26DX7SJ,LT-26DX7SJP,LT-32DX7BJ,LT-32DX7BJP,LT-32DX7SJ,LT-32DX7SJP
116 117 118 119 119 120 ∱121	LC42446-001A QYSPSP3008ZA QNB0036-001 LC12497-004A-HK LC12497-005A-HK QQR0490-001 LC12507-005B-0K	SCREW SCREW RETAINER SHIELD TERMINAL SHIELD TERMINAL NOISE FILTER TUNER BASE	M3 x 8mm(x2) (x2)	LT-26DX7BJLT-26DX7BJPLT-26DX7SJLT-26DX7SJPLT-32DX7BJLT-32DX7BJPLT-32DX7SJLT-32DX7SJP LT-26DX7BJLT-26DX7BJPLT-26DX7SJLT-26DX7SJPLT-32DX7BJPLT-32DX7BJPLT-32DX7SJP LT-26X70BU_LT-26X70BUP_LT-26X70SU_LT-26X70SUP_LT-32X70BUP_LT-32X70SUP_LT-32X70SUP LT-26DX7BJ_LT-26DX7BJP_LT-26DX7SJLT-32DX7BJPLT-32DX7BJPLT-32DX7SJP
▲121 ▲122 123 124 ▲125 ▲125 126	LC12507-006B-0K LC12506-005B-0K LC42446-002A QYSBSF3010MA QMPN370-170-JC QMPK450-170-JC QQR0491-001	TUNER BASE TERMINAL BASE SCREW TAP SCREW POWER CORD(EK) POWER CORD(EU) CORE FILTER	(x2) M3 x 10mm(x3) 1.7m BLACK 1.7m BLACK	LT-26X70BU,LT-26X70BUP,LT-26X70SU,LT-26X70SUP,LT-32X70BU,LT-32X70BUP,LT-32X70SU,LT-32X70SUP LT-26DX7BJ,LT-26DX7BJP,LT-26DX7SJJ,LT-26DX7SJP,LT-32DX7BJ,LT-32DX7BJP,LT-32DX7SJP LT-26X70BU,LT-26X70BUP,LT-26X70SU,LT-26X70SUP,LT-32X70BU,LT-32X70BUP,LT-32X70SU,LT-32X70SUP
127 128 129 130	LC22007-003A-0K QYSPSPD4006ZA WJX0033-001A-E QNB0036-001	POWER CORD HOLDER SCREW E-COAXIAL ASSY RETAINER	M4 x 6mm(x2) (x2)	LT-26DX7BJ,LT-26DX7BJP,LT-26DX7SJ,LT-26DX7SJP,LT-32DX7BJ,LT-32DX7BJP,LT-32DX7SJ,LT-32DX7SJP
\$\Delta 201 \$\Delta 202 \$\Delta 203 \$\Delta 203 \$\Delta 204 \$\Delta 204 \$\Delta 205	SFL-6221A-U2 SFL0D254A-U2 LCA10599-59C SFL0D258A-U2 LCA10599-63C SFL0D253A-U2 LCA10599-58C SFL0D257A-U2 LCA10599-62C SFL-1241A-U2 SFL-1242A-U2 SFL-9143A-U2 SFL-9144A-U2 SFL-9043A-U2	D-AMP PWB DIGITAL PWB ANALOG PWB ANALOG PWB DC-DC PWB POWER PWB		LT-26DX7BJ,LT-26DX7SJ LT-26X70BU,LT-26X70SU LT-26X70BU,LT-26X70SU LT-26X70BU,LT-26X70SU LT-32DX7BJ,LT-32DX7SJ LT-32DX7BJ,LT-32DX7SJ LT-32X70BU,LT-32X70SU LT-32X70BU,LT-32X70SU LT-32X70BU,LT-32X70SU LT-32X70BU,LT-32X70SU LT-26X7BJ,LT-26DX7SJ,LT-26DX7SJ,LT-32DX7BJ,LT-32DX7BJ,LT-32DX7SJ,LT-32DX7SJ LT-26X7BJ,LT-26DX7BJ,LT-26DX7SJ,LT-26DX7SJ,LT-32DX7BJ,LT-32DX7BJ,LT-32DX7SJ,LT-32DX7SJ LT-26X70BU,LT-26X70BU,LT-26X70SU,LT-26X70SUP,LT-32X70BU,LT-32X70SU,LT-32X70SUP LT-26X70BU,LT-26X70BUP,LT-26X70SU,LT-26X70SUP,LT-32X70BUP,LT-32X70SU,LT-32X70SUP LT-26X70BU,LT-26X70BUP,LT-26X70SU,LT-26X70SUP,LT-32X70BUP,LT-32X70SUP,LT-32X70SUP LT-26X70BU,LT-26X70BUP,LT-26X70SU,LT-26X70SUP,LT-32X70BUP,LT-32X70SUP,LT-32X70SUP


EXPLODED VIEW -1

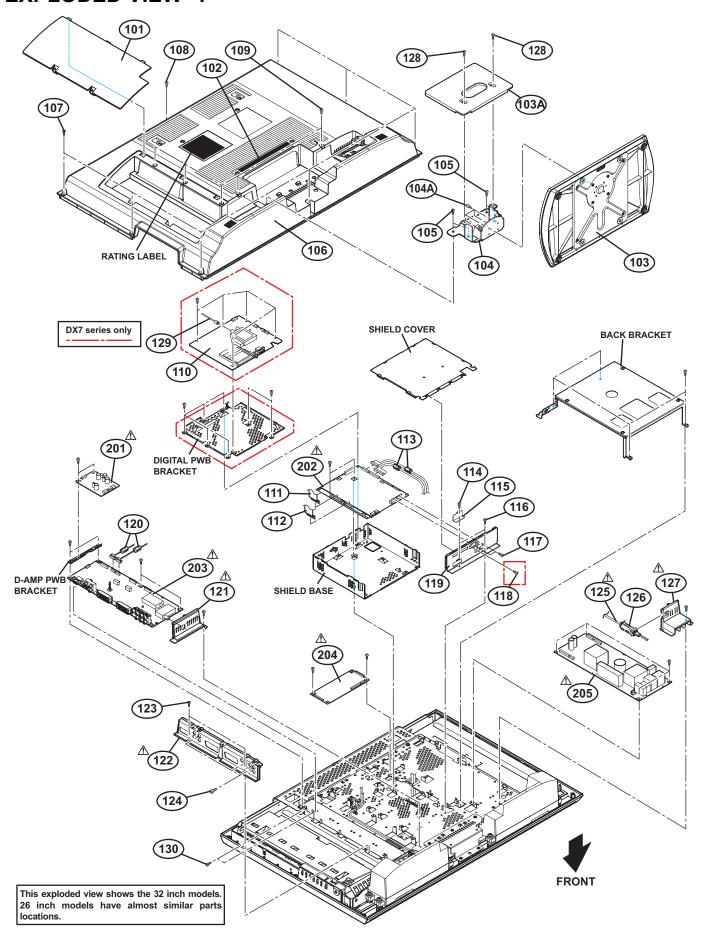

EXPLODED VIEW PARTS LIST -2

ΔRef.No.	Part No.	Part Name	Description	Local
▲ 151 ▲ 151 152 152 153 154 155 155 ▲ 156 ▲ 156	QLD0370-002-JUK QLD0422-001-JUK WJW0041-001A-E WJW0041-002A-E LC33407-001B-HK QQR0491-001 WJZ0190-001A-E WJZ0190-001A-E WJZ0190-002A-E LC12641-001A-U LC12641-003A-U LC12641-003A-U LC12646-001A-U LC12646-004A-U LC12646-004A-U LC12646-005A-U LC42434-001A-C LC40226-005A-H LC41458-002A LC42434-001A-C LC33404-001A-HK QQR0490-001	LCD PANEL UNIT LCD PANEL UNIT DIGITAL (LVDS) CABLE DIGITAL (LVDS) CABLE ILLUMINATE LENS CORE FILTER E-HARNESS ASSY E-HARNESS ASSY FRONT PANEL ASSY SPEAKER ASSY SPEAKER ASSY SPEAKER ASSY SPEAKER ASSY CONTROL ASSY NOISE FILTER	DIGITAL CN0LV1-LCD PANEL DIGITAL CN0LV1-LCD PANEL DIGITAL CN000W-LCD PANEL DIGITAL CN000W-LCD PANEL LEFT (x6) (x6) (x6) RIGHT	LT-26DX7BJ,LT-26DX7BJP,LT-26DX7SJ,LT-26DX7SJP,LT-26X70BU,LT-26X70BU,LT-26X70SU,LT-26X70SUP LT-32DX7BJ,LT-32DX7BJP,LT-32DX7SJ,LT-32DX7SJP,LT-26X70BU,LT-32X70SU,LT-32X70SUP LT-26DX7BJ,LT-26DX7BJP,LT-26DX7SJ,LT-26DX7SJ,LT-26X70BU,LT-26X70BU,LT-26X70SU,LT-26X70SUP LT-32DX7BJ,LT-32DX7BJ,LT-32DX7SJ,LT-32DX7SJP,LT-32X70BU,LT-32X70BUP,LT-32X70SU,LT-32X70SUP LT-32DX7BJ,LT-32DX7BJP,LT-32DX7SJ,LT-32DX7SJP,LT-32X70BU,LT-32X70BU,LT-32X70SU,LT-32X70SUP LT-26DX7BJ,LT-26DX7BJP,LT-32DX7SJ,LT-32DX7SJP,LT-26X70BU,LT-32X70BUP,LT-26X70SU,LT-26X70SUP LT-26DX7BJ,LT-32DX7BJP,LT-32DX7SJ,LT-32X70BU,LT-32X70BUP,LT-32X70SUP LT-26DX7BJ,LT-26DX7SJP LT-26X70BU,LT-26X70BUP LT-26X70BU,LT-26X70BUP LT-26X70SU,LT-32X70BUP LT-32X70BU,LT-32X70BUP
⚠206 №206 №207	SFL-8703A-U2 SFL-8710A-U2 SFL-7206A-U2	LED PWB LED PWB SW PWB		LT-26DX7BJ,LT-26DX7BJP,LT-26DX7SJ,LT-26DX7SJP,LT-32DX7BJ,LT-32DX7BJP,LT-32DX7SJ,LT-32DX7SJP LT-26X70BU,LT-26X70BUP,LT-26X70SU,LT-26X70SUP,LT-32X70BU,LT-32X70BUP,LT-32X70SU,LT-32X70SUP

EXPLODED VIEW -2

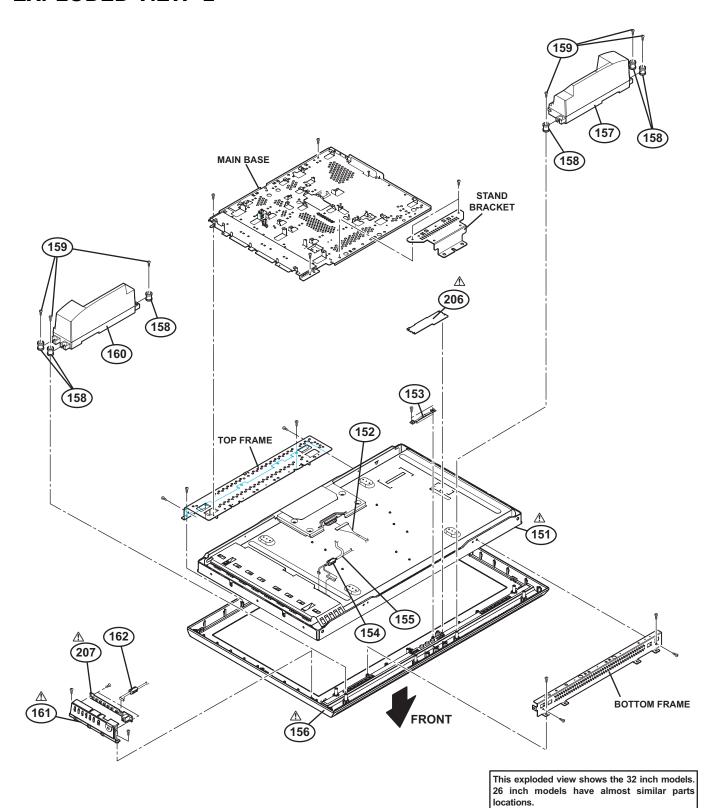

PRINTED WIRING BOARD PARTS LIST [LT-26DX7BJ, LT-26DX7SJ]

ANALO	OG P.W. BOARI	O ASS'Y (SFL-1241)	A-U2)	⚠Ref No.	Part No.	Part Name	Description Local
⚠Ref No. IC101 IC102 IC103 IC104 IC105 IC381 IC501 IC502 IC541 IC552 IC601 IC606 IC661 IC751 IC902 IC3501 IC902 IC3501	Part No. R2S11004FT R2S11003FT MM1510XN-X MM1510XN-X MM1510XN-X M62320FP-X HA17558AF-X AK4554VT-X SN74LC1G3157K-X JCC5067 PQ2L3152MS-X NJW1182FP1 M62320FP-X MX3000CS-X BH3547F-X BA33BC0FP-X MSP3415GQGB8V3I BA80BC0FP-X	Part Name IC	Description Local	D440 D441 D442 D443 D444 D445 D446 D446 D462 D463 D464 D465 D466 D467 D468 D469 D491 D492 D501	UDZ\$10B-X UDZ\$10B-X	Z DIODE C DIOD	Description Local
Q106 Q107 Q109 Q110 Q111 Q112 Q113 Q281 Q431 Q432	2SK1374-X 2SK1374-X 2SA1022/BC/-X 2SA1022/BC/-X 2SA1022/BC/-X 2SA1022/BC/-X 2SC1623A/5-6/-X UN2226-X UN2226-X	MOS FET MOS FET TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR SI TRANSISTOR SI TRANSISTOR DIGI TRANSISTOR DIGI TRANSISTOR		D501 D502 D503 D605 D606 D607 D608 D615 D621 D622 D751 D752	1S3355W-X MA8033-X 1S3355W-X 1S3355W-X 1S3355W-X 1S3355W-X 1S3355W-X 1S3355W-X 1S3355W-X 1S3355W-X 1S3355W-X 1S3355W-X	CHIP DIODE Z DIODE Z DIODE CHIP DIODE CHIP DIODE CHIP DIODE CHIP DIODE SI DIODE CHIP DIODE	
Q433 Q434 Q435 Q436 Q437 Q438 Q439 Q440 Q441 Q442 Q443 Q445 Q501 Q502 Q503 Q553 Q609 Q614 Q621 Q622 Q751 Q752 Q3001 Q3502 Q3503	UN2110-X UN2226-X UN2226-X UN2110-X UN2226-X UN2110-X UN2226-X UN2110-X UMX1N-W 2SA812A/5-6/-X UN2226-X UN2226-X UN2212-X 2SC1623A/5-6/-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC1623A/5-6/-X UN2226-X 2SC1623A/5-6/-X RT1N441C-X	DIGI TRANSISTOR SI TRANSISTOR DIGI TRANSISTOR DIGI TRANSISTOR DIGI TRANSISTOR SI TRANSISTOR DIGI TRANSISTOR SI TRANSISTOR DIGI TRANSISTOR DIGI TRANSISTOR DIGI TRANSISTOR		C106 C107 C108 C116 C117 C118 C119 C120 C121 C122 C123 C124 C125 C126 C127 C128 C129 C130 C131 C132 C133 C134 C134 C134 C136 C137 C138	NCB11CK-475X NCB31CK-104X NEHL1CM-476X NCB11AK-106X NCB11CK-105X NCB31CK-105X NCB31CK-105X NCB31CK-105X NCB31CK-105X NCB31CK-104X NCB31CK-104X NCB31CK-105X NCB31CK-105X NCB31CK-105X NCB31CK-105X NCB31CK-105X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-105X NCB31CK-105X NCB31CK-105X NCB31CK-105X NCB31CK-105X NCB31CK-105X NCB31CK-105X NCB31CK-105X NCB31CK-105X NCB31CK-105X NCB31CK-105X NCB31CK-105X NCB31CK-105X NCB31CK-105X NCB31CK-105X NCB31CK-105X NCB31CK-106X NCB31CK-106X NCB31CK-106X NCB31CK-106X NCB31CK-106X NCB31CK-106X NCB31CK-106X NCB31CK-106X NCB31CK-106X NCB31CK-106X	C CAPACITOR C CAPACITOR E CAPACITOR C CAPACITOR	4.7uF 16V K 0.1uF 16V K 47uF 16V M 10uF 10V K 0.1uF 16V K 1uF 16V K 1uF 16V K 1uF 16V K 0.1uF 16V K 1uF 16V K 0.1uF 16V K 0.1uF 16V K 0.1uF 16V K 0.1uF 16V K 1uF 16V K
D105 D281 D282 D283 D401 D402 D403 D404 D405 D406 D407 D408 D409 D411 D412 D413 D416 D420 D421 D422 D423 D422 D423 D424 D425 D427 D428 D427 D428 D427 D428	1SS355W-X 1SS355W-X 1SS355W-X 1SS355W-X 1SS355W-X UDZS10B-X	CHIP DIODE CHIP DIODE CHIP DIODE CHIP DIODE Z DIODE		C139 C141 C142 C143 C144 C145 C146 C147 C148 C149 C150 C151 C152 C153 C154 C155 C156 C157 C158 C161 C167 C168 C170 C171 C172 C173 C174 C177	NCB31CK-105X NEHL1CM-106X NCB31CK-104X NCB31CK-104X NCB31CK-105X NEHL1CM-106X NEHL1CM-106X NCB31CK-105X NEHL1CM-106X NCB31CK-105X NEHL1CM-106X NCB31CK-105X NEHL1CM-106X NCB31CK-105X NEHL1CM-106X NCB31CK-103X NCB31CK-104X NCB31CK-103X NCB31CK-104X NCB31CK-103X NCB31CK-104X NCB31CK-103X NCB31CK-104X NCB31CK-103X NCB31CK-104X NCB31CK-103X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X	C CAPACITOR E CAPACITOR C CAPACITOR C CAPACITOR C CAPACITOR C CAPACITOR E CAPACITOR C CAPACITOR C CAPACITOR E CAPACITOR C CAPACITOR	1uF 16V K 10uF 16V M 0.1uF 16V K 0.1uF 16V K 1uF 16V K 10uF 16V M 0.0uF 16V M 0.01uF 16V K

Ref No.	Part No.	Part Name	Description Local	Ref No.	Part No.	Part Name	Description Local
C178	NCB31CK-105X	C CAPACITOR	1uF 16V K	C468	NDC31HJ-101X	C CAPACITOR	100pF 50V J
C179	NEHL1CM-476X	E CAPACITOR	47uF 16V M	C469	NDC31HJ-101X	C CAPACITOR	100pF 50V J
C180	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C491	NEHL1CM-106X	E CAPACITOR	10uF 16V M
C181	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	C492	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C182	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	C493	NEHL1CM-107X	E CAPACITOR	100uF 16V M
C183	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	C494	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C184	NDC31HJ-151X	C CAPACITOR	150pF 50V J	C501	NCB31HK-223X	C CAPACITOR	0.022uF 50V K
C185	NDC31HJ-820X	C CAPACITOR	82pF 50V J	C502	NCB31HK-223X	C CAPACITOR	0.022uF 50V K
C187	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C503	NCB31HK-222X	C CAPACITOR	2200pF 50V K
C189	NEHL1CM-106X	E CAPACITOR	10uF 16V M	C504	NCB31HK-222X	C CAPACITOR	2200pF 50V K
C194	NCB11AK-106X	C CAPACITOR	10uF 10V K	C505	NCB31HK-822X	C CAPACITOR	8200pF 50V K
C195	NCB11AK-106X	C CAPACITOR	10uF 10V K	C506	NCB31HK-822X	C CAPACITOR	8200pF 50V K
C196	NCB11AK-106X	C CAPACITOR	10uF 10V K	C507	NEHL1AM-107X	E CAPACITOR	100uF 10V M
C199	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C508	NEHL1HM-105X	E CAPACITOR	1uF 50V M
C200	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C509	NEHL1HM-105X	E CAPACITOR	1uF 50V M
C201	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C510	NEHL1CM-476X	E CAPACITOR	47uF 16V M
C202	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C511	NENA1CM-475X	BP E CAPACITOR	4.7uF 16V M
C207 C208	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	C512	NENA1CM-475X	BP E CAPACITOR	4.7uF 16V M
C212	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	C513	NENA1CM-475X	BP E CAPACITOR	4.7uF 16V M
	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	C514	NENA1CM-475X	BP E CAPACITOR	4.7uF 16V M
C213	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	C515	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C261	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C516	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C262	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C517	NEHL1EM-475X	E CAPACITOR	4.7uF 25V M
C263	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C518	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C264	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C519	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C281	NEHL1CM-476X	E CAPACITOR	47uF 16V M	C520	NEHL1CM-106X	E CAPACITOR	10uF 16V M
C291	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C531	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C292	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C532	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C293	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C533	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C381	NDC31HJ-680X	C CAPACITOR	68pF 50V J	C551	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C382	NDC31HJ-680X	C CAPACITOR	68pF 50V J	C552	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C383	NCB31AK-105X	C CAPACITOR	1uF 10V K	C553	NEHL1CM-476X	E CAPACITOR	47úF 16V M
C401	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C554	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C402	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C555	NEHL1AM-107X	E CAPACITOR	100uF 10V M
C403	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C556	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C404	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C557	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C405	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C558	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K
C406	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C559	NEHL0JM-226X	E CAPACITOR	22uF 6.3V M
C407	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C560	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K
C408	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C561	NEHL0JM-226X	E CAPACITOR	22uF 6.3V M
C409	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C562	NEHL0JM-226X	E CAPACITOR	22uF 6.3V M
C410	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C563	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C411	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C564	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C412	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C565	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C413	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C566	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C414	NCB11CK-105X	C CAPACITOR	1uF 16V K	C567	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C415	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C568	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C416	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C569	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C417	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C570	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C418	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C571	NEHL0JM-226X	E CAPACITOR	22uF 6.3V M
C419	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C572	NCB31CK-105X	C CAPACITOR	1uF 16V K
C420	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C573	NEHL0JM-226X	E CAPACITOR	22uF 6.3V M
C421	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C574	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C422	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C575	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C424	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C576	NEHL1AM-107X	E CAPACITOR	100uF 10V M
C425	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C577	NEHL1AM-107X	E CAPACITOR	100uF 10V M
C426	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C578	NEHL1AM-107X	E CAPACITOR	100uF 10V M
C427	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C579	NEHL1AM-107X	E CAPACITOR	100uF 10V M
C428	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C612	NEHL1CM-107X	E CAPACITOR	100uF 16V M
C429	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C614	NENA1CM-475X	BP E CAPACITOR	4.7uF 16V M
C430	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C615	NENA1CM-475X	BP E CAPACITOR	4.7uF 16V M
C431	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	C616	NEHL1CM-476X	E CAPACITOR	47uF 16V M
C432	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	C617	NEHL1CM-106X	E CAPACITOR	10uF 16V M
C433	NCB11CK-105X	C CAPACITOR	1uF 16V K	C623	NCB21CK-184X	C CAPACITOR	0.18uF 16V K
C440	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C624	NCB31HK-222X	C CAPACITOR	2200pF 50V K
C441	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C625	NCB31HK-183X	C CAPACITOR	0.018uF 50V K
C442	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C628	NCB31HK-123X	C CAPACITOR	0.012uF 50V K
C443	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C629	NCB31HK-222X	C CAPACITOR	2200pF 50V K
C444	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C630	NCB21CK-184X	C CAPACITOR	0.18uF 16V K
C445	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C632	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C446	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C633	NCB31HK-822X	C CAPACITOR	8200pF 50V K
C447	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C634	NCB31HK-822X	C CAPACITOR	8200pF 50V K
C448	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	C635	NCB31HK-681X	C CAPACITOR	680pF 50V K
C449	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	C636	NCB31HK-681X	C CAPACITOR	680pF 50V K
C450	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	C638	NCB31EK-223X	C CAPACITOR	0.022uF 25V K
C451	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	C639	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C452	NCB11CK-105X	C CAPACITOR	1uF 16V K	C640	NCB31CK-105X	C CAPACITOR	1uF 16V K
C453	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C641	NCB31CK-105X	C CAPACITOR	1uF 16V K
C454	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C642	NEHL1CM-106X	E CAPACITOR	10uF 16V M
C455	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C644	NEHL1EM-475X	E CAPACITOR	4.7uF 25V M
C456	NCB11CK-105X	C CAPACITOR	1uF 16V K	C646	NEHL1EM-475X	E CAPACITOR	4.7uF 25V M
C457	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C647	NCB31CK-105X	C CAPACITOR	1uF 16V K
C458	QENC1CM-476Z	BP E CAPACITOR	47uF 16V M	C648	NCB31CK-105X	C CAPACITOR	1uF 16V K
C459	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C649	NCB31CK-105X	C CAPACITOR	1uF 16V K
C461	NDC31HJ-101X	C CAPACITOR	100pF 50V J	C650	NCB31CK-105X	C CAPACITOR	1uF 16V K
C462	NDC31HJ-101X	C CAPACITOR	100pF 50V J	C651	NCB31CK-105X	C CAPACITOR	1uF 16V K
C463	NDC31HJ-101X	C CAPACITOR	100pF 50V J	C653	NCB31EK-223X	C CAPACITOR	0.022uF 25V K
C464	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C654	NCB31CK-473X	C CAPACITOR	0.047uF 16V K
C465	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C655	NEHL1CM-106X	E CAPACITOR	10uF 16V M
C466	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C657	NEHL1EM-475X	E CAPACITOR	4.7uF 25V M

⚠Ref No.	Part No.	Part Name	Description Local	∆Ref No.	Part No.	Part Name	Description Loca
C659	NEHL1EM-475X	E CAPACITOR	4.7uF 25V M	R143	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
C660 C661	NCB31CK-105X NCB31CK-105X	C CAPACITOR C CAPACITOR	1uF 16V K 1uF 16V K	R144 R145	NRSA63J-682X NRSA63J-333X	MG RESISTOR MG RESISTOR	6.8kΩ 1/16W J 33kΩ 1/16W J
C662	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	R148	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
C663 C664	NCB31CK-105X NCB31CK-105X	C CAPACITOR C CAPACITOR	1uF 16V K 1uF 16V K	R149 R150	NRSA63J-682X NRSA63J-333X	MG RESISTOR MG RESISTOR	6.8kΩ 1/16W J 33kΩ 1/16W J
C665	NCB31CK-105X	C CAPACITOR	1uF 16V K	R151	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
C666 C667	NCB11AK-106X NCB31CK-105X	C CAPACITOR C CAPACITOR	10uF 10V K 1uF 16V K	R152 R153	NRSA63J-682X NRSA63J-682X	MG RESISTOR MG RESISTOR	6.8kΩ 1/16W J 6.8kΩ 1/16W J
C668	NCB31CK-105X	C CAPACITOR	1uF 16V K	R154	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
C669 C670	NCB31CK-105X NCB31CK-105X	C CAPACITOR C CAPACITOR	1uF 16V K 1uF 16V K	R157 R158	NRSA63J-333X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	33kΩ 1/16W J 0Ω 1/16W J
C671	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	R159	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C672 C673	NCB21AK-225X NDC31HJ-330X	C CAPACITOR C CAPACITOR	2.2uF 10V K 33pF 50V J	R160 R161	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C674	NDC31HJ-330X	C CAPACITOR	33pF 50V J	R164	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
C675 C676	NEHL1CM-106X NCB31HK-104X	E CAPACITOR C CAPACITOR	10uF 16V M 0.1uF 50V K	R165 R166	NRSA63J-224X NRSA63J-224X	MG RESISTOR MG RESISTOR	220kΩ 1/16W J 220kΩ 1/16W J
C677	NCB31CK-105X	C CAPACITOR	1uF 16V K	R167	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
C678 C679	NCB31HK-153X NDC31HJ-330X	C CAPACITOR C CAPACITOR	0.015uF 50V K 33pF 50V J	R168 R169	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J
C680	NDC31HJ-330X	C CAPACITOR	33pF 50V J	R181	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
C681 C682	NEHL1CM-106X NCB31HK-104X	E CAPACITOR C CAPACITOR	10uF 16V M 0.1uF 50V K	R183 R184	NRSA63J-154X NRSA63J-224X	MG RESISTOR MG RESISTOR	150kΩ 1/16W J 220kΩ 1/16W J
C685	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R186	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C710 C716	NCB31HK-104X NEHL1CM-476X	C CAPACITOR E CAPACITOR	0.1uF 50V K 47uF 16V M	R187 R188	NRSA63J-0R0X NRSA63J-103X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J
C717	NCB31AK-105X	C CAPACITOR	1uF 10V K	R189	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C751 C752	NCB31HK-222X	C CAPACITOR E CAPACITOR	2200pF 50V K 1uF 50V M	R190 R191	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J
C752	NEHL1HM-105X NEHL0GM-227X	E CAPACITOR	220uF 4V M	R192	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C754	NEHL1CM-476X NEHL0GM-227X	E CAPACITOR E CAPACITOR	47uF 16V M	R193	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J
C755 C756	NEHLUGW-227X NEHL1HM-105X	E CAPACITOR E CAPACITOR	220uF 4V M 1uF 50V M	R195 R197	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C757	NEHL1HM-105X NCB31HK-222X	E CAPACITOR	1uF 50V M	R198 R199	NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J
C758 C759	NCB31HK-104X	C CAPACITOR C CAPACITOR	2200pF 50V K 0.1uF 50V K	R200	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C760	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R203	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C761 C904	NEHL1AM-107X NCB11AK-106X	E CAPACITOR C CAPACITOR	100uF 10V M 10uF 10V K	R206 R207	NRSA63J-562X NRSA63J-562X	MG RESISTOR MG RESISTOR	5.6kΩ 1/16W J 5.6kΩ 1/16W J
C905	NEHM1CM-476X	E CAPACITOR	47uF 16V M	R216	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C906 C913	NCB31EK-104X NEX51CM-335X	C CAPACITOR E CAPACITOR	0.1uF 25V K 3.3uF 16V M	R217 R218	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C914	NEX50JM-156X	E CAPACITOR	15uF 6.3V M	R219	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C920 C3001	NEX50JM-156X NCB31HK-222X	E CAPACITOR C CAPACITOR	15uF 6.3V M 2200pF 50V K	R220 R221	NRSA63J-101X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 0Ω 1/16W J
C3002	NEHL1CM-476X	E CAPACITOR	47uF 16V M	R227	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3003 C3004	NCB31CK-104X NEX60JM-227X	C CAPACITOR E CAPACITOR	0.1uF 16V K 220uF 6.3V M	R228 R231	NRSA63J-331X NRSA63J-330X	MG RESISTOR MG RESISTOR	330Ω 1/16W J 33Ω 1/16W J
C3005	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	R232	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
C3007 C3008	NCF31AZ-105X NCB31HK-103X	C CAPACITOR C CAPACITOR	1uF 10V Z 0.01uF 50V K	R233 R234	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C3009	NEHL1HM-106X	E CAPACITOR	10uF 50V M	R235	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3010 C3011	NCB31HK-103X NEHL1HM-106X	C CAPACITOR E CAPACITOR	0.01uF 50V K 10uF 50V M	R236 R237	NRSA63J-331X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	330Ω 1/16W J 0Ω 1/16W J
C3012	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R238	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3014 C3015	NEHL1HM-106X NCB31HK-103X	E CAPACITOR C CAPACITOR	10uF 50V M 0.01uF 50V K	R239 R241	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C3501	NCB11AK-106X	C CAPACITOR	10uF 10V K	R242	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C3502 C3503	NCB31CK-104X NCB31HK-103X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.01uF 50V K	R243 R245	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C3511	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R246	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3512 C3513	NCB31HK-103X NDC31HJ-2R0X	C CAPACITOR C CAPACITOR	0.01uF 50V K 2pF 50V J	R247 R248	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C3514	NDC31HJ-2R0X	C CAPACITOR	2pF 50V J	R249	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3515 C3516	NCB31CK-104X NEHL1AM-107X	C CAPACITOR E CAPACITOR	0.1uF 16V K 100uF 10V M	R250 R251	NRSA63J-223X NRSA63J-153X	MG RESISTOR MG RESISTOR	22kΩ 1/16W J 15kΩ 1/16W J
C3517	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R252	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3518 C3523	NCB31HK-222X NDC31HJ-102X	C CAPACITOR C CAPACITOR	2200pF 50V K 1000pF 50V J	R253 R254	NRSA63J-0R0X NRSA63J-223X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 22kΩ 1/16W J
C3524	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	R255	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J
C3525 C3526	NEHL1CM-106X NCB31HK-103X	E CAPACITOR C CAPACITOR	10uF 16V M 0.01uF 50V K	R256 R257	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C3527	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	R259	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3528 C3529	NEHL1AM-107X NEHL1CM-106X	E CAPACITOR E CAPACITOR	100uF 10V M 10uF 16V M	R260 R261	NRSA63J-101X NRSA63J-272X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 2.7kΩ 1/16W J
C3530	NCB11AK-106X	C CAPACITOR	10uF 10V K	R262	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3531 C3534	NCB31CK-104X NCF31AZ-105X	C CAPACITOR C CAPACITOR	0.1uF 16V K 1uF 10V Z	R263 R264	NRSA63J-331X NRSA63J-101X	MG RESISTOR MG RESISTOR	330Ω 1/16W J 100Ω 1/16W J
C3535	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	R265	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C3536 C3537	NCB11AK-106X NCB31CK-104X	C CAPACITOR C CAPACITOR	10uF 10V K 0.1uF 16V K	R266 R267	NRSA63J-101X NRSA63J-331X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 330Ω 1/16W J
C3544	NCB31AK-105X	C CAPACITOR	1uF 10V K	R268	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
C3546 C3561	NCB31AK-105X NCB31HK-103X	C CAPACITOR C CAPACITOR	1uF 10V K 0.01uF 50V K	R269 R270	NRSA63J-750X NRSA63J-750X	MG RESISTOR MG RESISTOR	75Ω 1/16W J 75Ω 1/16W J
C3564	NRSA63J-0R0X	MG RESISTOR	0.010F 50V K 0Ω 1/16W J	R271	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R140	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R272 R273	NRSA63J-750X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	75Ω 1/16W J 0Ω 1/16W J
R141	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R274	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R142	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	R275	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J

Ref No.	Part No.	Part Name	Description Local	Ref No.	Part No.	Part Name	Description Local
R276	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R509	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R277 R278	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R510 R511	NRSA63J-332X NRSA63J-103X	MG RESISTOR	3.3kΩ 1/16W J 10kΩ 1/16W J
R278 R284	NRSA63J-0R0X NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	R512	NRSA63J-333X	MG RESISTOR MG RESISTOR	33kΩ 1/16W J
R286 R288	NRSA63J-333X NRSA63J-750X	MG RESISTOR MG RESISTOR	33kΩ 1/16W J 75Ω 1/16W J	R513 R514	NRSA63J-333X NRSA63J-103X	MG RESISTOR MG RESISTOR	33kΩ 1/16W J 10kΩ 1/16W J
R289	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	R515	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R293 R294	NRSA63J-750X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	75Ω 1/16W J 0Ω 1/16W J	R516 R517	NRSA63J-0R0X NRSA63J-333X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 33kΩ 1/16W J
R382 R384 R385 R388	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R518	NRSA63J-333X	MG RESISTOR MG RESISTOR	33kΩ 1/16W J
R384 R385	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R519 R520	NRSA63J-333X NRSA63J-333X	MG RESISTOR MG RESISTOR	33kΩ 1/16W J 33kΩ 1/16W J
R388	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R521	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R390 R394	NRSA63J-101X NRSA63J-103X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 10kΩ 1/16W J	R522 R523	NRSA63J-332X NRSA63J-102X	MG RESISTOR MG RESISTOR	3.3kΩ 1/16W J 1kΩ 1/16W J
R401	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	R524	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R402 R403	NRSA63J-750X NRSA63J-750X	MG RESISTOR MG RESISTOR	75Ω 1/16W J 75Ω 1/16W J	R525 R526	NRSA63J-102X NRSA63J-102X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 1kΩ 1/16W J
R404	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	R527	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R405 R406	NRSA63J-750X NRSA63J-680X	MG RESISTOR MG RESISTOR	75Ω 1/16W J 68Ω 1/16W J	R528 R529	NRSA63J-471X NRSA63J-101X	MG RESISTOR MG RESISTOR	470Ω 1/16W J 100Ω 1/16W J
R407	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R530	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R408 R410	NRSA63J-0R0X NRSA63J-750X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 75Ω 1/16W J	R531 R532	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J
R411	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	R533	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R412 R413	NRSA63J-750X NRSA63J-224X	MG RESISTOR MG RESISTOR	75Ω 1/16W J 220kΩ 1/16W J	R534 R535	NRSA63J-0R0X NRSA63J-101X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 100Ω 1/16W J
R414	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J 220kΩ 1/16W J	R536	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R419 R420	NRSA63J-224X NRSA63J-224X	MG RESISTOR MG RESISTOR	220kΩ 1/16W J 220kΩ 1/16W J	R538 R539	NRSA63J-102X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 0Ω 1/16W J
R421 R422	NRSA63J-750X NRSA63J-750X	MG RESISTOR	75Ω 1/16W J 75Ω 1/16W J	R553 R554	NRSA63J-103X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J
R423 R426	NRSA63J-750X	MG RESISTOR MG RESISTOR	75Ω 1/16W J	R555	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R426	NRSA63J-103X NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	R556	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J
R427 R428	NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J	R557 R560	NRSA63J-682X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 6.8kΩ 1/16W J
R429 R430	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R561 R562	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R437	NRSA63J-680X NRSA63J-391X	MG RESISTOR MG RESISTOR	68Ω 1/16W J 390Ω 1/16W J	R563	NRSA63J-221X NRSA63J-221X	MG RESISTOR MG RESISTOR	220Ω 1/16W J 220Ω 1/16W J
R438 R439	NRSA63J-223X NRSA63J-471X	MG RESISTOR MG RESISTOR	22kΩ 1/16W J 470Ω 1/16W J	R564 R565	NRSA63J-221X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	220Ω 1/16W J 0Ω 1/16W J
R440	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	R566	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R441 R442	NRSA63J-223X NRSA63J-471X	MG RESISTOR MG RESISTOR	22kΩ 1/16W J 470Ω 1/16W J	R567 R568	NRSA63J-101X NRSA63J-103X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 10kΩ 1/16W J
R443	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R569	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R444 R445	NRSA63J-393X NRSA63J-393X	MG RESISTOR MG RESISTOR	39kΩ 1/16W J 39kΩ 1/16W J	R570 R571	NRSA63J-101X NRSA63J-105X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 1MΩ 1/16W J
R446	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R572	NRSA63J-4R7X	MG RESISTOR	4.7Ω 1/16W J
R447 R448	NRSA63J-471X NRSA63J-471X	MG RESISTOR MG RESISTOR	470Ω 1/16W J 470Ω 1/16W J	R573 R574	NRSA63J-103X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 0Ω 1/16W J
R450	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	R575	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R451 R453	NRSA63J-750X NRSA63J-750X	MG RESISTOR MG RESISTOR	75Ω 1/16W J 75Ω 1/16W J	R576 R577	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J
R454	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	R578	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R455 R456	NRSA63J-222X NRSA63J-680X	MG RESISTOR MG RESISTOR	2.2kΩ 1/16W J 68Ω 1/16W J	R584 R585	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J
R457 R458	NRSA63J-223X NRSA63J-391X	MG RESISTOR MG RESISTOR	22kΩ 1/16W J 390Ω 1/16W J	R588 R590	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R459	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R593	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R460 R461	NRSA63J-391X NRSA63J-750X	MG RESISTOR MG RESISTOR	390Ω 1/16W J 75Ω 1/16W J	R594 R599	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R462	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R621	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J
R463 R464	NRSA63J-0R0X NRSA63J-750X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 75Ω 1/16W J	R622 R623	NRSA63J-153X NRSA63J-104X	MG RESISTOR MG RESISTOR	15kΩ 1/16W J 100kΩ 1/16W J
R467	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	R624	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R474 R475	NRSA63J-332X NRSA63J-331X	MG RESISTOR MG RESISTOR	3.3kΩ 1/16W J 330Ω 1/16W J	R625 R626	NRSA63J-563X NRSA63J-563X	MG RESISTOR MG RESISTOR	56kΩ 1/16W J 56kΩ 1/16W J
R476	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	R634	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J
R477 R478	NRSA63J-151X NRSA63J-151X	MG RESISTOR MG RESISTOR	150Ω 1/16W J 150Ω 1/16W J	R635 R636	NRSA63J-563X NRSA63J-473X	MG RESISTOR MG RESISTOR	56kΩ 1/16W J 47kΩ 1/16W J
R479	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	R638	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J
R480 R481	NRSA63J-562X NRSA63J-332X	MG RESISTOR MG RESISTOR	5.6kΩ 1/16W J 3.3kΩ 1/16W J	R639 R640	NRSA63J-821X NRSA63J-821X	MG RESISTOR MG RESISTOR	820Ω 1/16W J 820Ω 1/16W J
R482	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	R642	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
R483 R484	NRSA63J-332X NRSA63J-471X	MG RESISTOR MG RESISTOR	3.3kΩ 1/16W J 470Ω 1/16W J	R644 R645	NRSA63J-392X NRSA63J-222X	MG RESISTOR MG RESISTOR	3.9kΩ 1/16W J 2.2kΩ 1/16W J
R485	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	R647	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J
R486 R487	NRSA63J-391X NRSA63J-391X	MG RESISTOR MG RESISTOR	390Ω 1/16W J 390Ω 1/16W J	R649 R650	NRSA63J-683X NRSA63J-333X	MG RESISTOR MG RESISTOR	68kΩ 1/16W J 33kΩ 1/16W J
R488	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R651	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R489 R491	NRSA63J-223X NRSA63J-105X	MG RESISTOR MG RESISTOR	22kΩ 1/16W J 1MΩ 1/16W J	R652 R653	NRSA63J-101X NRSA63J-562X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 5.6kΩ 1/16W J
R501	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R654	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R502 R503	NRSA63J-221X NRSA63J-472X	MG RESISTOR MG RESISTOR	220Ω 1/16W J 4.7kΩ 1/16W J	R661 R662	NRSA63J-332X NRSA63J-332X	MG RESISTOR MG RESISTOR	3.3kΩ 1/16W J 3.3kΩ 1/16W J
R504 R505	NRSA63J-332X	MG RESISTOR MG RESISTOR	3.3kΩ 1/16W J	R665	NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J
R506	NRSA63J-332X NRSA63J-472X	MG RESISTOR	3.3kΩ 1/16W J 4.7kΩ 1/16W J	R666 R669	NRSA63J-101X NRSA63J-105X	MG RESISTOR	100Ω 1/16W J 1MΩ 1/16W J
R507 R508	NRSA63J-332X NRSA63J-102X	MG RESISTOR MG RESISTOR	3.3kΩ 1/16W J 1kΩ 1/16W J	R670 R671	NRSA63J-103X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 0Ω 1/16W J
11000	11110/1000-102/	WIG INCOMINE	11/22 1/ 1044 Q	1107 1	11110/1000-0110/1	WIG INCOIDIN	022 1/ 1044 A

⚠Ref No.	Part No.	Part Name	Description Local	ÆRef No.	Part No.	Part Name	Description Local
R687 R688 R689 R690	NRSA63J-103X NRSA63J-222X NRSA63J-222X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR	10kΩ 1/16W J 2.2kΩ 1/16W J 2.2kΩ 1/16W J 3.3kΩ 1/16W J	J401 J402 J403 J405	QNZ0463-001 QNZ0463-001 QNZ0726-001 QNN0649-001	21 PIN SOCKET 21 PIN SOCKET AV JACK PIN JACK	EXT-1 EXT-2 EXT-3 AUDIO IN
R694 R695 R696 R700 R701	NRSA63J-332X NRSA63J-0R0X NRSA63J-0R0X NRSA63J-0R0X NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J 100Ω 1/16W J 100Ω 1/16W J	J406 J410 K661 K3501 K3502	QNN0049-001 QNZ0561-001 QNZ0561-001 NQR0499-002X NQR0389-003X NQR0389-003X	PIN JACK PIN JACK D CONNECTOR FERRITE BEADS FERRITE BEADS FERRITE BEADS	EXT-4 DC IN
R702 R703 R704 R711 R712	NRSA63J-101X NRSA63J-101X NRSA63J-101X NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J 100Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J	LC3501 ATU3002 UD3001 X551 X661	NQR0431-001X QAU0428-002 QAU0429-001 NAX0623-001X NAX0857-001X	EMI FILTER TUNER RF SPLITTER C RESONATOR C RESONATOR	25.00MHz
R712 R713 R714 R718 R719 R720	NRSA63J-0R0X NRSA63J-0R0X NRSA63J-104X NRSA63J-563X NRSA63J-153X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J 100kΩ 1/16W J 56kΩ 1/16W J 15kΩ 1/16W J	X3501	QAX0773-001Z	CRYSTAL	18.4MHz
R723 R751 R752	NRSA63J-0R0X NRSA63J-102X NRSA63J-101X	MG RESISTOR MG RESISTOR MG RESISTOR	0Ω 1/16W J 1kΩ 1/16W J 100Ω 1/16W J	∆ Ref No.	Part No.	ASS'Y (SFL-622' Part Name	Description Local
R755 R756 R757 R758 R759	NRSA63J-0R0X NRSA63J-0R0X NRSA63J-472X NRSA63J-104X NRSA63J-0R0X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J 4.7kΩ 1/16W J 100kΩ 1/16W J 0Ω 1/16W J	IC6201 IC6501 IC6621 IC6661	PQ20WZ11-X RC4558D-X LM393DR-X TDA8928ST/N1	IC IC IC	
R760 R761 R764 R765	NRSA63J-473X NRSA63J-0R0X NRSA63J-102X NRSA63J-220X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR	47kΩ 1/16W J 0Ω 1/16W J 1kΩ 1/16W J 22Ω 1/16W J	Q6611 Q6612 Q6613	2SC3928A/QR/-X 2SC3928A/QR/-X 2SA1530A/QR/-X	TRANSISTOR TRANSISTOR TRANSISTOR	
R768 R769 R770 R921	NRSA63J-102X NRSA63J-220X NQR0146-003X NRSA63J-0R0X	MG RESISTOR MG RESISTOR FERRITE BEADS MG RESISTOR	1kΩ 1/16W J 22Ω 1/16W J 0Ω 1/16W J	Q6661 Q6662 Q6663	UN2112-X 2SC3928A/QR/-X UN2212-X	DIGI TRANSISTOR TRANSISTOR DIGI TRANSISTOR	
R922 R923 R924 R925	NRSA63J-0R0X NRSA63J-0R0X NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J	D6201 D6501 D6663 D6664	1SS355W-X UDZW6.2B-X UDZW3.3B-X 1SS355W-X	CHIP DIODE Z DIODE Z DIODE CHIP DIODE	
R926 R927 R3002 R3003 R3006	NRSA63J-0R0X NRSA63J-0R0X NRSA63J-473X NRSA63J-473X NRSA63J-101X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J 47kΩ 1/16W J 47kΩ 1/16W J 100Ω 1/16W J	D6671 D6672 D6673 D6674	UDZW20B-X UDZW20B-X UDZW20B-X UDZW20B-X	Z DIODE Z DIODE Z DIODE Z DIODE	
R3007 R3008 R3009 R3010	NRSA63J-0R0X NRSA63J-0R0X NRSA63J-222X NRSA63J-102X NRSA63J-102X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J 2.2kΩ 1/16W J 1kΩ 1/16W J	C6201 C6202 C6203 C6204	NCB31HK-103X NEHL1EM-336X NEHL1EM-336X NCB31EK-104X	C CAPACITOR E CAPACITOR E CAPACITOR C CAPACITOR	0.01uF 50V K 33uF 25V M 33uF 25V M 0.1uF 25V K
R3011 R3016 R3020 R3021 R3022	NRSA63J-102X NRSA63J-101X NRSA63J-0R0X NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR	1kΩ 1/16W J 100Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J	C6205 C6501 C6502 C6503 C6504	NCB31HK-103X NENA1CM-475X NENA1CM-475X NDC31HJ-100X NDC31HJ-100X	C CAPACITOR BP E CAPACITOR BP E CAPACITOR C CAPACITOR C CAPACITOR	0.01uF 50V K 4.7uF 16V M 4.7uF 16V M 10pF 50V J 10pF 50V J
R3023 R3024 R3025 R3026	NRSA63J-0R0X NRSA63J-0R0X NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J	C6505 C6506 C6507 C6508	NEHL1CM-476X NEHL1CM-476X NEHL1HM-105X NEHL1HM-105X	E CAPACITOR E CAPACITOR E CAPACITOR E CAPACITOR E CAPACITOR	47uF 16V M 47uF 16V M 1uF 50V M 1uF 50V M
R3027 R3028 R3029 R3042	NRSA63J-0R0X NRSA63J-0R0X NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J	C6601 C6602 C6611 C6621	NDC31HJ-101X NDC31HJ-101X NEHL0JM-226X NCB31HK-332X	C CAPACITOR C CAPACITOR E CAPACITOR C CAPACITOR	100pF 50V J 100pF 50V J 22uF 6.3V M 3300pF 50V K
R3505 R3506 R3508 R3511 R3512	NRSA63J-0R0X NRSA63J-0R0X NRSA63J-102X NRSA63J-222X NRSA63J-102X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J 1kΩ 1/16W J 2.2kΩ 1/16W J 1kΩ 1/16W J	C6622 C6623 C6624 C6625 C6626	NCB31HK-104X NEHL1EM-226X NCB31HK-222X NCB31CK-104X NCB31HK-222X	C CAPACITOR E CAPACITOR C CAPACITOR C CAPACITOR C CAPACITOR C CAPACITOR	0.1uF 50V K 22uF 25V M 2200pF 50V K 0.1uF 16V K 2200pF 50V K
R3514 R3515 R3516 R3517	NRSA63J-101X NRSA63J-101X NRSA63J-101X NRSA63J-103X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J 100Ω 1/16W J 10kΩ 1/16W J	C6627 C6628 C6629 C6630	NCB31HK-104X NEHL1EM-226X NCB31HK-222X NCB31CK-104X	C CAPACITOR E CAPACITOR C CAPACITOR C CAPACITOR C CAPACITOR	0.1uF 50V K 22uF 25V M 2200pF 50V K 0.1uF 16V K
R3530 R3546 R3547	NRSA63J-0R0X NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J	C6631 C6632 C6661 C6662	NCB31HK-222X NCB31HK-332X NCB11EK-105X NCB11EK-105X	C CAPACITOR C CAPACITOR C CAPACITOR C CAPACITOR	2200pF 50V K 3300pF 50V K 1uF 25V K 1uF 25V K
L101 L501 L902 L903 L906	NQL79GM-100X NRSA02J-0R0X NQL52EM-220X NQR0562-010X NQL52EM-220X	COIL MG RESISTOR COIL CHOKE COIL COIL	10uH M 0Ω 1/10W J 22uH M 22uH M	C6663 C6664 C6665 C6666 C6667	NCB31HK-104X QETN1HM-226Z NCB31HK-104X QETN1HM-226Z NCB31HK-104X	C CAPACITOR E CAPACITOR C CAPACITOR E CAPACITOR C CAPACITOR	0.1uF 50V K 22uF 50V M 0.1uF 50V K 22uF 50V M 0.1uF 50V K
L3001 L3002 L3003 L3502	NQL79GM-220X NQL79GM-100X NQL79GM-220X NRSA02J-0R0X	COIL COIL COIL MG RESISTOR	22uH M 10uH M 22uH M 0Ω 1/10W J	C6668 C6669 C6670 C6671	NCB31HK-561X QFV21HJ-224Z QFVF1HJ-474Z NCB31HK-153X	C CAPACITOR MF CAPACITOR MF CAPACITOR C CAPACITOR	560pF 50V K 0.22uF 50V J 0.47uF 50V J 0.015uF 50V K
L3503 L3504 L3506 L3507	NRSA02J-0R0X NQL79GM-4R7X NRSA02J-0R0X NRSA02J-0R0X	MG RESISTOR COIL MG RESISTOR MG RESISTOR	0Ω 1/10W J 4.7uH M 0Ω 1/10W J 0Ω 1/10W J	C6672 C6673 C6674 C6675 C6676	QETN1EM-477Z NCB31HK-104X QETN1EM-477Z NCB31HK-104X NCB31HK-561X	E CAPACITOR C CAPACITOR E CAPACITOR C CAPACITOR C CAPACITOR	470uF 25V M 0.1uF 50V K 470uF 25V M 0.1uF 50V K 560pF 50V K
CN001 CN002	QGF0508C2-50W QGF0508C2-40W	CONNECTOR CONNECTOR	FFC/FPC (1-50) FFC/FPC (1-40)	C6677 C6678	NCB31HK-561X NCB31HK-561X QFV21HJ-224Z	C CAPACITOR C CAPACITOR MF CAPACITOR	560pF 50V K 560pF 50V K 0.22uF 50V J

⚠Ref No.	Part No.	Part Name	Description Lo
C6679 C6680 C6681 C6682 C6683 C6684 C6685 C6686	QFVF1HJ-474Z NCB31HK-153X NCB31HK-561X NCB31HK-104X NCB31HK-104X NCB31HK-104X QETN1EM-477Z NCB31HK-104X QETN1EM-477Z	MF CAPACITOR C CAPACITOR C CAPACITOR C CAPACITOR C CAPACITOR C CAPACITOR E CAPACITOR C CAPACITOR C CAPACITOR C CAPACITOR C CAPACITOR	0.47uF 50V J 0.015uF 50V K 560pF 50V K 0.1uF 50V K 0.1uF 50V K 0.1uF 50V K 470uF 25V M 0.1uF 50V K 470uF 25V M
R6201 R6202 R6203 R6204 R6205 R6501 R6501 R6502 R6503 R6504 R6505 R6506 R6607 R6601 R6602 R6603 R6601 R6602 R6603 R6604 R6602 R6603 R6604 R6604 R6605 R6606 R6607 R6601 R6606 R6607 R6601 R6608 R6607 R6601 R6608 R6609 R6670 R6671 R6673 R6674 R6675 R6676 R6677 R6680 R6671 R6676 R6677 R6680 R6691	NRSA63J-0ROX NRSA63J-182X NRSA63J-183X NRSA63J-183X NRSA63J-622X NRSA63J-362X NRSA63J-104X NRSA63J-104X NRSA63J-104X NRSA63J-102X NRSA63J-102X NRSA63J-102X NRSA63J-101X NRSA63J-101X NRSA63J-101X NRSA63J-101X NRSA63J-101X NRSA63J-101X NRSA63J-101X NRSA63J-101X NRSA63J-101X NRSA63J-101X NRSA63J-101X NRSA63J-101X NRSA63J-101X NRSA63J-101X NRSA63J-101X NRSA63J-101X NRSA63J-101X NRSA63J-101X NRSA63J-102X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-102X NRSA63J-102X NRSA63J-103X NRSA63J-103X NRSA63J-102X NRSA63J-102X NRSA63J-103X NRSA63J-102X NRSA63J-102X NRSA63J-102X NRSA63J-102X NRSA63J-102X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X NRSA63J-103X	MG RESISTOR	0Ω 1/16W J 1.8kΩ 1/16W J 1.8kΩ 1/16W J 5.6kΩ 1/16W J 47kΩ 1/16W J 8.2kΩ 1/16W J 3.3kΩ 1/16W J 100kΩ 1/16W J 8.2kΩ 1/16W J 3.3kΩ 1/16W J 100kΩ 1/16W J 5.6kΩ 1/16W J 3.3kΩ 1/16W J 10kΩ 1/16W J 100Ω 1/16W J 10Ω 1/16W J
L6661 L6662	NQLC8CM-560X NQLC8CM-560X	COIL COIL	56uH M 56uH M
K6601 K6602 K6661 K6662 K6663 K6664 TH6401	NQR0499-002X NQR0499-002X NQR0499-002X NQR0499-002X NQR0499-002X NQR0499-002X NAD0035-471X	FERRITE BEADS FERRITE BEADS FERRITE BEADS FERRITE BEADS FERRITE BEADS FERRITE BEADS P THERMISTOR	470Ω

SW P.W. BOARD ASS'Y (SFL-7206A-U2)

_Ref No.	Part No.	Part Name	Description Local
D7011	UDZW6.2B-X	Z DIODE	
C7011	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C7012	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
R7011	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R7012	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R7013	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J

Ref No.	Part No.	Part Name	Description Local
R7014 R7015 R7016 R7017 R7701 R7702 R7703 R7704 R7707 R7708 R7710	NRSA63J-0R0X NRSA63J-103X NRSA63J-101X NRSA63J-0R0X NRSA63J-472X NRSA63J-822X NRSA63J-472X NRSA63J-472X NRSA63J-0R0X NRSA63J-0R0X NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J 100Ω 1/16W J 0Ω 1/16W J 4.7kΩ 1/16W J 8.2kΩ 1/16W J 4.7kΩ 1/16W J 8.2kΩ 1/16W J 0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J
R7711 L7001 L7002 J7001 K7001 S7701 S7702 S7703 S7704 S7705 S7706 S7707	NRSA63J-0R0X NRSA02J-0R0X NRSA02J-0R0X QNS0051-001 NRSA63J-0R0X QSW0619-003Z QSW0619-003Z QSW0619-003Z QSW0619-003Z QSW0619-003Z QSW0619-003Z QSW0619-003Z	MG RESISTOR MG RESISTOR MG RESISTOR 3.5 JACK MG RESISTOR PUSH SWITCH	0Ω 1/16W J 0Ω 1/10W J 0Ω 1/10W J HEADPHONE 0Ω 1/16W J CH- CH+ MENU/OK TV/AV VOL+ VOL- POWER

LED P.W. BOARD ASS'Y (SFL-8703A-U2)

⚠Ref No.	Part No.	Part Name	Description Loca
IC8752	GP1UM261RKVF	IR DETECT UNIT	
Q8701 Q8704 Q8705 Q8709 Q8712 Q8713	RT1N241C-X RT1P440C-X RT1P440C-X RT1N241C-X RT1N241C-X RT1N241C-X	DIGI TRANSISTOR DIGI TRANSISTOR DIGI TRANSISTOR DIGI TRANSISTOR DIGI TRANSISTOR DIGI TRANSISTOR	
D8701 D8705 D8712 D8713	SML72420C-T SELU5E20C-T UDZW6.8B-X UDZW6.8B-X	LED LED Z DIODE Z DIODE	POWER ILLUMINATION
C8752	NEHL1CM-476X	E CAPACITOR	47uF 16V M
R8711 R8713 R8714 R8717 R8722 R8723 R8724 R8755	NRSA63J-103X NRSA63J-331X NRSA63J-331X NRSA63J-103X NRSA63J-101X NRSA63J-271X NRSA63J-0R0X NRSA63J-102X	MG RESISTOR	10kΩ 1/16W J 330Ω 1/16W J 330Ω 1/16W J 10kΩ 1/16W J 100Ω 1/16W J 270Ω 1/16W J 0Ω 1/16W J 1kΩ 1/16W J

POWER P.W. BOARD ASS'Y (SFL-9043A-U2)

⚠Ref No.	Part No.	Part Name	Description Local
IC9202	BA50BC0FP-X	IC	
IC9501	STR-X6768N-F2	IC	
Q9001	2SC3928A/QR/-X	TRANSISTOR	
Q9503	2SC3928A/QR/-X	TRANSISTOR	
Q9505	2SC3928A/QR/-X	TRANSISTOR	
△D9001 D9002 D9201 D9501 D9501 D9503 D9504 D9505 D9506 D9507 D9508 D9510 D9511 D9512 D9513 D9514 D9515	TS25P05G-C2 1SS355W-X D2SBA60 1SS355W-X MTZJ33B-T2 1SS355W-X RF101L2S-X RF101L2S-X SARS01-T2 SARS01-T2 SARS01-T2 FR105GT-T3 RL2Z-LFC4 RL2Z-LFC4 FMX-G22S FMX-G22S FMX-G22S FR105GT-T3 UTCTL431-T	BRIDGE DIODE CHIP DIODE BRIDGE DIODE CHIP DIODE Z DIODE CHIP DIODE SI DIODE	

⚠Ref No.	Part No.	Part Name	Description Local	⚠Ref No.	Part No.	Part Name	Description Loc
D9516 D9517 D9518 D9519 D9520 D9521	MA3100/H/-X MA3100/H/-X 1SS355W-X UDZW3.0B-X 1SS355W-X MA3100/H/-X	Z DIODE Z DIODE CHIP DIODE Z DIODE CHIP DIODE Z DIODE		⚠CP9504 ⚠CP9505 ⚠CP9506 ⚠F9001 K9202 K9501	ICP-N70-T ICP-N70-T QMFZ043-5R0Z-J1 QMF5AD2-6R3-J1 NRSA02J-0R0X QRN143J-0R0X	IC PROTECTOR IC PROTECTOR FUSE FUSE MG RESISTOR C RESISTOR	2.5A 2.5A 5A 6.3A AC250V 0Ω 1/10W J 0Ω 1/4W J
		MMCADACITOD	4E A COEOV/ I/	K9503	QRN143J-0R0X	C RESISTOR	0Ω 1/4W J
∆C9001 ∆C9002	QFZ9072-105 QFZ9072-105	MM CAPACITOR MM CAPACITOR	1uF AC250V K 1uF AC250V K	K9505 K9506	QRN143J-0R0X QRN143J-0R0X	C RESISTOR C RESISTOR	0Ω 1/4W J 0Ω 1/4W J
∆C9003 ∆C9004	QCZ9078-222 QCZ9078-222	C CAPACITOR C CAPACITOR	2200pF AC250V M 2200pF AC250V M	K9507 K9508	QRN143J-0R0X QRN143J-0R0X	C RESISTOR C RESISTOR	0Ω 1/4W J 0Ω 1/4W J
∆ C9005	QCZ9078-222	C CAPACITOR	2200pF AC250V M	K9512	NRSA02J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/10W J
	QCZ9071-102 QCZ9071-102	C CAPACITOR C CAPACITOR		K9513	NRSA02J-0R0X NRSA02J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/10W J 0Ω 1/10W J
∆ C9012	QCZ9071-471	C CAPACITOR		K9514 K9515	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
C9204 C9206	QEZ0814-475Z QEHR1HM-105Z	E CAPACITOR E CAPACITOR	4.7uF 1uF 50V M	△LF9001 △LF9002	QQR1467-001 QQR1281-004	LINE FILTER LINE FILTER	
 ∆C9209	QCZ9071-471	C CAPACITOR		∆ LF9003	QQR1514-001 PS2581AL2/QW/-W	LINE FILTER	
C9211 C9212	QECR1CM-477Z QEHR1AM-337Z	E CAPACITOR E CAPACITOR	470uF 16V M 330uF 10V M	▲PC9501 ▲RY9001	PS2581AL2/QW/-W QSK0162-001	PHOTO COUPLER RELAY	
C9213	QEHR1CM-107Z	E CAPACITOR	100uF 16V M	∆VA9001	QAF0060-621	VARISTOR	620V
C9215 C9501	NCB31HK-104X NCB31HK-104X	C CAPACITOR C CAPACITOR	0.1uF 50V K 0.1uF 50V K				
C9502	QEHR1HM-335Z	E CAPACITOR	3.3uF 50V M				
C9503 C9504	NCB31HK-102X NCB31HK-104X	C CAPACITOR C CAPACITOR	1000pF 50V K 0.1uF 50V K	DC-DC	P.W. BOARD AS	SS'Y (SFL-9143A-U	J2)
C9505 C9506	NCB31HK-471X	C CAPACITOR C CAPACITOR	470pF 50V K	⚠Ref No.	Part No.	Part Name	Description Loc
C9507	QCZ0340-561 QEZ0739-337	E CAPACITOR	560pF 2kV K 330uF				
C9508 C9509	QFP32JK-332 QEHR1HM-336Z	PP CAPACITOR E CAPACITOR	3300pF 630V K 33uF 50V M	IC9601 IC9602	MP1593DN-X	IC IC	
C9518	QECR2AM-156Z	E CAPACITOR	15uF 100V M	IC9603	MP1593DN-X LM393DR-X	IC IC	
C9519 C9520	QECQ1VM-128 QECQ1VM-128	E CAPACITOR E CAPACITOR	1200uF 35V M 1200uF 35V M	IC9701 IC9751	MP1580HS-X MM1662GH-X	IC IC IC IC	
C9521	QECQ1VM-128	E CAPACITOR C CAPACITOR	1200uF 35V M	IC9801	MP1593DN-X	IC	
C9522 C9523	NCB31HK-104X QECQ1EM-188	C CAPACITOR E CAPACITOR	0.1uF 50V K 1800uF 25V M	IC9851 IC9901	BA09FP-X PQ20WZ11-X	IC IC	
C9525	QECR1EM-687Z	E CAPACITOR	680uF 25V M				
C9526 C9527	QECR1EM-687Z QECR1EM-227Z	E CAPACITOR E CAPACITOR	680uF 25V M 220uF 25V M	Q9601 Q9651	2SC3928A/QR/-X 2SC3928A/QR/-X	TRANSISTOR TRANSISTOR	
C9528	QECR1VM-227Z	E CAPACITOR	220uF 35V M	Q9801	2SC3928A/QR/-X	TRANSISTOR	
C9529 C9530	QEHR1HM-105Z NCB31HK-222X	E CAPACITOR C CAPACITOR	1uF 50V M 2200pF 50V K	D9601	EC30HA04-X	SB DIODE	
A D0001	QRZ9046-105Z	C DESISTOR	1MO 1/2W K	D9602	1SS355W-X	CHIP DIODE	
∆ R9001 R9003	NRSA63J-222X	C RESISTOR MG RESISTOR	1MΩ 1/2W K 2.2kΩ 1/16W J	D9603 D9604	UDZW3.0B-X PTZ6.8B-X	Z DIODE Z DIODE	
R9004 ∆ R9209	NRSA63J-473X QRZ9046-685Z	MG RESISTOR C RESISTOR	47kΩ 1/16W J 6.8MΩ 1/2W K	D9605 D9606	EC30HA04-X EC30HA04-X	SB DIODE SB DIODE	
R9501	NRS12BJ-224W	MG RESISTOR	220kΩ 1/2W J	D9652 D9653	EC30HA04-X	SB DIODE	
R9502 R9503	NRS12BJ-224W NRSA63J-473X	MG RESISTOR MG RESISTOR	220kΩ 1/2W J 47kΩ 1/16W J	D9653 D9654	EC30HA04-X PTZ6.8B-X	SB DIODE Z DIODE	
R9504	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	D9655	1SS355W-X	CHIP DIODE	
R9505 R9506	QRK126J-101X QRT029J-R27	UNF C RESISTOR MF RESISTOR	100Ω 1/2W J 0.27Ω 2W J	D9681 D9682	UDZW9.1B-X 1SS355W-X	Z DIODE CHIP DIODE	
R9507 R9508	QRT029J-R27	MF RESISTOR	0.27Ω 2W J	D9701	EC30HA03L-X	SB DIODE	
R9509	NRSA63J-332X QRL039J-220	MG RESISTOR OMF RESISTOR	3.3kΩ 1/16W J 22Ω 3W J	D9702 D9703	EC30HA03L-X PTZ3.9B-X	SB DIODE Z DIODE	
R9510 ∆ R9512	QRE121J-564Y QRE121J-470Y	C RESISTOR C RESISTOR	560kΩ 1/2W J 47Ω 1/2W J	D9802 D9803	EC30HA04-X 1SS355W-X	SB DIODE CHIP DIODE	
R9513	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	D9803	PTZ6.8B-X	Z DIODE	
R9514 R9515	NRSA63J-102X QRG01GJ-821	MG RESISTOR OMF RESISTOR	1kΩ 1/16W J 820Ω 1W J	D9901	D1FS4-X	SB DIODE	
R9516	QRG01GJ-821	OMF RESISTOR	820Ω 1W J	C9601	NCJ41HK-335X-U	C CAPACITOR	3.3uF 50V K
R9517 R9518	NRSA63J-123X NRSA63D-273X	MG RESISTOR MG RESISTOR	12kΩ 1/16W J 27kΩ 1/16W D	C9603 C9604	NCB31HK-103X NCJ41CM-226X-M	C CAPACITOR C CAPACITOR	0.01uF 50V K 22uF 16V M
R9519 R9520	NRSA63J-152X NRSA63D-332X	MG RESISTOR MG RESISTOR	1.5kΩ 1/16W J 3.3kΩ 1/16W D	C9605 C9606	NCJ41CM-226X-M	C CAPACITOR C CAPACITOR	22uF 16V M
R9521	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	C9607	NCB31HK-104X NCB31HK-222X	C CAPACITOR	0.1uF 50V K 2200pF 50V K
R9525 R9526	NRSA63J-822X NRSA63J-102X	MG RESISTOR MG RESISTOR	8.2kΩ 1/16W J 1kΩ 1/16W J	C9608 C9610	NCB31HK-332X NEHM1HM-105X	C CAPACITOR E CAPACITOR	3300pF 50V K 1uF 50V M
R9527	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	C9651	NCJ41HK-335X-U	C CAPACITOR	3.3uF 50V K
R9528 R9529	QRL029J-182 QRL029J-104	OMF RESISTOR OMF RESISTOR	1.8kΩ 2W J 100kΩ 2W J	C9652 C9654	NCB31HK-103X NCJ41CM-226X-M	C CAPACITOR C CAPACITOR	0.01uF 50V K 22uF 16V M
R9531	NRS12BJ-102W	MG RESISTOR	1kΩ 1/2W J	C9655	NCJ41CM-226X-M	C CAPACITOR	22uF 16V M
R9532 R9533	NRSA63J-822X NRSA63J-102X	MG RESISTOR MG RESISTOR	8.2kΩ 1/16W J 1kΩ 1/16W J	C9656 C9657	NCB31HK-104X NDC31HJ-101X	C CAPACITOR C CAPACITOR	0.1uF 50V K 100pF 50V J
R9534	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	C9658	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
∆ L9001	QQR1708-001	CHOKE COIL		C9660 C9681	NBZ0008-107X NEHM1HM-105X	SP E CAPACITOR E CAPACITOR	100uF 1uF 50V M
L9201 L9502	QQL26AM-5R6Z QQL26AM-5R6Z	CHOKE COIL CHOKE COIL	5.6uH M 5.6uH M	C9682 C9683	NCB31EK-104X NCB31EK-104X	C CAPACITOR C CAPACITOR	0.1uF 25V K 0.1uF 25V K
L9503	QQL26AM-5R6Z	CHOKE COIL	5.6uH M	C9684	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
L9504 - ∆ T9201	NRSA02J-0R0X QAL0724-001	MG RESISTOR POWER TRANSF	0Ω 1/10W J	C9701 C9703	NCJ41EM-106X-M NCB31HK-103X	C CAPACITOR C CAPACITOR	10uF 25V M 0.01uF 50V K
△ T9501	QQS0370-001	SW TRANSF		C9704	NCJ41CM-226X-M	C CAPACITOR	22uF 16V M
△ CP9201	QMFZ052-2R0-E	FUSE	2A	C9705 C9707	NCJ41CM-226X-M NCB31HK-222X	C CAPACITOR C CAPACITOR	22uF 16V M 2200pF 50V K
△CP9501 △CP9502	QMFZ049-5R0-E QMFZ049-5R0-E	FUSE FUSE	5A 125V 5A 125V	C9751	NEHM1CM-106X	E CAPACITOR	10uF 16V M
∆CP9502 ∆CP9503	ICP-N70-T	IC PROTECTOR	5A 125V 2.5A	C9752 C9753	NCB31AK-334X NCB31AK-105X	C CAPACITOR C CAPACITOR	0.33uF 10V K 1uF 10V K

⚠Ref No.	Part No.	Part Name	Description Local	Ref No.	Part No.	Part Name	Description Local
C9754 C9802 C9803 C9804 C9805 C9806 C9808 C9809 C9851 C9852 C9901	NDC31HJ-471X NCJ41HK-335X-U NCB31HK-103X NCJ41CM-226X-M NCJ41CM-226X-M NCB31HK-104X NCB31HK-222X NCB31HK-332X NEHM1EM-336X NEHM1EM-336X NEHM1EM-336X NEHM1EM-336X	C CAPACITOR E CAPACITOR E CAPACITOR E CAPACITOR E CAPACITOR E CAPACITOR	470pF 50V J 3.3uF 50V K 0.01uF 50V K 22uF 16V M 22uF 16V M 0.1uF 50V K 2200pF 50V K 3300pF 50V K 33uF 25V M 33uF 25V M 33uF 25V M 33uF 25V M	IC6724 IC7033 IC7036 IC7038 IC7201 IC7203 IC7204 IC7205 IC7301 IC7303 IC7304 IC7305 IC7306	S-80928CLNB-G-W CD74HC4094PW-X ADC081S021CIS-X SN74LVC2G17KE-X 39VF800A7IEKD72 M12L16161A-TTG S-80928CLNB-G-W SN74LV00APW-X SDA6000-B12 K4S641632K-UC75 CD74HC4053PW-X MM1689CH-X S-80928CLNB-G-W	IC IC IC IC IC(MICRO C ROM) IC IC(DIGITAL) IC	
R9601 R9602 R9603 R9604 R9605 R9606 R9607 R9608	NRSA02J-0R0X NRSA02J-0R0X NRSA63J-562X NRVA02D-473X NRSA63D-104X NRSA63D-103X NRSA63J-682X NRSA63J-182X	MG RESISTOR MG RESISTOR MG RESISTOR CMF RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR	0Ω 1/10W J 0Ω 1/10W J 5.6kΩ 1/16W J 47kΩ 1/10W D 100kΩ 1/16W D 10kΩ 1/16W D 6.8kΩ 1/16W J 1.8kΩ 1/16W J	IC7502 IC7602 IC7606 IC9001 IC9101 IC9201 IC9301	SN74LVC2G06K-X ATF32-26DX7BJ MM1671XN-X MP2263DN-C053-X MM1662FT-X MP2263DN-C053-X MM1701CH-X	0 0 0 0 0 0 0 0	(SERVICE)
R9609 R9610 R9651 R9652 R9653 R9654 R9655 R9656 R9657 R9658 R9660 R9661 R9668 R9681 R9688 R9683 R9684 R9685 R9685 R9686 R9687 R9687	NRSA63J-183X NRSA63J-223X NRSA63J-20R0X NRSA02J-0R0X NRSA63J-103X NRSA63D-104X NRSA63D-104X NRSA63D-103X NRSA63J-182X NRSA63J-182X NRSA63J-182X NRSA63J-182X NRSA63J-104X NRSA63J-104X NRSA63J-104X NRSA63J-472X NRSA63D-472X NRSA63D-472X NRSA63D-472X NRSA63D-472X NRSA63D-472X NRSA63D-472X NRSA63D-472X NRSA63D-472X NRSA63D-472X NRSA63D-472X NRSA63D-472X NRSA63D-10R0X NRSA02J-0R0X NRSA02J-0R0X	MG RESISTOR	18kΩ 1/16W J 22kΩ 1/16W J 0Ω 1/10W J 0Ω 1/10W J 10kΩ 1/16W D 100kΩ 1/16W D 100kΩ 1/16W D 10kΩ 1/16W D 1.8kΩ 1/16W J 1.8kΩ 1/16W J 1.8kΩ 1/16W J 1.8kΩ 1/16W J 100kΩ 1/16W J 2.0Ω 1/10W J 3.3kΩ 1/2W J 4.7kΩ 1/16W D 6.8kΩ 1/16W D 6.8kΩ 1/16W D 6.8kΩ 1/16W D 1.8kΩ 1/16W D	Q6202 Q6203 Q6204 Q6205 Q6206 Q6211 Q6212 Q6213 Q6251 Q6550 Q7030 Q7032 Q7033 Q7033 Q7035 Q7201 Q7301 Q7301 Q9502 Q9503	2SA1530A/QR/-X 2SA1022/BC/-X 2SA1022/BC/-X 2SA1022/BC/-X 2SA1022/BC/-X 2SC3837K/NP/-X 2SC3837K/NP/-X 2SC3837K/NP/-X 2SC3837K/NP/-X 2SC3928A/QR/-X 2SC3928A/QR/-X UN2113-X UN2113-X UN2113-X UN2113-X UN2113-X UN2113-X UN2113-X UN2113-X UN2113-X UN2113-X UN2113-X UN2113-X UN2113-X UN2113-X UN2113-X UN2113-X UN2113-X UN2113-X UN2113-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X	TRANSISTOR DIGI TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR	
R9704 R9707 R9708 R9710 R9711 R9712 R9801 R9802 R9803 R9804 R9805 R9806 R9807	NRSA63J-103X NRSA63D-203X NRSA63D-103X NRSA63D-103X NRS181J-181X NRS181J-181X NRSA02J-0R0X NRSA63J-0R0X NRSA63J-0R0X NRSA63J-562X NRSA63D-473X NRSA63D-103X NRSA63D-103X NRSA63J-682X	MG RESISTOR	10kΩ 1/16W J 20kΩ 1/16W D 120kΩ 1/16W D 10kΩ 1/16W D 180Ω 1/8W J 180Ω 1/8W J 0Ω 1/10W J 0Ω 1/16W J 5.6kΩ 1/16W J 47kΩ 1/16W D 100kΩ 1/16W D 10kΩ 1/16W D	D6503 D7032 D7301 D9001 D9002 D9003 D9201 D9202 D9203 D9203 D9204 D9501 D9502	MA111-X 1SS355W-X RB501V-40-X EC30HA03L-X EC30HA03L-X PTZ3.9B-X EC30HA03L-X PTZ3.9B-X MA111-X MA111-X MA111-X	CHIP DIODE CHIP DIODE SB DIODE CHIP DIODE CHIP DIODE CHIP DIODE CHIP DIODE	
R9808 R9809 R9810 R9852 R9901 R9902 R9910 R9914 R9915 R9919 R9924	NRSA63J-182X NRSA63J-183X NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA63J-103X NRSA63J-183X NRSA63D-471X NRSA63D-472X NRSA63J-472X NRSA63J-0R0X	MG RESISTOR	1.8kΩ 1/16W J 18kΩ 1/16W J 0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J 10kΩ 1/16W D 470Ω 1/16W D 4.7kΩ 1/16W D 4.7kΩ 1/16W D 4.7kΩ 1/16W J 0Ω 1/16W J	C6002 C6101 C6103 C6107 C6109 C6111 C6112 C6113 C6114 C6116	NCB31CK-104X NCB30JK-225X NCB31AK-474X NCB31AK-474X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31AK-474X NCB31AK-474X NCB31AK-474X	C CAPACITOR	0.1uF 16V K 2.2uF 6.3V K 0.47uF 10V K 0.47uF 10V K 0.1uF 16V K 0.1uF 16V K 0.1uF 16V K 0.47uF 10V K 0.47uF 10V K
L9602 L9652 L9653 L9701 L9802	NQLC8CM-150X NQLC8CM-150X NQR0562-003X NQLC8CM-150X NQLC8CM-150X	COIL COIL CHOKE COIL COIL COIL	15uH M 15uH M 15uH M 15uH M	C6117 C6118 C6119 C6121 C6122 C6123 C6124 C6125	NCB30JK-225X NCB31AK-474X NCB31AK-474X NCB31AK-474X NEHL0JM-107X NCB31CK-104X NEHL0JM-107X NCB31CK-104X	C CAPACITOR C CAPACITOR C CAPACITOR C CAPACITOR E CAPACITOR C CAPACITOR E CAPACITOR C CAPACITOR C CAPACITOR	2.2uF 6.3V K 0.47uF 10V K 0.47uF 10V K 0.47uF 10V K 100uF 6.3V M 0.1uF 16V K 100uF 6.3V M 0.1uF 16V K
DIGITAI	_ P.W. BOARD	ASS'Y (SFL0D	254A-U2)	C6126 C6128	NCB30JK-225X NCB30JK-225X	C CAPACITOR C CAPACITOR	2.2uF 6.3V K 2.2uF 6.3V K
Ref No.	Part No.	Part Name	Description Local	C6130 C6132 C6133	NCB30JK-225X NEHL1EM-226X NCB31CK-154X	C CAPACITOR E CAPACITOR C CAPACITOR	2.2uF 6.3V K 22uF 25V M 0.15uF 16V K
IC6001 IC6002 IC6101 IC6102 IC6250 IC6251 IC6401 IC6402 IC6502	JCC5060 SN74LVC1G08V-X EDD1232AAFA-6B SC2595STRT-X UPC5702GS-027-X R1170H331B-X ISL98001CQZ-140 R1170H331B-X THC63LVDM83R-W	IC IC IC IC IC IC IC IC		C6134 C6135 C6139 C6217 C6218 C6236 C6237 C6238 C6239 C6241	NCB11AK-106X NCB31CK-104X NCB31CK-104X NCB31HK-104X NCB31HK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-106X	C CAPACITOR	10uF 10V K 0.1uF 16V K 0.1uF 16V K 0.1uF 50V K 0.1uF 50V K 0.1uF 50V K 0.1uF 16V K 0.1uF 16V K 0.1uF 16V K 0.1uF 16V K 1.1uF 16V K

⚠Ref No.	Part No.	Part Name	Description Local	Ref No.	Part No.	Part Name	Description Local
C6242	NCB31AK-105X	C CAPACITOR	1uF 10V K	C6603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6243	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6610	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6244	NCB31AK-105X	C CAPACITOR	1uF 10V K	C6611	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6245	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6612	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6246	NCB31AK-105X	C CAPACITOR	1uF 10V K	C6613	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6247	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6614	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6248		C CAPACITOR	1uF 10V K	C6615	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6249	NCB31AK-105X NCB31AK-105X	C CAPACITOR	1uF 10V K	C6616	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6250	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6617	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6251	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6618	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6252	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6619	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6253	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6620	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6254	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6621	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6255	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6622	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6260	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C6623	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6261	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C6624	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6262	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C6625	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6263	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C6626	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6264	NDC31HJ-100X	C CAPACITOR	10pF 50V J	C6627	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6267	NDC31HJ-100X	C CAPACITOR	10pF 50V J	C6628	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6268	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6629	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6270	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6630	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6271	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6631	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6272	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6632	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6273	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6633	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6274	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6634	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6276	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6635	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6277	NCB31CK-104X	C CAPACITOR		C6636	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6278	NCB31CK-104X	C CAPACITOR	0.1uF 16V K 0.1uF 16V K	C6637	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6279	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6638	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6280	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6639	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6282	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6640	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6283	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6641	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6284	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6642	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6285	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6643	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6286	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6644	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6288	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6645	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6289	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6646	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6290	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6656	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6291	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6657	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6293	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6658	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6294	NBZ0007-107X	SP E CAPACITOR	100uF	C6659	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6295	NBZ0007-107X	SP E CAPACITOR	100uF	C6660	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6296	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6661	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6297	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6671	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6402	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6672	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6403	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6673	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6406	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6677	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6409	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6678	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6410	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6679	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6411	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6680	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6412	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6681	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6413	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6682	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6414	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6683	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6415	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C6684	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6416	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6685	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6417	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6686	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6418	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6687	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6419	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6688	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6420	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6689	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6422	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6690	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6423	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6691	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6424	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6692	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6425	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6693	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6428	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6694	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6429	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6695	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6430	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6696	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6431	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6697	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6432	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6698	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6433	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6699	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6434	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6701	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z
C6435	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6723	NCB31HK-222X	C CAPACITOR	2200pF 50V K
C6436	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6724	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6437	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6901	NBZ0007-107X	SP E CAPACITOR	100uF
C6438	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6902	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6439	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6903	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6440	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6904	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6441	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6905	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6445	NEX60GM-337X	E CAPACITOR	330uF 4V M	C6906	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6520	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6907	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6521	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6908	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6522	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6909	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6523	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6910	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6524	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6911	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6525	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6912	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6531	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6913	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6533	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6914	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6573	NCB21CK-105X	C CAPACITOR	1uF 16V K	C6915	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6601	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6916	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6917	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
- 300=							

⚠Ref No.	Part No.	Part Name	Description Local	⚠Ref No.	Part No.	Part Name	Description Local
C6918 C6919	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K	C7502 C7506	NCB31AK-105X	C CAPACITOR C CAPACITOR	1uF 10V K
C6921	NCB11AK-106X	C CAPACITOR	10uF 10V K	C7507	NCB31HK-103X NCB31HK-103X	C CAPACITOR	0.01uF 50V K 0.01uF 50V K
C6922	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C7508	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6923	NCB11AK-106X	C CAPACITOR	10uF 10V K	C7510	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6924	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C7513	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6925	NCB11AK-106X	C CAPACITOR	10uF 10V K	C7514	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6926	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C7515	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6927	NCB11AK-106X	C CAPACITOR	10uF 10V K	C7517	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6928	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C7601	NCB11CK-105X	C CAPACITOR	1uF 16V K
C7030	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C7620	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z
C7031	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C7632	NCB31AK-224X	C CAPACITOR	0.22uF 10V K
C7033	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C9001	NDC31HJ-102X	C CAPACITOR	1000pF 50V J
C7039	NCB31HK-102X	C CAPACITOR	1000pF 50V K	C9002	NCJ41EK-106X-U	C CAPACITOR	10uF 25V K
C7040	NCB11AK-106X	C CAPACITOR	10uF 10V K	C9003	NCB31EK-104X	C CAPACITOR	0.1uF 25V K
C7044	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9004	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C7051	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9005	NCJ41CK-226X-U	C CAPACITOR	22uF 16V K
C7052	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9006	NDC31HJ-120X	C CAPACITOR	12pF 50V J
C7053	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9007	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C7054	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9010	NCJ41CK-226X-U	C CAPACITOR	22uF 16V K
C7055	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9101	NCB11CK-475X	C CAPACITOR	4.7uF 16V K
C7056	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9103	NCB11CK-225X	C CAPACITOR	2.2uF 16V K
C7057	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9201	NDC31HJ-102X	C CAPACITOR	1000pF 50V J
C7058	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9202	NCJ41EK-106X-U	C CAPACITOR	10uF 25V K
C7059	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9204	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C7060	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9205	NCJ41CK-226X-U	C CAPACITOR	22uF 16V K
C7061	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9206	NDC31HJ-120X	C CAPACITOR	12pF 50V J
C7062	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9207	NCB31HK-153X	C CAPACITOR	0.015uF 50V K
C7063	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9208	NCJ41CK-226X-U	C CAPACITOR	22uF 16V K
C7064	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9211	NCB31HK-473X	C CAPACITOR	0.047uF 50V K
C7065	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9302	NCB11CK-475X	C CAPACITOR	4.7uF 16V K
C7066	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9303	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C7067	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9304	NCB11CK-475X	C CAPACITOR	4.7uF 16V K
C7068 C7073 C7202	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K	C9306 C9501	NRSA63J-0R0X NCB31CK-105X	MG RESISTOR C CAPACITOR	0Ω 1/16W J 1uF 16V K
C7202	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9502	NCB31CK-105X	C CAPACITOR	1uF 16V K
C7203	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9611	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C7204	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9617	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C7205 C7206 C7207	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K	C9619 C9621	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z
C7207 C7208	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K	R6002	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7209	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	R6003	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7211	NCB31HK-102X	C CAPACITOR	1000pF 50V K	R6006	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7212	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R6008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7213	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R6009	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7214	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	R6014	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7215	NDC31HJ-330X	C CAPACITOR	33pF 50V J	R6017	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6018	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7301 C7302	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6019	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7303	NCB11AK-106X	C CAPACITOR	10uF 10V K	R6020	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7304	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6073	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7305	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6074	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7306	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6075	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7307	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6080	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7308	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6101	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7309	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6102	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7310	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6103	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7311	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6104	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7312	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6105	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7313	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6106	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7314	NCB11AK-106X	C CAPACITOR	10uF 10V K	R6107	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
C7315	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6108	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
C7318	NCB11AK-106X	C CAPACITOR	10uF 10V K	R6109	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7319	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6110	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7320	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6111	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7321	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6112	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7324	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6113	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7325	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6114	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7326	NDC31HJ-270X	C CAPACITOR	27pF 50V J	R6115	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7327	NDC31HJ-330X	C CAPACITOR	33pF 50V J	R6116	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7328	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6117	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7329	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6118	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7330	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6119	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7331	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6120	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7333	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6121	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7334	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6122	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7335	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6127	NRSA63J-1R5X	MG RESISTOR	1.5Ω 1/16W J
C7338	NEHM1CM-106X	E CAPACITOR	10uF 16V M	R6141	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7340	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6143	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7341	NCB11AK-106X	C CAPACITOR	10uF 10V K	R6201	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7342	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	R6202	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7343	NCB11AK-106X	C CAPACITOR	10uF 10V K	R6203	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7344	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	R6204	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7345	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	R6207	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7346	NCB11AK-106X	C CAPACITOR	10uF 10V K	R6208	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7348	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6209	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7349	NCB31HK-102X	C CAPACITOR	1000pF 50V K	R6212	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7350	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7353	NCB31EK-682X	C CAPACITOR	6800pF 25V K	R6215	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J

⚠Ref No.	Part No.	Part Name	Description Local	ÆRef No.	Part No.	Part Name	Description Loca
R6216	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R6534	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6217 R6219	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R6536 R6537	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6230	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R6538	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R6231 R6232	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R6539 R6569	NRSA63J-473X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 0Ω 1/16W J
R6233	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R6575	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6235 R6236	NRSA63J-101X NRSA63J-331X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 330Ω 1/16W J	R6576 R6595	NRSA63J-0R0X NRSA63J-682X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 6.8kΩ 1/16W J
R6238	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R6596	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R6239 R6241	NRSA63J-331X NRSA63J-101X	MG RESISTOR MG RESISTOR	330Ω 1/16W J 100Ω 1/16W J	R6599 R6602	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J
R6242	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	R6605	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R6244 R6245	NRSA63J-101X NRSA63J-331X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 330Ω 1/16W J	R6607 R6609	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J
R6248	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R6611	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R6249 R6251	NRSA63J-333X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	33kΩ 1/16W J 0Ω 1/16W J	R6707 R6712	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6252	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R6713	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6253 R6254	NRSA63J-222X NRSA63J-151X	MG RESISTOR MG RESISTOR	2.2kΩ 1/16W J 150Ω 1/16W J	R6730 R6731	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6255	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R6732	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6256 R6257	NRSA63J-0R0X NRSA63J-222X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 2.2kΩ 1/16W J	R6733 R6921	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6258	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	R6922	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6259	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R6923	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6260 R6261	NRSA63J-0R0X NRSA63J-222X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 2.2kΩ 1/16W J	R6924 R7030	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6262	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	R7031	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6263 R6264	NRSA63J-472X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 0Ω 1/16W J	R7032 R7033	NRSA63J-151X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	150Ω 1/16W J 0Ω 1/16W J
R6265	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7034	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6266 R6267	NRSA63J-221X NRSA63J-472X	MG RESISTOR MG RESISTOR	220Ω 1/16W J 4.7kΩ 1/16W J	R7035 R7036	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6268	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	R7039	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R6269 R6270	NRSA63D-242X NRSA63D-242X	MG RESISTOR MG RESISTOR	2.4kΩ 1/16W D 2.4kΩ 1/16W D	R7041 R7042	NRSA63J-473X NRSA63J-104X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 100kΩ 1/16W J
R6271	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	R7043	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6274 R6275	NRSA63J-220X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	22Ω 1/16W J 0Ω 1/16W J	R7045 R7046	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6276	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7047	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6279 R6280	NRSA63J-0R0X NRSA63J-331X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 330Ω 1/16W J	R7049 R7051	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6282	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	R7052	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6283 R6284	NRSA63J-101X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 0Ω 1/16W J	R7054 R7055	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6285	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7056	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6286 R6287	NRSA63J-391X NRSA63J-391X	MG RESISTOR MG RESISTOR	390Ω 1/16W J 390Ω 1/16W J	R7057 R7058	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6288	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	R7059	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6289 R6291	NRSA63J-102X NRSA63J-473X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 47kΩ 1/16W J	R7060 R7061	NRSA63J-154X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	150kΩ 1/16W J 0Ω 1/16W J
R6292	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7062	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6294 R6295	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7063 R7064	NRSA63J-0R0X NRSA63J-103X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J
R6296	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7065	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R6297 R6298	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7066 R7067	NRSA63J-562X NRSA63J-562X	MG RESISTOR MG RESISTOR	5.6kΩ 1/16W J 5.6kΩ 1/16W J
R6299	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	R7068	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6401 R6402	NRSA63J-473X NRSA63J-473X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 47kΩ 1/16W J	R7069 R7070	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6403	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	R7071	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6404 R6405	NRSA63J-101X NRSA63J-103X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 10kΩ 1/16W J	R7077 R7078	NRSA63J-471X NRSA63J-102X	MG RESISTOR MG RESISTOR	470Ω 1/16W J 1kΩ 1/16W J
R6408	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7081	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6409 R6410	NRSA63J-102X NRSA63J-100X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 10Ω 1/16W J	R7084 R7085	NRSA63J-221X NRSA63J-221X	MG RESISTOR MG RESISTOR	220Ω 1/16W J 220Ω 1/16W J
R6411	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	R7086	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6412 R6414	NRSA63J-103X NRSA63J-102X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 1kΩ 1/16W J	R7087 R7089	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6415	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7090	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6416 R6417	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	R7091 R7094	NRSA63J-0R0X NRSA63J-101X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 100Ω 1/16W J
R6419	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	R7095	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6421 R6423	NRSA63J-330X NRSA63J-103X	MG RESISTOR MG RESISTOR	33Ω 1/16W J 10kΩ 1/16W J	R7097 R7098	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6424	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	R7099	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6425 R6426	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7100 R7103	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6427	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7106	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6428	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7107	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J
R6503 R6521	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7109 R7110	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6522	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7112	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6523 R6524	NRSA63J-102X NRSA63J-102X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 1kΩ 1/16W J	R7113 R7119	NRSA63J-0R0X NRSA63J-102X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 1kΩ 1/16W J
R6525	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7123 R7124	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6529 R6531	NRSA63J-URUX NRSA63J-102X	MG RESISTOR	0Ω 1/16W J 1kΩ 1/16W J	R7124 R7125	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6532	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7127	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J

∆Ref No.	Part No.	Part Name	Description Local	∆Ref No.	Part No.	Part Name	Description Local
R7128	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7369	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R7131 R7157	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7371 R7372	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R7157 R7170	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7501	NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J
R7173 R7174	NRSA63J-0R0X NRSA63J-473X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 47kΩ 1/16W J	R7502 R7512	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R7175	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7513	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R7176 R7177	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7514 R7515	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R7178	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7523	NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J
R7179 R7187	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7524 R7525	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R7190	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7529	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R7191 R7192	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7530 R7532	NRSA63J-102X NRSA63J-273X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 27kΩ 1/16W J
R7201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7533	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R7202 R7203	NRSA63J-473X NRSA63J-473X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 47kΩ 1/16W J	R7544 R7601	NRSA63J-0R0X NRSA63J-103X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J
R7203 R7207 R7208	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7602	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R7208 R7211	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7634 R7635	NRSA63J-391X NRSA63J-102X	MG RESISTOR MG RESISTOR	390Ω 1/16W J 1kΩ 1/16W J
R7214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7643	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R7215 R7217	NRSA63J-473X NRSA63J-473X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 47kΩ 1/16W J	R7658 R8796	NRSA63J-103X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 0Ω 1/16W J
R7221	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R8797	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R7223 R7224	NRSA63J-473X NRSA63J-473X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 47kΩ 1/16W J	R8798 R8799	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R7225 R7229	NRSA63J-473X NRSA63J-0R0X	MG RESISTOR	47kΩ 1/16W J	R9001 R9002	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R7230	NRSA63J-472X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 4.7kΩ 1/16W J	R9003	NRSA02J-0R0X NRSA63D-273X	MG RESISTOR MG RESISTOR	0Ω 1/10W J 27kΩ 1/16W D
R7231 R7232	NRSA63J-223X NRSA63J-105X	MG RESISTOR MG RESISTOR	22kΩ 1/16W J 1MΩ 1/16W J	R9004 R9005	NRSA63J-684X NRSA63D-103X	MG RESISTOR MG RESISTOR	680kΩ 1/16W J 10kΩ 1/16W D
R7234 R7235	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R9006	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J
R7235	NRSA63J-0R0X NRSA63J-104X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 100kΩ 1/16W J	R9007 R9008	NRSA02J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/10W J 0Ω 1/16W J
R7237 R7238	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R9201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R7241 R7243	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R9202 R9203	NRSA02J-0R0X NRSA63D-302X	MG RESISTOR MG RESISTOR	0Ω 1/10W J 3kΩ 1/16W D
R7302	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R9205	NRSA63D-103X	MG RESISTOR	10kΩ 1/16W D
R7303 R7304	NRSA63J-472X NRSA63J-472X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 4.7kΩ 1/16W J	R9206 R9207	NRSA63J-332X NRSA02J-0R0X	MG RESISTOR MG RESISTOR	3.3kΩ 1/16W J 0Ω 1/10W J
R7305 R7309	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R9209	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R7309 R7310	NRSA63J-472X NRSA63J-101X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 100Ω 1/16W J	R9302 R9308	NRSA02J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/10W J 0Ω 1/16W J
R7311	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R9501	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R7312 R7313	NRSA63J-472X NRSA63J-103X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 10kΩ 1/16W J	R9502 R9503	NRSA63J-223X NRSA63J-393X	MG RESISTOR MG RESISTOR	22kΩ 1/16W J 39kΩ 1/16W J
R7314	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R9504	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R7315 R7316	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	R9505 R9506	NRSA63J-103X NRSA63J-223X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 22kΩ 1/16W J
R7317	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R9507	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R7318 R7319	NRSA63J-101X NRSA63J-103X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 10kΩ 1/16W J	R9508 R9509	NRSA63J-223X NRSA63J-103X	MG RESISTOR MG RESISTOR	22kΩ 1/16W J 10kΩ 1/16W J
R7320	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R9510	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
R7321 R7322	NRSA63J-820X NRSA63J-103X	MG RESISTOR MG RESISTOR	82Ω 1/16W J 10kΩ 1/16W J	RA6001 RA6002	NRZ0080-0R0X NRZ0034-0R0W	NET RESISTOR NET RESISTOR	0Ω 0Ω 1/32W J x4
R7323 R7324	NRSA63J-103X NRSA63J-101X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 100Ω 1/16W J	RA6007 RA6008	NRZ0080-0R0X NRZ0080-0R0X	NET RESISTOR NET RESISTOR	$\Omega\Omega$
R7325	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	RA6009	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4
R7327 R7330	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	RA6010 RA6014	NRZ0034-0R0W NRZ0034-0R0W	NET RESISTOR NET RESISTOR	0Ω 1/32W J x4 0Ω 1/32W J x4
R7332	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6101	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4
R7333 R7334	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	RA6102 RA6103	NRZ0080-220X NRZ0040-220X	NET RESISTOR NET RESISTOR	22Ω 22Ω 1/16W J x4
R7335	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6104	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4
R7337 R7339	NRSA63J-101X NRSA63J-472X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 4.7kΩ 1/16W J	RA6105 RA6106	NRZ0080-220X NRZ0040-220X	NET RESISTOR NET RESISTOR	22Ω 22Ω 1/16W J x4
R7340	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6107	NRZ0080-220X	NET RESISTOR	22Ω
R7341 R7342	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	RA6108 RA6109	NRZ0080-220X NRZ0040-470X	NET RESISTOR NET RESISTOR	22Ω 47Ω 1/16W J x4
R7343	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6110	NRZ0080-470X	NET RESISTOR	47Ω
R7346 R7347	NRSA63J-472X NRSA63J-473X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 47kΩ 1/16W J	RA6111 RA6112	NRZ0040-470X NRZ0040-470X	NET RESISTOR NET RESISTOR	47Ω 1/16W J x4 47Ω 1/16W J x4
R7348	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	RA6113	NRZ0080-470X	NET RESISTOR	47Ω
R7349 R7350	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	RA6114 RA6115	NRZ0040-470X NRZ0080-470X	NET RESISTOR NET RESISTOR	47Ω 1/16W J x4 47Ω
R7351	NRSA63J-103X NRSA63J-273X	MG RESISTOR	10kΩ 1/16W J	RA6116	NRZ0080-470X	NET RESISTOR	47Ω 22Ω
R7352 R7353	NRSA63J-273X	MG RESISTOR MG RESISTOR	27kΩ 1/16W J 27kΩ 1/16W J	RA6401 RA6402	NRZ0080-330X NRZ0080-330X	NET RESISTOR NET RESISTOR	33Ω 33Ω
R7354 R7355	NRSA63J-273X NRSA63J-101X	MG RESISTOR MG RESISTOR	27kΩ 1/16W J 100Ω 1/16W J	RA6403 RA6531	NRZ0080-330X NRZ0034-0R0W	NET RESISTOR NET RESISTOR	33Ω 0Ω 1/32W J x4
R7356	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	RA6541	NRZ0033-0R0W	NET RESISTOR	0Ω
R7358 R7359	NRSA63J-471X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	470Ω 1/16W J	RA6542 RA6543	NRZ0080-0R0X NRZ0033-0R0W	NET RESISTOR NET RESISTOR	$0\Omega \ 0\Omega$
R7363	NRSA63J-103X	MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J	RA6544	NRZ0080-0R0X	NET RESISTOR	0Ω
R7364 R7365	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	RA6545 RA6546	NRZ0033-0R0W NRZ0080-0R0X	NET RESISTOR NET RESISTOR	$\Omega\Omega$ $\Omega\Omega$
R7366	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	RA7202	NRZ0080-473X	NET RESISTOR	47kΩ
R7367 R7368	NRSA63J-221X NRSA63J-103X	MG RESISTOR MG RESISTOR	220Ω 1/16W J 10kΩ 1/16W J	RA7203 RA7204	NRZ0080-473X NRZ0080-473X	NET RESISTOR NET RESISTOR	47kΩ 47kΩ
111000	14110/1000-100/	WIG INLUIGION	10 AAO1 /1 75/101	117114	141 COUU-41 UA	THE INCOMMEN	7/ 1/22

⚠Ref No.	Part No.	Part Name	Description Local
RA7205 RA7503	NRZ0080-473X NQR0271-004X	NET RESISTOR EMI FILTER	47kΩ
L6101 L6102 L6103 L6115 L6250	NRSA02J-0R0X NQL79GM-220X NQL79GM-220X NQR0499-001X NQLB62J-120X	MG RESISTOR COIL COIL FERRITE BEADS COIL	0Ω 1/10W J 22uH M 22uH M 12uH J
L6253 L6254 L6265 L6266	NQLB62J-120X NRSA02J-0R0X NQR0499-001X NQR0499-001X	COIL MG RESISTOR FERRITE BEADS FERRITE BEADS	12uH J 0Ω 1/10W J
L6402 L6403 L6404 L6502 L6521	NQL79GM-100X NQL79GM-100X NQL79GM-100X NRSA02J-0R0X NRZ0034-0R0W	COIL COIL COIL MG RESISTOR NET RESISTOR	10uH M 10uH M 10uH M 0Ω 1/10W J 0Ω 1/32W J x4
L6522 L6523 L6531 L6701 L6911 L6912	NRZ0034-0R0W NRZ0034-0R0W NQR0199-007X NQR0413-003X NQR0499-001X NQR0499-001X	NET RESISTOR NET RESISTOR FERRITE BEADS EMI FILTER FERRITE BEADS FERRITE BEADS	0Ω 1/32W J x4 0Ω 1/32W J x4
L6922 L6923 L6924 L6925 L6931 L7301 L7302	NQL79GM-220X NQL79GM-220X NQL79GM-220X NQL79GM-220X NQR0499-001X NQR0489-002X NQR0489-002X	COIL COIL COIL COIL FERRITE BEADS FERRITE BEADS FERRITE BEADS	22uH M 22uH M 22uH M 22uH M
L7303 L7304 L7305 L7306 L7307 L7308 L7309 L7310 L7311 L7312 L7313	NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X	COIL COIL COIL COIL COIL COIL COIL COIL	4.7uH K 4.7uH K 4.7uH K 4.7uH K 4.7uH K 4.7uH K 4.7uH K 4.7uH K 4.7uH K 4.7uH K
L7314 L7315 L7316 L7501 L7502 L9001 L9201	NQR0489-002X NQL092K-4R7X NQL092K-4R7X NRSA63J-0R0X NRSA63J-0R0X NQLC8CM-150X NQLC8CM-150X	FERRITE BEADS COIL COIL MG RESISTOR MG RESISTOR COIL COIL	4.7uH K 4.7uH K 0Ω 1/16W J 0Ω 1/16W J 15uH M 15uH M
CN001 CN002 J8501 J8502 K6250 K6261 K6263 K6264	QGF0508C2-50W QGF0508C2-40W NNZ0117-001 NNZ0117-001 NRSA02J-0R0X NQR0489-002X NQR0489-002X NQR0489-002X	CONNECTOR CONNECTOR HDMI CONNECTOR HDMI CONNECTOR MG RESISTOR FERRITE BEADS FERRITE BEADS FERRITE BEADS	FFC/FPC (1-50) FFC/FPC (1-40) DIGITAL IN-1 DIGITAL IN-2 0Ω 1/10W J
K6265 K6266 K6267 K6268 K6272 K6401 K6402 K6403	NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NQR0499-001X NQR0499-001X NQR0499-001X NQR0499-001X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR FERRITE BEADS FERRITE BEADS FERRITE BEADS FERRITE BEADS	0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J
K6404 K6405 K6921 K7028 K7030 K7031	NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NQR0470-007X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR EMI FILTER	0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J 0Ω 1/16W J 0Ω 1/10W J
K7032 K7033 K7034 K7202 K7211	NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA63J-0R0X NRSA63J-0R0X NQR0499-002X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR FERRITE BEADS	$\begin{array}{c} 0\Omega \ 1/10W \ J \\ 0\Omega \ 1/16W \ J \end{array}$
K7302 K7308	NQR0389-003X NRSA02J-390X	FERRITE BEADS MG RESISTOR	39Ω 1/10W J
K7501 K7504 LC6501 LC7505 LC9301 LC9303 LC9305 LC9306 LC9307	NQR0413-002X NRSA63J-0R0X NQR0479-001X NQR0483-005X NQR0470-003X NQR0483-005X NQR0483-005X NQR0483-005X NQR0483-005X NQR0483-005X NANGRO 001Y	FERRITE BEADS MG RESISTOR EMI FILTER CMI FILTER	0Ω 1/16W J
X6250 X7001 X7309	NAX0580-001X NAX0669-001X NAX0618-001X	C RESONATOR CRYSTAL	6.000MHz

PRINTED WIRING BOARD PARTS LIST [LT-26DX7BJ/P, LT-26DX7SJ/P]

⚠Ref No.

Q7201

Q7301

Q9501

Q9502

Q9503

D6503

D7032

D7301

D9001

D9002

D9003

D9201

D9202

D9203

D9204

D9501

C6101

C6103

C6107

C6109

C6111 C6112

C6113

C6114

C6116

C6117

C6118

C6119

C6121

C6122

C6123

Part No.

UN2213-X

1SS355W-X

RB501V-40-X

EC30HA03L-X

EC30HA03L-X

EC30HA03I -X FC30HA03I -X

PTZ3.9B-X

PT73 9B-X

1SS355W-X

1SS355W-X

1SS355W-X

NCB31CK-104X

NCB30JK-225X

NCB31AK-474X

NCB31AK-474X

NCB31CK-104X

NCB31CK-104X

NCB31CK-104X

NCB31AK-474X

NCB31CK-104X

NCB31AK-474X

NCB30JK-225X

NCB31AK-474X

NCB31AK-474X

NCB31AK-474X

NEHL0JM-107X

NCB31CK-104X

2SC3928A/QR/-X

2SC2412K/QR/-X

2SC3928A/QR/-X

2SC3928A/QR/-X

Part Name

TRANSISTOR

TRANSISTOR

TRANSISTOR

CHIP DIODE

CHIP DIODE

SB DIODE

SB DIODE

SB DIODE

SB DIODE

SB DIODE

CHIP DIODE

CHIP DIODE

CHIP DIODE

C CAPACITOR C CAPACITOR

C CAPACITOR

C CAPACITOR C CAPACITOR

C CAPACITOR

C CAPACITOR

C CAPACITOR

C CAPACITOR

C CAPACITOR

C CAPACITOR

C CAPACITOR

C CAPACITOR

C CAPACITOR

E CAPACITOR

C CAPACITOR E CAPACITOR

7 DIODE

Z DIODE

CHIP TRANSISTOR

DIGI TRANSISTOR

ANALOG P.W. BOARD ASS'Y (SFL-1241A-U2)

REFER TO PARTS LIST IN PAGE 3-8 FOR THIS P.W. BOARD.

D-AMP P.W. BOARD ASS'Y (SFL-6221A-U2)

REFER TO PARTS LIST IN PAGE 3-12 FOR THIS P.W. BOARD.

SW P.W. BOARD ASS'Y (SFL-7206A-U2)

REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD.

LED P.W. BOARD ASS'Y (SFL-8703A-U2)

REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD.

POWER P.W. BOARD ASS'Y (SFL-9043A-U2)

REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD.

DC-DC P.W. BOARD ASS'Y (SFL-9143A-U2)

REFER TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD.

DIGITAL P.W. BOARD ASS'Y (LCA10599-59C) (SFL-0D254A)

(LCA10	_CA10599-59C) (SFL-0D254A)				NEHL0JM-107X NCB31CK-104X	É CAPACITOR C CAPACITOR	100uF 6.3V M 0.1uF 16V K
⚠Ref No.	Part No.	Part Name	Description Local	C6126	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K
2:31\C1 1\0.	r ait ivo.	raitivanie	Description Local	C6128	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K
-				C6130	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K
IC6001	JCC5060	IC		C6132	NEHL1EM-226X	E CAPACITOR	22uF 25V M
IC6002	SN74LVC1G08V-X	iČ		C6133	NCB31CK-154X	C CAPACITOR	0.15uF 16V K
IC6101	EDD1232AAFA-6B	iC		C6134	NCB11AK-106X	C CAPACITOR	10uF 10V K
IC6102	SC2595STRT-X	iČ		C6135	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
IC6250	UPC5702GS-027-X	IC		C6139 C6217	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
IC6251	R1170H331B-X	IC		C6217	NCB31HK-104X NCB31HK-104X	C CAPACITOR C CAPACITOR	0.1uF 50V K 0.1uF 50V K
IC6401	ISL98001CQZ-140	IC		C6236	NCB31CK-104X	C CAPACITOR	0.1uF 30V K 0.1uF 16V K
IC6402	R1170H331B-X	IC		C6237	NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K
IC6502	THC63LVDM83R-W	IC		C6238	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
IC6724	S-80928CLNB-G-W	IC		C6239	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
IC7033	CD74HC4094PW-X	IC		C6241	NCB11AK-106X	C CAPACITOR	10uF 10V K
IC7036	ADC081S021CIS-X	IC		C6242	NCB31AK-105X	C CAPACITOR	1uF 10V K
IC7038	SN74LVC2G17KE-X	IC		C6243	NCB11AK-106X	C CAPACITOR	10uF 10V K
IC7201 IC7203	39VF800A7IEKD72	IC(MICRO C ROM)		C6244	NCB31AK-105X	C CAPACITOR	1uF 10V K
IC7203 IC7204	M12L16161A-7TG	IC		C6245	NCB11AK-106X	C CAPACITOR	10uF 10V K
IC7204 IC7205	S-80928CLNB-G-W SN74LV00APW-X	IC IC		C6246	NCB31AK-105X	C CAPACITOR	1uF 10V K
IC7203	SDA6000-B12	IC IC		C6247	NCB11AK-106X	C CAPACITOR	10uF 10V K
IC7301	K4S641632H-UC75	IC IC		C6248	NCB31AK-105X	C CAPACITOR	1uF 10V K
IC7303	CD74HC4053PW-X	IC		C6249	NCB31AK-105X	C CAPACITOR	1uF 10V K
IC7305	MM1689CH-X	IC		C6250	NCB11AK-106X	C CAPACITOR	10uF 10V K
IC7306	S-80928CLNB-G-W	iC		C6251	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
IC7502	SN74LVC2G06K-X	iC		C6252	NCB11AK-106X	C CAPACITOR	10uF 10V K
IC7602	ATF32-26DX7BJ	IC	(SERVICE)	C6253	NCB11AK-106X	C CAPACITOR	10uF 10V K
IC7606	MM1671XN-X	IC	(/	C6254 C6255	NCB11AK-106X NCB11AK-106X	C CAPACITOR C CAPACITOR	10uF 10V K 10uF 10V K
IC9001	MP2263DN-C053-X	IC		C6260	NCB21AK-100X	C CAPACITOR	2.2uF 10V K
IC9101	MM1662FT-X	IC		C6261	NCB21AK-225X NCB21AK-225X	C CAPACITOR	2.2uF 10V K 2.2uF 10V K
IC9201	MP2263DN-C053-X	IC		C6262	NCB21AK-225X	C CAPACITOR	2.2uF 10V K
IC9301	MM1701CH-X	IC		C6263	NCB21AK-225X	C CAPACITOR	2.2uF 10V K
				C6264	NDC31HJ-100X	C CAPACITOR	10pF 50V J
Q6202	2SA1530A/QR/-X	TRANSISTOR		C6267	NDC31HJ-100X	C CAPACITOR	10pF 50V J
Q6203	2SA1022/BC/-X	TRANSISTOR		C6268	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q6204 Q6205	2SA1022/BC/-X 2SA1022/BC/-X	TRANSISTOR TRANSISTOR		C6270	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q6205 Q6206	2SA1022/BC/-X 2SA1022/BC/-X	TRANSISTOR		C6271	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q6200 Q6211	2SC3837K/NP/-X	TRANSISTOR		C6272	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q6212	2SC3837K/NP/-X	TRANSISTOR		C6273	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q6213	2SC3837K/NP/-X	TRANSISTOR		C6274	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q6214	2SC3837K/NP/-X	TRANSISTOR		C6276	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q6250	2SC3928A/QR/-X	TRANSISTOR		C6277	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q6251	2SC3928A/QR/-X	TRANSISTOR		C6278 C6279	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q6501	2SC3928A/QR/-X	TRANSISTOR			NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q7030	UN2213-X	DIGI TRANSISTOR		C6280 C6282	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K
Q7032	UN2113-X	DIGI TRANSISTOR		C6283	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K
Q7033	UN2113-X	DIGI TRANSISTOR		C6284	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K
Q7034	UN2113-X	DIGI TRANSISTOR		C6285	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q7035	UN2113-X	DIGI TRANSISTOR		00200	110001011-1047	o oni noi i or	0.1ui 10V K

Description Local

0.1uF 16V K

2.2uF 6.3V K 0.47uF 10V K 0.47uF 10V K 0.1uF 16V K

0.1uF 16V K

0.1uF 16V K

0.1uF 16V K

0.47uF 10V K

2.2uF 6.3V K

0.47uF 10V K 0.47uF 10V K

0.47uF 10V K

100uF 6.3V M

100uF 6.3V M

0.1uF 16V K

0.47uF 10V K

⚠Ref No.	Part No.	Part Name	Description Local	Ref No.	Part No.	Part Name	Description Local
C6286	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6644	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6288	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6645	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6289	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6646	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6290	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6656	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6291	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6657	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6293	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6658	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6294	NBZ0007-107X	SP E CAPACITOR	100uF	C6659	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6295	NBZ0007-107X	SP E CAPACITOR	100uF	C6660	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6296	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6661	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6297	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6671	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6402	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6672	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6403	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6673	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6406	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6677	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6409	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6678	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6410	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6679	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6411	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6680	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6412	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6681	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6413	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6682	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6414	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6683	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6415	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C6684	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6416	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6685	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6417	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6686	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6418	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6687	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6419	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6688	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6420 C6422	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6689	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6422	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6690	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6423	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6691	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6424	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6692	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6425	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6693	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6428	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6694	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6429	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6695	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6430	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6696	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6431	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6697	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6432 C6433 C6434	NCB11AK-106X NCF31CZ-104X	C CAPACITOR C CAPACITOR	10uF 10V K 0.1uF 16V Z	C6698 C6699	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z
C6434	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6701	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z
C6435	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6723	NCB31HK-222X	C CAPACITOR	2200pF 50V K
C6436	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6724	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6437 C6438	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6901	NBZ0007-107X	SP E CAPACITOR	100uF
C6439	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6902	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6903	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6440	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6904	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6441	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6905	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6445	NEX60GM-337X	E CAPACITOR	330uF 4V M	C6906	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6520	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6907	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6521	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6908	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6522	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6909	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6523	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6910	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6524	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6911	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6525	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6912	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6531	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6913	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6533	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6914	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6573	NCB21CK-105X	C CAPACITOR	1uF 16V K	C6915	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6601	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6916	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6602	NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K	C6917 C6918	NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K
C6603 C6610	NCB31CK-104X NCF31CZ-104X	C CAPACITOR	0.1uF 16V K 0.1uF 16V Z	C6919	NCB31CK-104X NCB31CK-104X	C CAPACITOR	0.1uF 16V K 0.1uF 16V K
C6611	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6921	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6612	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6922	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6613	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6923	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6614	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6924	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6615	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6925	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6616	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6926	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6617	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6927	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6618	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6928	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6619	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7030	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6620	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7031	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6621	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7033	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6622	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7039	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C6623	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7040	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6624	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7044	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6625	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7051	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6626	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7052	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6627	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7053	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6628	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7054	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6629	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7055	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6630	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7056	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6631	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7057	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6632	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7058	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6633	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7059	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6634	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7060	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6635	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7061	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6636	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7062	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6637	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7063	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6638	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7064	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6639	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7065	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6640 C6641	NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z	C7066	NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K
C6642	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	C7067 C7068	NCB31CK-104X NCB31CK-104X	C CAPACITOR	0.1uF 16V K 0.1uF 16V K
C6643	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7073	NCB31CK-104X	C CAPACITOR	0.1uF 16V K

ÆRef No.	Part No.	Part Name	Description Local	ÆRef No.	Part No.	Part Name	Description Local
C7202	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9502	NCB31CK-105X	C CAPACITOR	1uF 16V K
C7203 C7204	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K	C9611 C9617	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z
C7204 C7205	NCB31CK-104X NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9619	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C7206 C7207	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K	C9621	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C7208	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	R6002	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7209 C7211	NCB31CK-104X NCB31HK-102X	C CAPACITOR C CAPACITOR	0.1uF 16V K 1000pF 50V K	R6003 R6006	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C7212 C7213	NCB31HK-104X	C CAPACITOR C CAPACITOR	0.1uF 50V K	R6008 R6009	NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J
C7214	NCB31HK-104X NDC31HJ-102X	C CAPACITOR C CAPACITOR	0.1uF 50V K 1000pF 50V J	R6014	NRSA63J-220X NRSA63J-0R0X	MG RESISTOR	22Ω 1/16W J 0Ω 1/16W J
C7215 C7301	NDC31HJ-330X NCF31CZ-104X	C CAPACITOR C CAPACITOR	33pF 50V J 0.1uF 16V Z	R6017 R6018	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C7302	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6019	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7303 C7304	NCB11AK-106X NCF31CZ-104X	C CAPACITOR C CAPACITOR	10uF 10V K 0.1uF 16V Z	R6020 R6073	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C7305	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6074	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7306 C7307	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	R6075 R6080	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C7308	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6101	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7309 C7310	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	R6102 R6103	NRSA63J-220X NRSA63J-220X	MG RESISTOR MG RESISTOR	22Ω 1/16W J 22Ω 1/16W J
C7311	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6104	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7312 C7313	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	R6105 R6106	NRSA63J-220X NRSA63J-220X	MG RESISTOR MG RESISTOR	22Ω 1/16W J 22Ω 1/16W J
C7314	NCB11AK-106X NCF31CZ-104X	C CAPACITOR	10uF 10V K 0.1uF 16V Z	R6107 R6108	NRSA63J-100X NRSA63J-100X	MG RESISTOR	10Ω 1/16W J 10Ω 1/16W J
C7315 C7318	NCB11AK-106X	C CAPACITOR C CAPACITOR	10uF 10V K	R6109	NRSA63J-220X	MG RESISTOR MG RESISTOR	22Ω 1/16W J
C7319 C7320	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	R6110 R6111	NRSA63J-220X NRSA63J-220X	MG RESISTOR MG RESISTOR	22Ω 1/16W J 22Ω 1/16W J
C7321	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6112	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7324 C7325	NCF31CZ-104X NCB31HK-103X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.01uF 50V K	R6113 R6114	NRSA63J-470X NRSA63J-470X	MG RESISTOR MG RESISTOR	47Ω 1/16W J 47Ω 1/16W J
C7326 C7327	NDC31HJ-270X	C CAPACITOR	27pF 50V J	R6115	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7327 C7328	NDC31HJ-330X NCF31CZ-104X	C CAPACITOR C CAPACITOR	33pF 50V J 0.1uF 16V Z	R6116 R6117	NRSA63J-470X NRSA63J-470X	MG RESISTOR MG RESISTOR	47Ω 1/16W J 47Ω 1/16W J
C7329	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6118	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7330 C7331	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	R6119 R6120	NRSA63J-470X NRSA63J-470X	MG RESISTOR MG RESISTOR	47Ω 1/16W J 47Ω 1/16W J
C7331 C7333	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6121	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7334 C7335	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	R6122 R6127	NRSA63J-470X NRSA63J-1R5X	MG RESISTOR MG RESISTOR	47Ω 1/16W J 1.5Ω 1/16W J
C7338 C7340	NEHM1CM-106X NCB31HK-103X	E CAPACITOR C CAPACITOR	10uF 16V M 0.01uF 50V K	R6141 R6143	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C7341	NCB11AK-106X	C CAPACITOR	10uF 10V K	R6201	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7342 C7343	NCB30JK-225X NCB11AK-106X	C CAPACITOR C CAPACITOR	2.2uF 6.3V K 10uF 10V K	R6202 R6203	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C7344 C7345	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	R6204	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7345 C7346	NCB30JK-225X NCB11AK-106X	C CAPACITOR C CAPACITOR	2.2uF 6.3V K 10uF 10V K	R6207 R6208	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C7348	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6209	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7349 C7350	NCB31HK-102X NCF31CZ-104X	C CAPACITOR C CAPACITOR	1000pF 50V K 0.1uF 16V Z	R6212 R6214	NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C7353 C7502	NCB31EK-682X NCB31AK-105X	C CAPACITOR C CAPACITOR	6800pF 25V K 1uF 10V K	R6215 R6216	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C7506	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6217	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7507 C7508	NCB31HK-103X NCB31HK-103X	C CAPACITOR C CAPACITOR	0.01uF 50V K 0.01uF 50V K	R6219 R6230	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C7510	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6231	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7513 C7514	NCB31CK-104X NCB31HK-103X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.01uF 50V K	R6232 R6233	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C7515 C7517	NCB31HK-103X NCB31HK-103X	C CAPACITOR C CAPACITOR	0.01uF 50V K 0.01uF 50V K	R6235 R6236	NRSA63J-101X NRSA63J-331X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 330Ω 1/16W J
C7601	NCB11CK-105X	C CAPACITOR	1uF 16V K	R6238	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C7620 C7632	NCF11CZ-475X NCB31AK-224X	C CAPACITOR C CAPACITOR	4.7uF 16V Z 0.22uF 10V K	R6239 R6241	NRSA63J-331X NRSA63J-101X	MG RESISTOR MG RESISTOR	330Ω 1/16W J 100Ω 1/16W J
C9001	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	R6242	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C9002 C9003	NCJ41EK-106X-U NCB31EK-104X	C CAPACITOR C CAPACITOR	10uF 25V K 0.1uF 25V K	R6244 R6245	NRSA63J-101X NRSA63J-331X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 330Ω 1/16W J
C9004	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6248	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
C9005 C9006	NCJ41CK-226X-U NDC31HJ-120X	C CAPACITOR C CAPACITOR	22uF 16V K 12pF 50V J	R6249 R6251	NRSA63J-333X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	33kΩ 1/16W J 0Ω 1/16W J
C9007 C9010	NCB31HK-103X	C CAPACITOR C CAPACITOR	0.01uF 50V K	R6252 R6253	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C9010 C9101	NCJ41CK-226X-U NCB11CK-475X	C CAPACITOR C CAPACITOR	22uF 16V K 4.7uF 16V K	R6254	NRSA63J-222X NRSA63J-151X	MG RESISTOR MG RESISTOR	2.2kΩ 1/16W J 150Ω 1/16W J
C9103 C9201	NCB11CK-225X NDC31HJ-102X	C CAPACITOR C CAPACITOR	2.2uF 16V K 1000pF 50V J	R6255 R6256	NRSA63J-472X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 0Ω 1/16W J
C9202	NCJ41EK-106X-U	C CAPACITOR	10uF 25V K	R6257	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C9204 C9205	NCB31HK-103X NCJ41CK-226X-U	C CAPACITOR C CAPACITOR	0.01uF 50V K 22uF 16V K	R6258 R6259	NRSA63J-151X NRSA63J-472X	MG RESISTOR MG RESISTOR	150Ω 1/16W J 4.7kΩ 1/16W J
C9206	NDC31HJ-120X	C CAPACITOR	12pF 50V J	R6260	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C9207 C9208	NCB31HK-153X NCJ41CK-226X-U	C CAPACITOR C CAPACITOR	0.015uF 50V K 22uF 16V K	R6261 R6262	NRSA63J-222X NRSA63J-151X	MG RESISTOR MG RESISTOR	2.2kΩ 1/16W J 150Ω 1/16W J
C9211	NCB31HK-473X	C CAPACITOR	0.047uF 50V K	R6263	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C9302 C9303	NCB11CK-475X NCB31HK-103X	C CAPACITOR C CAPACITOR	4.7uF 16V K 0.01uF 50V K	R6264 R6265	NRSA63J-0R0X NRSA63J-103X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J
C9304	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	R6266	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C9306 C9501	NRSA63J-0R0X NCB31CK-105X	MG RESISTOR C CAPACITOR	0Ω 1/16W J 1uF 16V K	R6267 R6268	NRSA63J-472X NRSA63D-242X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 2.4kΩ 1/16W D

⚠Ref No.	Part No.	Part Name	Description Local	⚠Ref No.	Part No.	Part Name	Description Loca
R6269	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	R7041	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6270 R6271	NRSA63D-242X NRSA63D-242X	MG RESISTOR MG RESISTOR	2.4kΩ 1/16W D 2.4kΩ 1/16W D	R7042 R7043	NRSA63J-104X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	100kΩ 1/16W J 0Ω 1/16W J
R6274	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	R7045	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6275 R6276	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7046 R7047	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6279	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7049	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6280 R6282	NRSA63J-331X NRSA63J-331X	MG RESISTOR MG RESISTOR	330Ω 1/16W J 330Ω 1/16W J	R7051 R7052	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6283	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7054	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6284 R6285	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7055 R7056	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6286	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	R7057	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6287 R6288	NRSA63J-391X NRSA63J-391X	MG RESISTOR MG RESISTOR	390Ω 1/16W J 390Ω 1/16W J	R7058 R7059	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6289	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7060	NRSA63J-154X	MG RESISTOR	150kΩ 1/16W J
R6291 R6292	NRSA63J-473X NRSA63J-473X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 47kΩ 1/16W J	R7061 R7062	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6294	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7063	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6295 R6296	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7064 R7065	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J
R6297	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7066	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
R6298 R6299	NRSA63J-0R0X NRSA63J-220X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 22Ω 1/16W J	R7067 R7068	NRSA63J-562X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	5.6kΩ 1/16W J 0Ω 1/16W J
R6401	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7069	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6402 R6403	NRSA63J-473X NRSA63J-471X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 470Ω 1/16W J	R7070 R7071	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6404	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7077	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R6405 R6408	NRSA63J-103X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 0Ω 1/16W J	R7078 R7081	NRSA63J-102X NRSA63J-473X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 47kΩ 1/16W J
R6409	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7084	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R6410 R6411	NRSA63J-100X NRSA63J-100X	MG RESISTOR MG RESISTOR	10Ω 1/16W J 10Ω 1/16W J	R7085 R7086	NRSA63J-221X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	220Ω 1/16W J 0Ω 1/16W J
R6412	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7087	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6414 R6415	NRSA63J-102X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 0Ω 1/16W J	R7089 R7090	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6416	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7091	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6417 R6419	NRSA63J-101X NRSA63J-330X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 33Ω 1/16W J	R7094 R7095	NRSA63J-101X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 0Ω 1/16W J
R6421	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	R7097	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6423 R6424	NRSA63J-103X NRSA63J-330X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 33Ω 1/16W J	R7098 R7099	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6425	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7100	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6426 R6427	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7103 R7106	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6428	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7107	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6503 R6521	NRSA63J-0R0X NRSA63J-101X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 100Ω 1/16W J	R7109 R7110	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6522	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7112	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6523 R6524	NRSA63J-102X NRSA63J-102X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 1kΩ 1/16W J	R7113 R7119	NRSA63J-0R0X NRSA63J-102X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 1kΩ 1/16W J
R6525	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7123	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6529 R6531	NRSA63J-0R0X NRSA63J-102X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 1kΩ 1/16W J	R7124 R7125	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6532	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7127	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6534 R6536	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7128 R7131	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6537	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7157	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6538 R6539	NRSA63J-103X NRSA63J-473X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 47kΩ 1/16W J	R7170 R7173	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6569	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7174	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6575 R6576	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7175 R7176	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6595	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R7177	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6596 R6599	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	R7178 R7179	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6602	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7187	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6605 R6607	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	R7190 R7191	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6609	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7192	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6611 R6707	NRSA63J-102X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 0Ω 1/16W J	R7201 R7202	NRSA63J-473X NRSA63J-473X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 47kΩ 1/16W J
R6712	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7203	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6713 R6730	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7207 R7208	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6731	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7211	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6732 R6733	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7214 R7215	NRSA63J-0R0X NRSA63J-473X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 47kΩ 1/16W J
R6921	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7217	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6922 R6923	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7221 R7223	NRSA63J-0R0X NRSA63J-473X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 47kΩ 1/16W J
R6924	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7224	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R7030 R7031	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7225 R7229	NRSA63J-473X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 0Ω 1/16W J
R7032	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	R7230	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R7033 R7034	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7231 R7232	NRSA63J-223X NRSA63J-105X	MG RESISTOR MG RESISTOR	22kΩ 1/16W J 1MΩ 1/16W J
R7035	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7234	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
R7036 R7039	NRSA63J-0R0X NRSA63J-102X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 1kΩ 1/16W J	R7235 R7237	NRSA63J-0R0X NRSA63J-104X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 100kΩ 1/16W J
111 000	111 W/1000-104/	WIG INLUIGION	11/22 1/ 1044 A	131231	11110/1000-104/	MO NEGIOTON	100K22 1/10VV J

∆Ref No.	Part No.	Part Name	Description Local	∆Ref No.	Part No.	Part Name	Description Local
R7238	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R9201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R7241 R7243	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R9202 R9203	NRSA02J-0R0X NRSA63D-302X	MG RESISTOR MG RESISTOR	0Ω 1/10W J 3kΩ 1/16W D
R7243 R7302 R7303	NRSA63J-472X NRSA63J-472X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 4.7kΩ 1/16W J	R9205 R9206	NRSA63D-103X NRSA63J-332X	MG RESISTOR MG RESISTOR	10kΩ 1/16W D 3.3kΩ 1/16W J
R7304	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R9207	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
R7305 R7309	NRSA63J-472X NRSA63J-472X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 4.7kΩ 1/16W J	R9209 R9302	NRSA63J-0R0X NRSA02J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/10W J
R7310	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R9308	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R7311 R7312	NRSA63J-472X NRSA63J-472X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 4.7kΩ 1/16W J	R9501 R9502	NRSA63J-472X NRSA63J-223X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 22kΩ 1/16W J
R7313	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R9503	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J
R7314 R7315	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	R9504 R9505	NRSA63J-223X NRSA63J-103X	MG RESISTOR MG RESISTOR	22kΩ 1/16W J 10kΩ 1/16W J
R7316 R7317	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	R9506 R9507	NRSA63J-223X NRSA63J-103X	MG RESISTOR MG RESISTOR	22kΩ 1/16W J 10kΩ 1/16W J
R7318	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R9508	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R7319 R7320	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	R9509 R9510	NRSA63J-103X NRSA63J-104X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 100kΩ 1/16W J
R7321	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J	RA6001	NRZ0080-0R0X	NET RESISTOR	0Ω
R7322 R7323	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	RA6002 RA6007	NRZ0034-0R0W NRZ0080-0R0X	NET RESISTOR NET RESISTOR	0Ω 1/32W J x4 0Ω
R7324 R7325	NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J	RA6008 RA6009	NRZ0080-0R0X NRZ0034-0R0W	NET RESISTOR	0Ω 0Ω 1/32W J x4
R7327	NRSA63J-220X NRSA63J-103X	MG RESISTOR	22Ω 1/16W J 10kΩ 1/16W J	RA6010	NRZ0034-0R0W NRZ0034-0R0W	NET RESISTOR NET RESISTOR	0Ω 1/32W J x4
R7330 R7332	NRSA63J-103X NRSA63J-101X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 100Ω 1/16W J	RA6014 RA6101	NRZ0034-0R0W NRZ0040-220X	NET RESISTOR NET RESISTOR	0Ω 1/32W J x4 22Ω 1/16W J x4
R7333	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6102	NRZ0080-220X	NET RESISTOR	22Ω
R7334 R7335	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	RA6103 RA6104	NRZ0040-220X NRZ0040-220X	NET RESISTOR NET RESISTOR	22Ω 1/16W J x4 22Ω 1/16W J x4
R7337	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6105	NRZ0080-220X	NET RESISTOR	22Ω
R7339 R7340	NRSA63J-472X NRSA63J-101X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 100Ω 1/16W J	RA6106 RA6107	NRZ0040-220X NRZ0080-220X	NET RESISTOR NET RESISTOR	22Ω 1/16W J x4 22Ω
R7340 R7341	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6108	NRZ0080-220X	NET RESISTOR	22Ω
R7342 R7343	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	RA6109 RA6110	NRZ0040-470X NRZ0080-470X	NET RESISTOR NET RESISTOR	47Ω 1/16W J x4 47Ω
R7346	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	RA6111	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4
R7347 R7348	NRSA63J-473X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 0Ω 1/16W J	RA6112 RA6113	NRZ0040-470X NRZ0080-470X	NET RESISTOR NET RESISTOR	47Ω 1/16W J x4 47Ω
R7349 R7350	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	RA6114 RA6115	NRZ0040-470X	NET RESISTOR NET RESISTOR	47Ω 1/16W J x4 47Ω
R7351	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	RA6116	NRZ0080-470X NRZ0080-470X	NET RESISTOR	47Ω
R7352 R7353	NRSA63J-273X NRSA63J-273X	MG RESISTOR MG RESISTOR	27kΩ 1/16W J 27kΩ 1/16W J	RA6401 RA6402	NRZ0080-330X NRZ0080-330X	NET RESISTOR NET RESISTOR	33Ω 33Ω
R7354	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	RA6403	NRZ0080-330X	NET RESISTOR	33Ω
R7355 R7356	NRSA63J-101X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 0Ω 1/16W J	RA6531 RA6541	NRZ0034-0R0W NRZ0033-0R0W	NET RESISTOR NET RESISTOR	0Ω 1/32W J x4 0Ω
R7358	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	RA6542	NRZ0080-0R0X	NET RESISTOR	$\Omega\Omega$
R7359 R7363	NRSA63J-0R0X NRSA63J-103X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J	RA6543 RA6544	NRZ0033-0R0W NRZ0080-0R0X	NET RESISTOR NET RESISTOR	$0\Omega \ 0\Omega$
R7364	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	RA6545	NRZ0033-0R0W	NET RESISTOR	$0\Omega \ 0\Omega$
R7365 R7366	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	RA6546 RA7202	NRZ0080-0R0X NRZ0080-473X	NET RESISTOR NET RESISTOR	0Ω 47kΩ
R7367 R7368	NRSA63J-221X NRSA63J-103X	MG RESISTOR	220Ω 1/16W J	RA7203 RA7204	NRZ0080-473X	NET RESISTOR	47kΩ 47kΩ
R7369	NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	RA7205	NRZ0080-473X NRZ0080-473X	NET RESISTOR NET RESISTOR	47kΩ
R7371 R7372	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	RA7503	NQR0271-004X	EMI FILTER	
R7501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6101	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
R7502 R7512	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6102 L6103	NQL79GM-220X NQL79GM-220X	COIL COIL	22uH M 22uH M
R7513	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6115	NQR0499-001X	FERRITE BEADS	
R7514 R7515	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6250 L6253	NQLB62J-120X NQLB62J-120X	COIL COIL	12uH J 12uH J
R7523 R7524	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6254 L6265	NRSA02J-0R0X NQR0499-001X	MG RESISTOR FERRITE BEADS	0Ω 1/10W J
R7525	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6266	NQR0499-001X	FERRITE BEADS	
R7529 R7530	NRSA63J-103X NRSA63J-102X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 1kΩ 1/16W J	L6402 L6403	NQL79GM-100X NQL79GM-100X	COIL COIL	10uH M 10uH M
R7532	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	L6404	NQL79GM-100X	COIL	10uH M
R7533 R7544	NRSA63J-221X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	220Ω 1/16W J 0Ω 1/16W J	L6502 L6521	NRSA02J-0R0X NRZ0034-0R0W	MG RESISTOR NET RESISTOR	0Ω 1/10W J 0Ω 1/32W J x4
R7601	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	L6522	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4
R7602 R7634	NRSA63J-103X NRSA63J-391X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 390Ω 1/16W J	L6523 L6531	NRZ0034-0R0W NQR0199-007X	NET RESISTOR FERRITE BEADS	0Ω 1/32W J x4
R7635 R7643	NRSA63J-102X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 0Ω 1/16W J	L6701 L6911	NQR0413-003X NQR0499-001X	EMI FILTER FERRITE BEADS	
R7658	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	L6912	NQR0499-001X	FERRITE BEADS	
R8796 R8797	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6922 L6923	NQL79GM-220X NQL79GM-220X	COIL COIL	22uH M 22uH M
R8798	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6924	NQL79GM-220X	COIL	22uH M
R8799 R9001	NRSA63J-0R0X NRSA63J-473X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 47kΩ 1/16W J	L6925 L6931	NQL79GM-220X NQR0499-001X	COIL FERRITE BEADS	22uH M
R9002	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	L7301	NQR0489-002X	FERRITE BEADS	
R9003 R9004	NRSA63D-273X NRSA63J-684X	MG RESISTOR MG RESISTOR	27kΩ 1/16W D 680kΩ 1/16W J	L7302 L7303	NQR0489-002X NQL092K-4R7X	FERRITE BEADS COIL	4.7uH K
R9005	NRSA63D-103X	MG RESISTOR	10kΩ 1/16W D	L7304	NQL092K-4R7X	COIL	4.7uH K
R9006 R9007	NRSA63J-512X NRSA02J-0R0X	MG RESISTOR MG RESISTOR	5.1kΩ 1/16W J 0Ω 1/10W J	L7305 L7306	NQL092K-4R7X NQL092K-4R7X	COIL COIL	4.7uH K 4.7uH K
R9008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L7307	NQL092K-4R7X	COIL	4.7uH K

ÆRef No.	Part No.	Part Name	Description Loca
L7308 L7309 L7310 L7311 L7312 L7313 L7314 L7315 L7316 L7501	NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQR0489-002X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NRSA63J-0R0X	COIL COIL COIL COIL COIL COIL FERRITE BEADS COIL COIL MG RESISTOR	4.7uH K 4.7uH K 4.7uH K 4.7uH K 4.7uH K 4.7uH K 4.7uH K 4.7uH K 0Ω 1/16W J
L7502 L9001 L9201	NRSA63J-0R0X NQLC8CM-150X NQLC8CM-150X	MG RESISTOR COIL COIL	0Ω 1/16W J 15uH M 15uH M
CN001 CN002 J8501 J8502 K6250 K6261 K6263 K6264	QGF0508C2-50W QGF0508C2-40W NNZ0117-001 NNZ0117-001 NRSA02J-0R0X NQR0489-002X NQR0489-002X NQR0489-002X	CONNECTOR CONNECTOR HDMI CONNECTOR HDMI CONNECTOR MG RESISTOR FERRITE BEADS FERRITE BEADS FERRITE BEADS	FFC/FPC (1-50) FFC/FPC (1-40) DIGITAL IN-1 DIGITAL IN-2 0Ω 1/10W J
K6265 K6266 K6267 K6268 K6272 K6401 K6402 K6403	NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NQR0499-001X NQR0499-001X NQR0499-001X NQR0499-001X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR FERRITE BEADS FERRITE BEADS FERRITE BEADS FERRITE BEADS	0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J
K6404 K6405 K6921 K7028 K7030 K7031	NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA63J-0R0X NRSA02J-0R0X NQR0470-007X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR EMI FILTER	0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J 0Ω 1/16W J 0Ω 1/16W J
K7032 K7033 K7034 K7202 K7211 K7302	NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA63J-0R0X NQR0499-002X NQR0389-003X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR FERRITE BEADS FERRITE BEADS	0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J 0Ω 1/16W J
K7308 K7501 K7504 LC6501 LC7505 LC9301 LC9303 LC9305 LC9306 LC9307 X6250	NRSA02J-390X NQR0413-002X NRSA63J-0R0X NQR0479-001X NQR0483-005X NQR0470-003X NQR0483-005X NQR0483-005X NQR0483-005X NQR0483-005X NQR0483-005X NQX0580-001X	MG RESISTOR FERRITE BEADS MG RESISTOR EMI FILTER CMI FILTER EMI FICHER EMI FICHER	39Ω 1/10W J 0Ω 1/16W J
X7001 X7309	NAX0669-001X NAX0618-001X	C RESONATOR CRYSTAL	6.000MHz

PRINTED WIRING BOARD PARTS LIST [LT-26X70BU, LT-26X70SU]

ANALO	OG P.W. BOARI	O ASS'Y (SFL-12	42A-U2)	⚠Ref No.	Part No.	Part Name	Description Local
△Ref No.	Part No.	Part Name	Description Local		UDZS10B-X	Z DIODE	
				D444 D445	UDZS10B-X UDZS10B-X	Z DIODE Z DIODE	
IC101	R2S11004FT	IC		D446	UDZS10B-X	Z DIODE	
IC102 IC104	R2S11003FT MM1510XN-X	IC IC		D447 D461	UDZS10B-X UDZS10B-X	Z DIODE Z DIODE	
IC105	MM1510XN-X	IC		D462	UDZS10B-X	Z DIODE	
IC381	M62320FP-X	IC		D463	UDZS10B-X	Z DIODE	
IC501 IC502	HA17558AF-X AK4554VT-X	IC IC		D464 D465	UDZS10B-X UDZS10B-X	Z DIODE Z DIODE	
IC541	SN74LC1G3157K-X	IC		D466	UDZS10B-X	Z DIODE	
IC551	JCC5067	IC		D467	UDZS10B-X	Z DIODE	
IC552 IC601	PQ2L3152MS-X NJW1182FP1	IC IC		D468 D469	UDZS10B-X UDZS10B-X	Z DIODE Z DIODE	
IC606	M62320FP-X	IC		D491	UDZW3.3B-X	Z DIODE	
IC661	MX3000CS-X	IC		D492	S9648	PHOTO CONDUCTOR	
IC751 IC902	BH3547F-X BA33BC0FP-X	IC IC		D501 D502	1SS355W-X 1SS355W-X	CHIP DIODE CHIP DIODE	
IC3501	MSP3415GQGB8V3I	M IC		D503	MA8033-X	Z DIODE	
IC3504	BA80BC0FP-X	IC		D605 D606	1SS355W-X 1SS355W-X	CHIP DIODE CHIP DIODE	
Q106	2SK1374-X	MOS FET		D607	1SS355W-X 1SS355W-X	CHIP DIODE	
Q107	2SK1374-X	MOS FET		D608	1SS355W-X	CHIP DIODE	
Q109 Q110	2SA1022/BC/-X 2SA1022/BC/-X	TRANSISTOR TRANSISTOR		D615 D621	1SS355-X 1SS355W-X	SI DIODE CHIP DIODE	
Q111	2SA1022/BC/-X	TRANSISTOR		D622	1SS355W-X	CHIP DIODE	
Q112	2SA1022/BC/-X	TRANSISTOR		D751	1SS355W-X	CHIP DIODE	
Q113 Q281	2SC1623A/5-6/-X 2SA812A/5-6/-X	SI TRANSISTOR SI TRANSISTOR		D752	1SS355W-X	CHIP DIODE	
Q431	UN2226-X	DIGI TRANSISTOR		C106	NCB11CK-475X	C CAPACITOR	4.7uF 16V K
Q432	UN2226-X	DIGI TRANSISTOR		C107	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q433 Q434	UN2110-X UN2226-X	DIGI TRANSISTOR DIGI TRANSISTOR		C108 C116	NEHL1CM-476X NCB11AK-106X	E CAPACITOR C CAPACITOR	47uF 16V M 10uF 10V K
Q435	UN2226-X	DIGI TRANSISTOR		C117	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q436 Q437	UN2110-X UN2226-X	DIGI TRANSISTOR DIGI TRANSISTOR		C118	NCB31CK-105X	C CAPACITOR	1uF 16V K
Q437 Q438	UN2226-X UN2226-X	DIGI TRANSISTOR DIGI TRANSISTOR		C119 C120	NCB31CK-105X NCB31CK-105X	C CAPACITOR C CAPACITOR	1uF 16V K 1uF 16V K
Q439	UN2110-X	DIGI TRANSISTOR		C121	NCB31CK-105X	C CAPACITOR	1uF 16V K
Q443 Q444	UN2212-X 2SC1623A/5-6/-X	DIGI TRANSISTOR SI TRANSISTOR		C122 C123	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K
Q445	2SC1623A/5-6/-X	SI TRANSISTOR		C123	NCB31CK-105X	C CAPACITOR	1uF 16V K
Q501	2SC3928A/QR/-X	TRANSISTOR		C125	NCB31CK-105X	C CAPACITOR	1uF 16V K
Q502 Q503	2SC3928A/QR/-X 2SC3928A/QR/-X	TRANSISTOR TRANSISTOR		C126 C127	NCB31CK-105X NCB11AK-106X	C CAPACITOR C CAPACITOR	1uF 16V K 10uF 10V K
Q553	2SC3928A/QR/-X	TRANSISTOR		C128	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q609	2SC3928A/QR/-X	TRANSISTOR		C129	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q614 Q621	2SA1530A/QR/-X 2SA1530A/QR/-X	TRANSISTOR TRANSISTOR		C130 C131	NEHL1CM-476X NCB31CK-104X	E CAPACITOR C CAPACITOR	47uF 16V M 0.1uF 16V K
Q622	2SC3928A/QR/-X	TRANSISTOR		C132	NCB31CK-105X	C CAPACITOR	1uF 16V K
Q751 Q752	2SA1530A/QR/-X UN2226-X	TRANSISTOR		C133	NCB31CK-105X	C CAPACITOR	1uF 16V K
Q3001	2SC1623A/5-6/-X	DIGI TRANSISTOR SI TRANSISTOR		C134 C136	NCB31CK-105X NCB11AK-106X	C CAPACITOR C CAPACITOR	1uF 16V K 10uF 10V K
Q3502	2SC1623A/5-6/-X	SI TRANSISTOR		C137	NCB11AK-106X	C CAPACITOR	10uF 10V K
Q3503	RT1N441C-X	DIGI TRANSISTOR		C138 C139	NCB31CK-103X NCB31CK-105X	C CAPACITOR C CAPACITOR	0.01uF 16V K 1uF 16V K
D105	1SS355W-X	CHIP DIODE		C141	NEHL1CM-106X	E CAPACITOR	10uF 16V M
D281	1SS355W-X	CHIP DIODE		C142	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
D282 D283	1SS355W-X 1SS355W-X	CHIP DIODE CHIP DIODE		C143 C148	NCB31CK-104X NCB31CK-105X	C CAPACITOR C CAPACITOR	0.1uF 16V K 1uF 16V K
D401	UDZS10B-X	Z DIODE		C149	NEHL1CM-106X	E CAPACITOR	10uF 16V M
D402	UDZS10B-X UDZS10B-X	Z DIODE Z DIODE		C150	NEHL1AM-107X	E CAPACITOR	100uF 10V M
D403 D404	UDZS10B-X UDZS10B-X	Z DIODE Z DIODE		C151 C152	NEHL1CM-106X NCB31CK-105X	E CAPACITOR C CAPACITOR	10uF 16V M 1uF 16V K
D405	UDZS10B-X	Z DIODE		C153	NEHL1CM-106X	E CAPACITOR	10uF 16V M
D406 D407	UDZS10B-X UDZS10B-X	Z DIODE Z DIODE		C154 C155	NEHL1AM-107X NEHL1CM-106X	E CAPACITOR E CAPACITOR	100uF 10V M 10uF 16V M
D407	UDZS10B-X	Z DIODE		C155	NCB31CK-103X	C CAPACITOR	0.01uF 16V K
D409	UDZS10B-X	Z DIODE		C157	NCB31CK-103X	C CAPACITOR	0.01uF 16V K
D411 D412	UDZS10B-X UDZS10B-X	Z DIODE Z DIODE		C158 C161	NCB31CK-103X NCB31CK-103X	C CAPACITOR C CAPACITOR	0.01uF 16V K 0.01uF 16V K
D412	UDZS10B-X	Z DIODE		C167	NCB31CK-103X	C CAPACITOR	0.1uF 16V K
D414	UDZS10B-X	Z DIODE		C168	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
D415 D416	UDZS10B-X UDZS10B-X	Z DIODE Z DIODE		C169 C170	NCB31CK-103X NCB31CK-103X	C CAPACITOR C CAPACITOR	0.01uF 16V K 0.01uF 16V K
D420	UDZS10B-X	Z DIODE		C171	NCB31CK-103X	C CAPACITOR	0.01uF 16V K
D421	UDZS10B-X	Z DIODE		C172	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
D422 D423	UDZS10B-X UDZS10B-X	Z DIODE Z DIODE		C173 C174	NDC31HJ-680X NDC31HJ-331X	C CAPACITOR C CAPACITOR	68pF 50V J 330pF 50V J
D424	UDZS10B-X	Z DIODE		C176	NCB31CK-103X	C CAPACITOR	0.01uF 16V K
D425	UDZS10B-X	Z DIODE		C177	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
D427 D428	UDZS10B-X UDZS10B-X	Z DIODE Z DIODE		C178 C179	NCB31CK-105X NEHL1CM-476X	C CAPACITOR E CAPACITOR	1uF 16V K 47uF 16V M
D431	UDZS10B-X	Z DIODE		C180	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
D432	UDZS10B-X	Z DIODE		C181	NCB31CK-103X	C CAPACITOR	0.01uF 16V K
D440 D441	UDZS10B-X UDZS10B-X	Z DIODE Z DIODE		C182 C183	NCB31CK-103X NCB31CK-103X	C CAPACITOR C CAPACITOR	0.01uF 16V K 0.01uF 16V K
D442	UDZS10B-X	Z DIODE		C184	NDC31HJ-151X	C CAPACITOR	150pF 50V J
D443	UDZS10B-X	Z DIODE		C185	NDC31HJ-820X	C CAPACITOR	82pF 50V J

⚠Ref No.	Part No.	Part Name	Description Local	⚠Ref No.	Part No.	Part Name	Description Local
C187	NCB31CK-104X	C CAPACITOR E CAPACITOR	0.1uF 16V K 10uF 16V M	C511 C512	NENA1CM-475X NENA1CM-475X	BP E CAPACITOR	4.7uF 16V M
C189 C200	NEHL1CM-106X NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C513	NENA1CM-475X	BP E CAPACITOR BP E CAPACITOR	4.7uF 16V M 4.7uF 16V M
C201	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C514	NENA1CM-475X	BP E CAPACITOR	4.7uF 16V M
C202	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C515	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C212	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	C516	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C213	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	C517	NEHL1EM-475X	E CAPACITOR	4.7uF 25V M
C261	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C518	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C262	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C519	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C263	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C520	NEHL1CM-106X	E CAPACITOR	10uF 16V M
C264	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C531	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C281	NEHL1CM-476X	E CAPACITOR	47uF 16V M	C532	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C291	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C533	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C292	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C551	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C293	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C552	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C381	NDC31HJ-680X	C CAPACITOR	68pF 50V J	C553	NEHL1CM-476X	E CAPACITOR	47uF 16V M
C382	NDC31HJ-680X	C CAPACITOR	68pF 50V J	C554	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C383	NCB31AK-105X	C CAPACITOR	1uF 10V K	C555 C556	NEHL1AM-107X	E CAPACITOR	100uF 10V M
C401	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C557	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C402	NCB21AK-225X	C CAPACITOR	2.2uF 10V K		NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C403	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C558	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K
C404	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C559	NEHL0JM-226X	E CAPACITOR	22uF 6.3V M
C405	NCB21AK-225X NCB21AK-225X	C CAPACITOR	2.2uF 10V K 2.2uF 10V K	C560 C561	NCB30JK-225X NEHL0JM-226X	C CAPACITOR E CAPACITOR	2.2uF 6.3V K
C406 C407	NCB21AK-225X	C CAPACITOR C CAPACITOR	2.2uF 10V K	C562	NEHL0JM-226X	E CAPACITOR	22uF 6.3V M 22uF 6.3V M
C408	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C563	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C409	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C564	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C410	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C565	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C411	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C566	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C412	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C567	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C413	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C568	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C414	NCB11CK-105X	C CAPACITOR	1uF 16V K	C569	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C415	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C570	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C416	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C571	NEHL0JM-226X	E CAPACITOR	22uF 6.3V M
C417	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C572	NCB31CK-105X	C CAPACITOR	1uF 16V K
C418	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C573	NEHL0JM-226X	E CAPACITOR	22uF 6.3V M
C419	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C574	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C420	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C575	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C421	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C576	NEHL1AM-107X	E CAPACITOR	100uF 10V M
C422	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C577	NEHL1AM-107X	E CAPACITOR	100uF 10V M
C424	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C578	NEHL1AM-107X	E CAPACITOR	100uF 10V M
C425	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C579	NEHL1AM-107X	E CAPACITOR	100uF 10V M
C426	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C612	NEHL1CM-107X	E CAPACITOR	100uF 16V M
C427	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C614	NENA1CM-475X	BP E CAPACITOR	4.7uF 16V M
C428	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C615	NENA1CM-475X	BP E CAPACITOR	4.7uF 16V M
C429	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C616	NEHL1CM-476X	E CAPACITOR	47uF 16V M
C430	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C617	NEHL1CM-106X	E CAPACITOR	10uF 16V M
C431	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	C623	NCB21CK-184X	C CAPACITOR	0.18uF 16V K
C432	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	C624	NCB31HK-222X	C CAPACITOR	2200pF 50V K
C433	NCB11CK-105X	C CAPACITOR	1uF 16V K	C625	NCB31HK-183X	C CAPACITOR	0.018uF 50V K
C440	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C628	NCB31HK-123X	C CAPACITOR	0.012uF 50V K
C441	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C629	NCB31HK-222X	C CAPACITOR	2200pF 50V K
C442	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C630	NCB21CK-184X	C CAPACITOR	0.18uF 16V K
C443	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C632	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C444	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C633	NCB31HK-822X	C CAPACITOR	8200pF 50V K
C445	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C634	NCB31HK-822X	C CAPACITOR	8200pF 50V K
C446	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C635	NCB31HK-681X	C CAPACITOR	680pF 50V K
C447	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C636	NCB31HK-681X	C CAPACITOR	680pF 50V K
C448	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	C638	NCB31EK-223X	C CAPACITOR	0.022uF 25V K
C449	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	C639	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C450	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	C640	NCB31CK-105X	C CAPACITOR	1uF 16V K
C451	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	C641	NCB31CK-105X	C CAPACITOR	1uF 16V K
C452	NCB11CK-105X	C CAPACITOR	1uF 16V K	C642	NEHL1CM-106X	E CAPACITOR	10uF 16V M
C453	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C644	NEHL1EM-475X	E CAPACITOR	4.7uF 25V M
C454	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C646	NEHL1EM-475X	E CAPACITOR	4.7uF 25V M
C455	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C647	NCB31CK-105X	C CAPACITOR	1uF 16V K
C456	NCB11CK-105X	C CAPACITOR	1uF 16V K	C648	NCB31CK-105X	C CAPACITOR	1uF 16V K
C457	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C649	NCB31CK-105X	C CAPACITOR	1uF 16V K
C461	NDC31HJ-101X	C CAPACITOR	100pF 50V J	C650	NCB31CK-105X	C CAPACITOR	1uF 16V K
C462	NDC31HJ-101X	C CAPACITOR	100pF 50V J	C651	NCB31CK-105X	C CAPACITOR	1uF 16V K
C463	NDC31HJ-101X	C CAPACITOR	100pF 50V J	C653	NCB31EK-223X	C CAPACITOR	0.022uF 25V K
C464	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C654	NCB31CK-473X	C CAPACITOR	0.047uF 16V K
C465	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C655	NEHL1CM-106X	E CAPACITOR	10uF 16V M
C466	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	C657	NEHL1EM-475X	E CAPACITOR	4.7uF 25V M
C468	NDC31HJ-101X	C CAPACITOR	100pF 50V J	C659	NEHL1EM-475X	E CAPACITOR	4.7uF 25V M
C469	NDC31HJ-101X	C CAPACITOR	100pF 50V J	C660	NCB31CK-105X	C CAPACITOR	1uF 16V K
C491	NEHL1CM-106X	E CAPACITOR	10uF 16V M	C661	NCB31CK-105X	C CAPACITOR	1uF 16V K
C492	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C662	NCB21AK-225X	C CAPACITOR	2.2uF 10V K
C493	NEHL1CM-107X	E CAPACITOR	100uF 16V M	C663	NCB31CK-105X	C CAPACITOR	1uF 16V K
C494	NCB31HK-102X	C CAPACITOR	1000pF 50V K	C664	NCB31CK-105X	C CAPACITOR	1uF 16V K
C501	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	C665	NCB31CK-105X	C CAPACITOR	1uF 16V K
C502	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	C666	NCB11AK-106X	C CAPACITOR	10uF 10V K
C503	NCB31HK-222X	C CAPACITOR	2200pF 50V K	C667	NCB31CK-105X	C CAPACITOR	1uF 16V K
C504	NCB31HK-222X	C CAPACITOR	2200pF 50V K	C668	NCB31CK-105X	C CAPACITOR	1uF 16V K
C505	NCB31HK-822X	C CAPACITOR		C669	NCB31CK-105X	C CAPACITOR	1uF 16V K
C506	NCB31HK-822X	C CAPACITOR	8200pF 50V K 8200pF 50V K	C670	NCB31CK-105X	C CAPACITOR	1uF 16V K
C507	NEHL1AM-107X	E CAPACITOR	100uF 10V M	C671	NCB21AK-225X	C CAPACITOR	2.2uF 10V K
C508	NEHL1HM-105X	E CAPACITOR	1uF 50V M	C672	NCB21AK-225X	C CAPACITOR	2.2uF 10V K
C509	NEHL1HM-105X	E CAPACITOR	1uF 50V M	C673	NDC31HJ-330X	C CAPACITOR	33pF 50V J
C510	NEHL1CM-476X	E CAPACITOR	47uF 16V M	C674	NDC31HJ-330X	C CAPACITOR	33pF 50V J
3010	THE TOWN TOWN	_ 0, a / (0) / (1)	77 GI 10 V IVI	0017	112001110 0007	3 3, 11 NOTION	00pi 00 v u

ÆRef No.	Part No.	Part Name	Description Local	⚠Ref No.	Part No.	Part Name	Description Local
C675	NEHL1CM-106X	E CAPACITOR	10uF 16V M	R165	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
C676 C677	NCB31HK-104X NCB31CK-105X	C CAPACITOR C CAPACITOR	0.1uF 50V K 1uF 16V K	R166 R167	NRSA63J-224X NRSA63J-224X	MG RESISTOR MG RESISTOR	220kΩ 1/16W J 220kΩ 1/16W J
C678 C679	NCB31HK-153X NDC31HJ-330X	C CAPACITOR C CAPACITOR	0.015uF 50V K 33pF 50V J	R168 R169	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J
C680	NDC31HJ-330X	C CAPACITOR	33pF 50V J	R181	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J
C681 C682	NEHL1CM-106X NCB31HK-104X	E CAPACITOR C CAPACITOR	10uF 16V M 0.1uF 50V K	R183 R184	NRSA63J-154X NRSA63J-224X	MG RESISTOR MG RESISTOR	150kΩ 1/16W J 220kΩ 1/16W J
C685	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R186	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C710 C716	NCB31HK-104X NEHL1CM-476X	C CAPACITOR E CAPACITOR	0.1uF 50V K 47uF 16V M	R187 R188	NRSA63J-0R0X NRSA63J-103X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J
C717 C751	NCB31AK-105X	C CAPACITOR	1uF 10V K	R189 R190	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C752	NCB31HK-222X NEHL1HM-105X	C CAPACITOR E CAPACITOR	2200pF 50V K 1uF 50V M	R191	NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C753 C754	NEHL0GM-227X NEHL1CM-476X	E CAPACITOR E CAPACITOR	220uF 4V M 47uF 16V M	R192 R193	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C755	NEHL0GM-227X	E CAPACITOR	220uF 4V M	R195	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C756 C757	NEHL1HM-105X NEHL1HM-105X	E CAPACITOR E CAPACITOR	1uF 50V M 1uF 50V M	R197 R198	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C758	NCB31HK-222X	C CAPACITOR	2200pF 50V K 0.1uF 50V K	R199 R200	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C759 C760	NCB31HK-104X NCB31HK-104X	C CAPACITOR C CAPACITOR	0.1uF 50V K	R203	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J
C761 C904	NEHL1AM-107X NCB11AK-106X	E CAPACITOR C CAPACITOR	100uF 10V M 10uF 10V K	R206 R207	NRSA63J-562X NRSA63J-562X	MG RESISTOR MG RESISTOR	5.6kΩ 1/16W J 5.6kΩ 1/16W J
C905	NEHM1CM-476X	E CAPACITOR	47uF 16V M	R216	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C906 C913	NCB31EK-104X NEX51CM-335X	C CAPACITOR E CAPACITOR	0.1uF 25V K 3.3uF 16V M	R217 R218	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C914	NEX50JM-156X	E CAPACITOR	15uF 6.3V M	R219	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C920 C3001	NEX50JM-156X NCB31HK-222X	E CAPACITOR C CAPACITOR	15uF 6.3V M 2200pF 50V K	R220 R221	NRSA63J-101X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 0Ω 1/16W J
C3002 C3003	NEHL1CM-476X NCB31CK-104X	E CAPACITOR C CAPACITOR	47uF 16V M 0.1uF 16V K	R227 R228	NRSA63J-0R0X NRSA63J-331X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 330Ω 1/16W J
C3004	NEX60JM-227X	E CAPACITOR	220uF 6.3V M	R231	NRSA63J-330X	MG RESISTOR MG RESISTOR	33Ω 1/16W J
C3005 C3007	NCB31HK-333X NCF31AZ-105X	C CAPACITOR C CAPACITOR	0.033uF 50V K 1uF 10V Z	R232 R233	NRSA63J-471X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	470Ω 1/16W J 0Ω 1/16W J
C3008	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R234	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3009 C3010	NEHL1HM-106X NCB31HK-103X	E CAPACITOR C CAPACITOR	10uF 50V M 0.01uF 50V K	R235 R236	NRSA63J-0R0X NRSA63J-331X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 330Ω 1/16W J
C3011 C3012	NEHL1HM-106X	E CAPACITOR	10uF 50V M	R237 R238	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C3014	NCB31HK-103X NEHL1HM-106X	C CAPACITOR E CAPACITOR	0.01uF 50V K 10uF 50V M	R239	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J
C3015 C3501	NCB31HK-103X NCB11AK-106X	C CAPACITOR C CAPACITOR	0.01uF 50V K 10uF 10V K	R241 R242	NRSA63J-0R0X NRSA63J-331X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 330Ω 1/16W J
C3502	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	R243	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3503 C3511	NCB31HK-103X NCB31HK-103X	C CAPACITOR C CAPACITOR	0.01uF 50V K 0.01uF 50V K	R245 R246	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C3512 C3513	NCB31HK-103X	C CAPACITOR C CAPACITOR	0.01uF 50V K 2pF 50V J	R247 R248	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C3514	NDC31HJ-2R0X NDC31HJ-2R0X	C CAPACITOR	2pF 50V J	R249	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3515 C3516	NCB31CK-104X NEHL1AM-107X	C CAPACITOR E CAPACITOR	0.1uF 16V K 100uF 10V M	R250 R251	NRSA63J-223X NRSA63J-153X	MG RESISTOR MG RESISTOR	22kΩ 1/16W J 15kΩ 1/16W J
C3517	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R252	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3518 C3523	NCB31HK-222X NDC31HJ-102X	C CAPACITOR C CAPACITOR	2200pF 50V K 1000pF 50V J	R253 R254	NRSA63J-0R0X NRSA63J-223X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 22kΩ 1/16W J
C3524 C3525	NDC31HJ-102X NEHL1CM-106X	C CAPACITOR E CAPACITOR	1000pF 50V J 10uF 16V M	R255 R256	NRSA63J-153X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	15kΩ 1/16W J 0Ω 1/16W J
C3526	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R257	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C3527 C3528	NCB31CK-104X NEHL1AM-107X	C CAPACITOR E CAPACITOR	0.1uF 16V K 100uF 10V M	R259 R260	NRSA63J-0R0X NRSA63J-101X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 100Ω 1/16W J
C3529	NEHL1CM-106X	E CAPACITOR	10uF 16V M	R261	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
C3530 C3531	NCB11AK-106X NCB31CK-104X	C CAPACITOR C CAPACITOR	10uF 10V K 0.1uF 16V K	R262 R263	NRSA63J-101X NRSA63J-331X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 330Ω 1/16W J
C3534 C3535	NCF31AZ-105X NCF31AZ-105X	C CAPACITOR C CAPACITOR	1uF 10V Z 1uF 10V Z	R264 R265	NRSA63J-101X NRSA63J-331X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 330Ω 1/16W J
C3536	NCB11AK-106X	C CAPACITOR	10uF 10V K	R266	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C3537 C3544	NCB31CK-104X NCB31AK-105X	C CAPACITOR C CAPACITOR	0.1uF 16V K 1uF 10V K	R267 R275	NRSA63J-331X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	330Ω 1/16W J 0Ω 1/16W J
C3546 C3561	NCB31AK-105X	C CAPACITOR	1uF 10V K 0.01uF 50V K	R276 R277	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J
C3564	NCB31HK-103X NRSA63J-0R0X	C CAPACITOR MG RESISTOR	0.01uF 50V K 0Ω 1/16W J	R278	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R140	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R284 R286	NRSA63J-563X NRSA63J-333X	MG RESISTOR MG RESISTOR	56kΩ 1/16W J 33kΩ 1/16W J
R141	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R288	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R142 R143	NRSA63J-333X NRSA63J-682X	MG RESISTOR MG RESISTOR	33kΩ 1/16W J 6.8kΩ 1/16W J	R289 R293	NRSA63J-750X NRSA63J-750X	MG RESISTOR MG RESISTOR	75Ω 1/16W J 75Ω 1/16W J
R144	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R294	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R145 R148	NRSA63J-333X NRSA63J-682X	MG RESISTOR MG RESISTOR	33kΩ 1/16W J 6.8kΩ 1/16W J	R382 R384	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R149 R150	NRSA63J-682X NRSA63J-333X	MG RESISTOR MG RESISTOR	6.8kΩ 1/16W J 33kΩ 1/16W J	R385 R390	NRSA63J-0R0X NRSA63J-101X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 100Ω 1/16W J
R151	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R401	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R152 R153	NRSA63J-682X NRSA63J-682X	MG RESISTOR MG RESISTOR	6.8kΩ 1/16W J 6.8kΩ 1/16W J	R402 R403	NRSA63J-750X NRSA63J-750X	MG RESISTOR MG RESISTOR	75Ω 1/16W J 75Ω 1/16W J
R154	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R404	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R157 R158	NRSA63J-333X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	33kΩ 1/16W J 0Ω 1/16W J	R405 R406	NRSA63J-750X NRSA63J-680X	MG RESISTOR MG RESISTOR	75Ω 1/16W J 68Ω 1/16W J
R159 R160	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R407 R408	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R161	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R410	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
R164	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	R411	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J

⚠Ref No.	Part No.	Part Name	Description Local	⚠Ref No.	Part No.	Part Name	Description Local
R412	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	R555	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R413 R414	NRSA63J-224X NRSA63J-224X	MG RESISTOR MG RESISTOR	220kΩ 1/16W J 220kΩ 1/16W J	R556 R557	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J
R419	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	R560	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
R420 R421	NRSA63J-224X NRSA63J-750X	MG RESISTOR MG RESISTOR	220kΩ 1/16W J 75Ω 1/16W J	R561 R562	NRSA63J-221X NRSA63J-221X	MG RESISTOR MG RESISTOR	220Ω 1/16W J 220Ω 1/16W J
R422	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	R563	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R423 R426	NRSA63J-750X NRSA63J-103X	MG RESISTOR MG RESISTOR	75Ω 1/16W J 10kΩ 1/16W J	R564 R565	NRSA63J-221X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	220Ω 1/16W J 0Ω 1/16W J
R427	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R566	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R428 R437	NRSA63J-103X NRSA63J-391X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 390Ω 1/16W J	R567 R568	NRSA63J-101X NRSA63J-103X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 10kΩ 1/16W J
R438	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R569	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R439 R440	NRSA63J-471X NRSA63J-391X	MG RESISTOR MG RESISTOR	470Ω 1/16W J 390Ω 1/16W J	R570 R571	NRSA63J-101X NRSA63J-105X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 1MΩ 1/16W J
R441	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R572	NRSA63J-4R7X	MG RESISTOR	4.7Ω 1/16W J
R442 R443	NRSA63J-471X NRSA63J-102X	MG RESISTOR MG RESISTOR	470Ω 1/16W J 1kΩ 1/16W J	R573 R574	NRSA63J-103X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 0Ω 1/16W J
R444	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	R575	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R445 R446	NRSA63J-393X NRSA63J-102X	MG RESISTOR MG RESISTOR	39kΩ 1/16W J 1kΩ 1/16W J	R576 R577	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J
R447	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	R578	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R448 R450	NRSA63J-471X NRSA63J-750X	MG RESISTOR MG RESISTOR	470Ω 1/16W J 75Ω 1/16W J	R588 R590	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R451	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	R593	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R452 R453	NRSA63J-750X NRSA63J-750X	MG RESISTOR MG RESISTOR	75Ω 1/16W J 75Ω 1/16W J	R594 R599	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R454	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	R621	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J
R455 R456	NRSA63J-222X NRSA63J-680X	MG RESISTOR MG RESISTOR	2.2kΩ 1/16W J 68Ω 1/16W J	R622 R623	NRSA63J-153X NRSA63J-104X	MG RESISTOR MG RESISTOR	15kΩ 1/16W J 100kΩ 1/16W J
R457	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R624	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R458 R459	NRSA63J-391X NRSA63J-223X	MG RESISTOR MG RESISTOR	390Ω 1/16W J 22kΩ 1/16W J	R625 R626	NRSA63J-563X NRSA63J-563X	MG RESISTOR MG RESISTOR	56kΩ 1/16W J 56kΩ 1/16W J
R460	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	R634	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J
R461 R462	NRSA63J-750X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	75Ω 1/16W J 0Ω 1/16W J	R635 R636	NRSA63J-563X NRSA63J-473X	MG RESISTOR MG RESISTOR	56kΩ 1/16W J 47kΩ 1/16W J
R463	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R638	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J
R464 R467	NRSA63J-750X NRSA63J-750X	MG RESISTOR MG RESISTOR	75Ω 1/16W J 75Ω 1/16W J	R639 R640	NRSA63J-821X NRSA63J-821X	MG RESISTOR MG RESISTOR	820Ω 1/16W J 820Ω 1/16W J
R475	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	R642	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
R476 R482	NRSA63J-331X NRSA63J-393X	MG RESISTOR MG RESISTOR	330Ω 1/16W J 39kΩ 1/16W J	R644 R645	NRSA63J-392X NRSA63J-222X	MG RESISTOR MG RESISTOR	3.9kΩ 1/16W J 2.2kΩ 1/16W J
R483	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	R647	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J
R484 R485	NRSA63J-471X NRSA63J-471X	MG RESISTOR MG RESISTOR	470Ω 1/16W J 470Ω 1/16W J	R649 R650	NRSA63J-683X NRSA63J-333X	MG RESISTOR MG RESISTOR	68kΩ 1/16W J 33kΩ 1/16W J
R486	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	R651	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R487 R488	NRSA63J-391X NRSA63J-223X	MG RESISTOR MG RESISTOR	390Ω 1/16W J 22kΩ 1/16W J	R652 R653	NRSA63J-101X NRSA63J-562X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 5.6kΩ 1/16W J
R489	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R654	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R491 R501	NRSA63J-105X NRSA63J-221X	MG RESISTOR MG RESISTOR	1MΩ 1/16W J 220Ω 1/16W J	R661 R662	NRSA63J-332X NRSA63J-332X	MG RESISTOR MG RESISTOR	3.3kΩ 1/16W J 3.3kΩ 1/16W J
R502	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	R665 R666	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J
R503 R504	NRSA63J-472X NRSA63J-332X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 3.3kΩ 1/16W J	R669	NRSA63J-105X	MG RESISTOR	100Ω 1/16W J 1MΩ 1/16W J
R505 R506	NRSA63J-332X NRSA63J-472X	MG RESISTOR MG RESISTOR	3.3kΩ 1/16W J 4.7kΩ 1/16W J	R670 R671	NRSA63J-103X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 0Ω 1/16W J
R507	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	R687	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R508 R509	NRSA63J-102X NRSA63J-102X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 1kΩ 1/16W J	R688 R689	NRSA63J-222X NRSA63J-222X	MG RESISTOR MG RESISTOR	2.2kΩ 1/16W J 2.2kΩ 1/16W J
R510	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	R690	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R511 R512	NRSA63J-103X NRSA63J-333X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 33kΩ 1/16W J	R694 R695	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R513	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	R696	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R514 R515	NRSA63J-103X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 0Ω 1/16W J	R700 R701	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J
R516	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R702	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R517 R518	NRSA63J-333X NRSA63J-333X	MG RESISTOR MG RESISTOR	33kΩ 1/16W J 33kΩ 1/16W J	R703 R704	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J
R519	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	R711	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R520 R521	NRSA63J-333X NRSA63J-332X	MG RESISTOR MG RESISTOR	33kΩ 1/16W J 3.3kΩ 1/16W J	R712 R713	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R522	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	R714	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R523 R524	NRSA63J-102X NRSA63J-102X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 1kΩ 1/16W J	R718 R719	NRSA63J-104X NRSA63J-563X	MG RESISTOR MG RESISTOR	100kΩ 1/16W J 56kΩ 1/16W J
R525	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R720	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J
R526 R527	NRSA63J-102X NRSA63J-471X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 470Ω 1/16W J	R723 R751	NRSA63J-0R0X NRSA63J-102X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 1kΩ 1/16W J
R528	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	R752	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R529 R530	NRSA63J-101X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 0Ω 1/16W J	R755 R756	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R531	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R757	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R532 R533	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	R758 R759	NRSA63J-104X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	100kΩ 1/16W J 0Ω 1/16W J
R534	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R760	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R535 R536	NRSA63J-101X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 0Ω 1/16W J	R761 R764	NRSA63J-0R0X NRSA63J-102X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 1kΩ 1/16W J
R538	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R765	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
R539 R553	NRSA63J-0R0X NRSA63J-103X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J	R768 R769	NRSA63J-102X NRSA63J-220X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 22Ω 1/16W J
R554	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R770	NQR0146-003X	FERRITE BEADS	

Ref No.	Part No.	Part Name	Description Local
R921	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R922	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R923	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R924	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R925	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R926	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R927	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3002	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R3003	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R3006	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3007	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3009	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R3010	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R3011	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R3016	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3019	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3031	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3032	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3033	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3034	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3035	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3036	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3037	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3038	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3039	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3040	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3042	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3504	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3505	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3506	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3508	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R3511	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R3512	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R3514	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3515 R3516 R3517 R3546 R3547	NRSA63J-101X NRSA63J-101X NRSA63J-101X NRSA63J-103X NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J 100Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J
L101 L501 L902 L903	NQL79GM-100X NRSA02J-0R0X NQL52EM-220X NQR0562-010X	COIL MG RESISTOR COIL CHOKE COIL	10uH M 0Ω 1/10W J 22uH M
L906	NQL52EM-220X	COIL COIL COIL COIL MG RESISTOR	22uH M
L3001	NQL79GM-220X		22uH M
L3002	NQL79GM-100X		10uH M
L3003	NQL79GM-220X		22uH M
L3502	NRSA02J-0R0X		0Ω 1/10W J
L3503	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
L3504	NQL79GM-4R7X	COIL	4.7uH M
L3506	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
L3507	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
CN001	QGF0508C2-50W	CONNECTOR	FFC/FPC (1-50) FFC/FPC (1-40) EXT-1 EXT-2 EXT-3 AUDIO IN EXT-4
CN002	QGF0508C2-40W	CONNECTOR	
J401	QNZ0463-001	21 PIN SOCKET	
J402	QNZ0463-001	21 PIN SOCKET	
J403	QNZ0726-001	AV JACK	
J405	QNN0649-001	PIN JACK	
J406	QNN0650-001	PIN JACK	
J410 K661 K3501 K3502 LC3501 TU3001	QNZ0561-001 NQR0499-002X NQR0389-003X NQR0389-003X NQR0431-001X QAU0428-002	D CONNECTOR FERRITE BEADS FERRITE BEADS FERRITE BEADS EMI FILTER TUNER	DC IN
X551 X661 X3501	NAX0623-001X NAX0857-001X QAX0773-001Z	C RESONATOR C RESONATOR CRYSTAL	25.00MHz 18.4MHz

D-AMP P.W. BOARD ASS'Y (SFL-6221A-U2)

REFER TO PARTS LIST IN PAGE 3-12 FOR THIS P.W. BOARD.

SW P.W. BOARD ASS'Y (SFL-7206A-U2)

REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD.

LED P.W. BOARD ASS'Y (SFL-8710A-U2)

⚠Ref No.	Part No.	Part Name	Description Loca
IC8752	GP1UM261RKVF	IR DETECT UNIT	
Q8705 Q8709 Q8712 Q8713	RT1P440C-X RT1N241C-X RT1N241C-X RT1N241C-X	DIGI TRANSISTOR DIGI TRANSISTOR DIGI TRANSISTOR DIGI TRANSISTOR	
D8702 D8705 D8706 D8707 D8712 D8713	SEL5E20C-T SELU5E20C-T UDZW6.8B-X UDZW6.8B-X UDZW6.8B-X UDZW6.8B-X	LED LED Z DIODE Z DIODE Z DIODE Z DIODE	POWER ILLUMINATION
C8752	NEHL1CM-476X	E CAPACITOR	47uF 16V M
R8714 R8717 R8722 R8723 R8724 R8755	NRSA63J-331X NRSA63J-103X NRSA63J-101X NRSA63J-271X NRSA63J-0R0X NRSA63J-102X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR	330Ω 1/16W J 10kΩ 1/16W J 100Ω 1/16W J 270Ω 1/16W J 0Ω 1/16W J 1kΩ 1/16W J

POWER P.W. BOARD ASS'Y (SFL-9043A-U2)

REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD.

DC-DC P.W. BOARD ASS'Y (SFL-9144A-U2)

⚠Ref No.	Part No.	Part Name	Description Local
IC9601 IC9602 IC9603 IC9851	MP1593DN-X MP1593DN-X LM393DR-X BA09FP-X	IC IC IC	
Q9601 Q9651	2SC3928A/QR/-X 2SC3928A/QR/-X	TRANSISTOR TRANSISTOR	
D9601 D9602 D9603 D9604 D9605 D9606 D9652 D9653 D9654 D9655 D9681	EC30HA04-X 1SS355W-X UDZW3.0B-X PTZ6.8B-X EC30HA04-X EC30HA04-X EC30HA04-X PTZ6.8B-X 1SS355W-X UDZW9.1B-X 1SS355W-X	SB DIODE CHIP DIODE Z DIODE Z DIODE SB DIODE SB DIODE SB DIODE SB DIODE SB DIODE CHIP DIODE Z DIODE CHIP DIODE CHIP DIODE	
C9601 C9603 C9604 C9605 C9606 C9607 C9608 C9610 C9651 C9652 C9654 C9655 C9656 C9657 C9658 C9660 C9681 C9682 C9683 C9684 C9851 C9852	NCJ41HK-335X-U NCB31HK-103X NCJ41CK-226X-U NCJ41CK-226X-U NCB31HK-104X NCB31HK-332X NEHM1HM-105X NCJ41HK-335X-U NCB31HK-103X NCJ41CK-226X-U NCJ41CK-226X-U NCB31HK-104X NDC31HJ-101X NCB31HK-103X NBZ0008-107X NEHM1HM-105X NCB31EK-104X NCB31EK-104X NCB31EK-104X NCB31EK-104X NCB31EK-104X NCB31EK-104X NCB31EK-104X NCB31EK-104X NCB31EK-104X NCB31EK-104X NCB31EK-104X NCB31EK-104X NCB31EK-104X NCB31EK-104X NCB31EK-104X NCB31EK-104X NCB31EK-104X	C CAPACITOR E CAPACITOR C CAPACITOR	3.3uF 50V K 0.01uF 50V K 22uF 16V K 22uF 16V K 0.1uF 50V K 2200PF 50V K 3300PF 50V K 3300PF 50V K 0.01uF 50V M 3.3uF 50V K 0.01uF 50V K 22uF 16V K 22uF 16V K 0.1uF 50V K 100pF 50V J 0.01uF 50V K 100uF 1uF 50V M 0.1uF 25V K
R9602 R9603 R9604 R9605 R9606 R9607 R9608	NRSA02J-0R0X NRSA63J-562X NRVA02D-473X NRSA63D-104X NRSA63D-103X NRSA63J-682X NRSA63J-182X	MG RESISTOR MG RESISTOR CMF RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR	0Ω 1/10W J 5.6kΩ 1/16W J 47kΩ 1/10W D 100kΩ 1/16W D 10kΩ 1/16W D 6.8kΩ 1/16W J 1.8kΩ 1/16W J

ÆRef No.	Part No.	Part Name	Description Local	ÆRef No.	Part No.	Part Name	Description Local
R9609 R9610 R9651 R9652 R9653 R9654 R9655 R9656 R9657 R9658 R9658	NRSA63J-183X NRSA63J-223X NRSA02J-0R0X NRSA02J-0R0X NRSA63J-103X NRSA63D-473X NRSA63D-104X NRSA63D-103X NRSA63J-182X NRSA63J-182X NRSA63J-183X NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J 22kΩ 1/16W J 0Ω 1/10W J 0Ω 1/10W J 10kΩ 1/16W J 47kΩ 1/16W D 100kΩ 1/16W D 10kΩ 1/16W D 6.8kΩ 1/16W J 1.8kΩ 1/16W J 18kΩ 1/16W J 10kΩ 1/16W J	D7032 D7301 D9001 D9002 D9003 D9201 D9202 D9203 D9204 D9501 D9502	1SS355W-X RB501V-40-X EC30HA03L-X EC30HA03L-X PTZ3.9B-X EC30HA03L-X EC30HA03L-X PTZ3.9B-X 1SS355W-X 1SS355W-X 1SS355W-X	CHIP DIODE SB DIODE SB DIODE SB DIODE Z DIODE SB DIODE SB DIODE SB DIODE Z DIODE CHIP DIODE CHIP DIODE CHIP DIODE	
R9660 R9661 R9668 R9681 R9682 R9683 R9684 R9685 R9686 R9687 R9852 R9901 R9924	NRSA63J-104X NRSA63J-472X NRSA02J-0R0X NRS12BJ-332W NRSA63D-472X NRSA63D-472X NRSA63D-273X NRSA63D-273X NRSA63D-472X NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA03J-0R0X	MG RESISTOR	100K2 1/16W J 0Ω 1/10W J 3.3KΩ 1/2W J 4.7kΩ 1/16W D 6.8kΩ 1/16W D 27kΩ 1/16W D 27kΩ 1/16W D 4.7kΩ 1/16W D 0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J	C6002 C6101 C6103 C6107 C6109 C6111 C6112 C6113 C6114 C6116 C6117 C6118	NCB31CK-104X NCB30JK-225X NCB31AK-474X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31AK-474X NCB31AK-474X NCB31AK-474X NCB30JK-225X NCB31AK-474X NCB31AK-474X	C CAPACITOR	0.1uF 16V K 2.2uF 6.3V K 0.47uF 10V K 0.47uF 10V K 0.1uF 16V K 0.1uF 16V K 0.1uF 16V K 0.47uF 10V K 0.47uF 10V K 0.47uF 10V K 0.47uF 10V K 2.2uF 6.3V K 0.47uF 10V K
L9602 L9652 L9653	NQLC8CM-150X NQLC8CM-150X NQR0562-003X	COIL CHOKE COIL	15uH M 15uH M	C6121 C6122 C6123	NCB31AK-474X NEHL0JM-107X NCB31CK-104X	C CAPACITOR E CAPACITOR C CAPACITOR	0.47uF 10V K 100uF 6.3V M 0.1uF 16V K
DIGITAI	L P.W. BOARD Part No.	ASS'Y (SFL0D2 Part Name	258A-U2) Description Local	C6124 C6125 C6126 C6128 C6130 C6132 C6133	NEHLOJM-107X NCB31CK-104X NCB30JK-225X NCB30JK-225X NCB30JK-225X NEHL1EM-226X NCB31CK-154X	E CAPACITOR C CAPACITOR C CAPACITOR C CAPACITOR C CAPACITOR E CAPACITOR C CAPACITOR C CAPACITOR	100uF 6.3V M 0.1uF 16V K 2.2uF 6.3V K 2.2uF 6.3V K 2.2uF 6.3V K 22uF 25V M 0.15uF 16V K
IC6001 IC6002 IC6101 IC6102 IC6250 IC6251 IC6401 IC6402 IC6502 IC6724 IC7033 IC7036 IC7038 IC7201 IC7203 IC7204 IC7205 IC7301 IC7305 IC7306 IC7306 IC7306 IC7306 IC7306 IC7306 IC7301 IC7306 IC7301 IC7306 IC7306 IC7306 IC7306 IC7306 IC7301 IC7306 IC7301 IC7306 IC7506 IC7506 IC7606 IC9901 IC	JCC5060 SN74LVC1G08V-X EDD1232AAFA-6B SC2595STRT-X UPC5702GS-027-X R1170H331B-X ISL98001CQZ-140 R1170H331B-X THC63LVDM83R-W S-80928CLNB-G-W CD74HC4094PW-X ADC081S021CIS-X SN74LVC2G17KE-X 39VF800A71EKD98 M12L16161A-7TG S-80928CLNB-G-W SN74LV00APW-X SDA6000-B12 K4S641632K-UC75 CD74HC4053PW-X MM1689CH-X S-80928CLNB-G-W SN74LVC2G06K-X ATF32-26X70BU MM1671XN-X MP2263DN-C053-X MM1662FT-X MP2263DN-C053-X MM1701CH-X	IC(MICRO C ROM) IC IC IC IC IC(DIGITAL) IC IC IC IC IC IC IC IC IC	(SERVICE)	C6134 C6135 C6139 C6217 C6218 C6236 C6237 C6238 C6239 C6241 C6242 C6243 C6244 C6245 C6246 C6247 C6248 C6246 C6255 C6255 C6256 C6251 C6252 C6253 C6254 C6253 C6254 C6253 C6254 C6266 C6261 C6262 C6263 C6264 C6267	NCB11AK-106X NCB31CK-104X NCB31HK-104X NCB31HK-104X NCB31HK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-105X NCB11AK-106X NCB31AK-105X NCB11AK-106X NCB31AK-105X NCB11AK-106X NCB31AK-105X NCB31AK-105X NCB31AK-105X NCB31AK-105X NCB31AK-106X NCB31AK-106X NCB31AK-106X NCB31AK-106X NCB31AK-106X NCB31AK-106X NCB31AK-106X NCB11AK-106X NCB11AK-106X NCB11AK-106X NCB11AK-106X NCB11AK-225X NCB21AK-225X	C CAPACITOR	10uF 10V K 0.1uF 16V K 0.1uF 16V K 0.1uF 50V K 0.1uF 50V K 0.1uF 50V K 0.1uF 16V K 0.1uF 16V K 0.1uF 16V K 0.1uF 16V K 10uF 10V K
Q6202 Q6203 Q6204 Q6205 Q6206 Q6211 Q6213 Q6214 Q6250 Q6251 Q7030 Q7032 Q7033 Q7034 Q7035 Q7201 Q7301 Q9501 Q9502 Q9503	2SA1530A/QR/-X 2SA1022/BC/-X 2SA1022/BC/-X 2SA1022/BC/-X 2SA1022/BC/-X 2SC3837K/NP/-X 2SC3837K/NP/-X 2SC3837K/NP/-X 2SC3837K/NP/-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X UN2113-X UN2113-X UN2113-X UN2113-X UN2113-X UN2113-X UN2113-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X	TRANSISTOR DIGI TRANSISTOR CHIP TRANSISTOR		C6268 C6270 C6271 C6272 C6273 C6274 C6276 C6277 C6278 C6279 C6280 C6282 C6283 C6284 C6285 C6288 C6289 C6290 C6291 C6293 C6291 C6295 C6296 C6297	NCB31CK-104X NCB31CK-106X NCB11AK-106X	C CAPACITOR SP E CAPACITOR SP E CAPACITOR C CAPACITOR	0.1úF 16V K 0.1uF 16V K 100uF 10V K

⚠Ref No.	Part No.	Part Name	Description Local	⚠Ref No.	Part No.	Part Name	Description Local
C6402	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6672	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6403	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6673	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6406	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6677	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6409	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6678	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6410	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6679	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6411	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6680	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z
C6412	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6681	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6413	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6682	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6414	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6683	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6415	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C6684	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6416	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6685	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6417	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6686	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6418	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6687	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6419	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6688	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6420	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6689	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6422	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6690	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6423	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6691	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6424	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6692	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6425	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6693	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6428	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6694	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6429	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6695	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6430 C6431	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	C6696 C6697	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6432	NCF31CZ-104X NCB11AK-106X	C CAPACITOR C CAPACITOR	10uF 10V K	C6698	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z
C6433	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6699	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6434	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6701	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z
C6435	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6723	NCB31HK-222X	C CAPACITOR	2200pF 50V K
C6436	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6724	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6437	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6901	NBZ0007-107X	SP E CAPACITOR	100uF
C6438	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6902	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6439	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6903	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6440	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6904	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6441	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6905	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6445	NEX60GM-337X	E CAPACITOR	330uF 4V M	C6906	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6520	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6907	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6521	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6908	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6522	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6909	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6523	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6910	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6524	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6911	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6525	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6912	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6531	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6913	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6533	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6914	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6573 C6601	NCB21CK-105X	C CAPACITOR	1uF 16V K	C6915 C6916	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6602	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K	C6917	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K
C6603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6918	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6610	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6919	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6611	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6921	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6612	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6922	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6613	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6923	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6614	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6924	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6615	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6925	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6616	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6926	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6617	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6927	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6618	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6928	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6619	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7030	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6620	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7031	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6621	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7033	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6622	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7039	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C6623	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7040	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6624	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7044	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6625	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7051	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6626	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7052	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6627	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7053	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6628	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7054	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6629	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7055	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6630	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7056	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6631	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7057	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6632	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7058	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6633	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7059	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6634	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7060	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6635	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7061	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6636	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7062	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6637	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7063	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6638	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7064	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6639	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7065	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6640	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7066	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6641	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7067	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6642	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7068	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6643	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7073	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6644	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7202	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6645	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	C7203 C7204	NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K
C6646 C6656	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7205	NCB31CK-104X NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6657	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7206	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6658	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7207	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6659	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7208	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6660	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7209	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6661	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7211	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C6671	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7212	NCB31HK-104X	C CAPACITOR	0.1uF 50V K

⚠Ref No.	Part No.	Part Name	Description Local	∆Ref No.	Part No.	Part Name	Description Loca
C7213	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R6009	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7214 C7215	NDC31HJ-102X NDC31HJ-330X	C CAPACITOR C CAPACITOR	1000pF 50V J 33pF 50V J	R6014 R6017	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C7301	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6018	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7302 C7303	NCF31CZ-104X NCB11AK-106X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 10uF 10V K	R6019 R6020	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C7304	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6073	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7305 C7306	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	R6074 R6075	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C7307	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6080	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7308 C7309	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	R6101 R6102	NRSA63J-220X NRSA63J-220X	MG RESISTOR MG RESISTOR	22Ω 1/16W J 22Ω 1/16W J
C7310	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6103	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7311 C7312	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	R6104 R6105	NRSA63J-220X NRSA63J-220X	MG RESISTOR MG RESISTOR	22Ω 1/16W J 22Ω 1/16W J
C7313	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6106	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7314 C7315	NCB11AK-106X NCF31CZ-104X	C CAPACITOR C CAPACITOR	10uF 10V K 0.1uF 16V Z	R6107 R6108	NRSA63J-100X NRSA63J-100X	MG RESISTOR MG RESISTOR	10Ω 1/16W J 10Ω 1/16W J
C7318	NCB11AK-106X	C CAPACITOR	10uF 10V K	R6109	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7319 C7320	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	R6110 R6111	NRSA63J-220X NRSA63J-220X	MG RESISTOR MG RESISTOR	22Ω 1/16W J 22Ω 1/16W J
C7321	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6112	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7324 C7325	NCF31CZ-104X NCB31HK-103X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.01uF 50V K	R6113 R6114	NRSA63J-470X NRSA63J-470X	MG RESISTOR MG RESISTOR	47Ω 1/16W J 47Ω 1/16W J
C7326	NDC31HJ-270X	C CAPACITOR	27pF 50V J	R6115	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7327 C7328	NDC31HJ-330X NCF31CZ-104X	C CAPACITOR C CAPACITOR	33pF 50V J 0.1uF 16V Z	R6116 R6117	NRSA63J-470X NRSA63J-470X	MG RESISTOR MG RESISTOR	47Ω 1/16W J 47Ω 1/16W J
C7329	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6118	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7330 C7331	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	R6119 R6120	NRSA63J-470X NRSA63J-470X	MG RESISTOR MG RESISTOR	47Ω 1/16W J 47Ω 1/16W J
C7333	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6121	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7334 C7335	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	R6122 R6127	NRSA63J-470X NRSA63J-1R5X	MG RESISTOR MG RESISTOR	47Ω 1/16W J 1.5Ω 1/16W J
C7338	NEHM1CM-106X	E CAPACITOR	10uF 16V M	R6141	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7340 C7341	NCB31HK-103X NCB11AK-106X	C CAPACITOR C CAPACITOR	0.01uF 50V K 10uF 10V K	R6143 R6201	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C7342	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	R6202	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7343 C7344	NCB11AK-106X NCB30JK-225X	C CAPACITOR C CAPACITOR	10uF 10V K 2.2uF 6.3V K	R6203 R6204	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C7345	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	R6207	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7346 C7348	NCB11AK-106X NCF31CZ-104X	C CAPACITOR C CAPACITOR	10uF 10V K 0.1uF 16V Z	R6208 R6209	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C7349	NCB31HK-102X	C CAPACITOR	1000pF 50V K	R6212	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7350 C7353	NCF31CZ-104X NCB31EK-682X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 6800pF 25V K	R6214 R6215	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C7502	NCB31AK-105X	C CAPACITOR	1uF 10V K	R6216	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7506 C7507	NCB31HK-103X NCB31HK-103X	C CAPACITOR C CAPACITOR	0.01uF 50V K 0.01uF 50V K	R6217 R6219	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C7508	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6230	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7510 C7513	NCB31HK-103X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.01uF 50V K 0.1uF 16V K	R6231 R6232	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C7514	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6233	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7515 C7517	NCB31HK-103X NCB31HK-103X	C CAPACITOR C CAPACITOR	0.01uF 50V K 0.01uF 50V K	R6235 R6236	NRSA63J-101X NRSA63J-331X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 330Ω 1/16W J
C7601	NCB11CK-105X	C CAPACITOR	1uF 16V K	R6238	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C7620 C7632	NCF11CZ-475X NCB31AK-224X	C CAPACITOR C CAPACITOR	4.7uF 16V Z 0.22uF 10V K	R6239 R6241	NRSA63J-331X NRSA63J-101X	MG RESISTOR MG RESISTOR	330Ω 1/16W J 100Ω 1/16W J
C9001 C9002	NDC31HJ-102X	C CAPACITOR C CAPACITOR	1000pF 50V J 10uF 25V K	R6242 R6244	NRSA63J-331X NRSA63J-101X	MG RESISTOR	330Ω 1/16W J 100Ω 1/16W J
C9002	NCJ41EK-106X-U NCB31EK-104X	C CAPACITOR C CAPACITOR	0.1uF 25V K	R6244	NRSA63J-331X	MG RESISTOR MG RESISTOR	330Ω 1/16W J
C9004 C9005	NCB31HK-103X NCJ41CK-226X-U	C CAPACITOR C CAPACITOR	0.01uF 50V K 22uF 16V K	R6248 R6249	NRSA63J-473X NRSA63J-333X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 33kΩ 1/16W J
C9006	NDC31HJ-120X	C CAPACITOR	12pF 50V J	R6251	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C9007 C9010	NCB31HK-103X NCJ41CK-226X-U	C CAPACITOR C CAPACITOR	0.01uF 50V K 22uF 16V K	R6252 R6253	NRSA63J-0R0X NRSA63J-222X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 2.2kΩ 1/16W J
C9101	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	R6254	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
C9103 C9201	NCB11CK-225X NDC31HJ-102X	C CAPACITOR C CAPACITOR	2.2uF 16V K 1000pF 50V J	R6255 R6256	NRSA63J-472X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 0Ω 1/16W J
C9202	NCJ41EK-106X-U	C CAPACITOR	10uF 25V K	R6257	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C9204 C9205	NCB31HK-103X NCJ41CK-226X-U	C CAPACITOR C CAPACITOR	0.01uF 50V K 22uF 16V K	R6258 R6259	NRSA63J-151X NRSA63J-472X	MG RESISTOR MG RESISTOR	150Ω 1/16W J 4.7kΩ 1/16W J
C9206	NDC31HJ-120X	C CAPACITOR	12pF 50V J	R6260	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C9207 C9208	NCB31HK-153X NCJ41CK-226X-U	C CAPACITOR C CAPACITOR	0.015uF 50V K 22uF 16V K	R6261 R6262	NRSA63J-222X NRSA63J-151X	MG RESISTOR MG RESISTOR	2.2kΩ 1/16W J 150Ω 1/16W J
C9211	NCB31HK-473X	C CAPACITOR	0.047uF 50V K	R6263	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C9302 C9303	NCB11CK-475X NCB31HK-103X	C CAPACITOR C CAPACITOR	4.7uF 16V K 0.01uF 50V K	R6264 R6265	NRSA63J-0R0X NRSA63J-103X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J
C9304	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	R6266	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C9306 C9501	NRSA63J-0R0X NCB31CK-105X	MG RESISTOR C CAPACITOR	0Ω 1/16W J 1uF 16V K	R6267 R6268	NRSA63J-472X NRSA63D-242X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 2.4kΩ 1/16W D
C9502	NCB31CK-105X	C CAPACITOR	1uF 16V K	R6269	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D
C9611 C9617	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	R6270 R6271	NRSA63D-242X NRSA63D-242X	MG RESISTOR MG RESISTOR	2.4kΩ 1/16W D 2.4kΩ 1/16W D
C9619	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6274	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C9621	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6275 R6276	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6002	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R6279	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6003 R6006	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R6280 R6282	NRSA63J-331X NRSA63J-331X	MG RESISTOR MG RESISTOR	330Ω 1/16W J 330Ω 1/16W J
R6008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R6283	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J

ÆRef No.	Part No.	Part Name	Description Local	ÆRef No.	Part No.	Part Name	Description Local
R6284	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7055	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6285 R6286 R6287	NRSA63J-0R0X NRSA63J-391X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 390Ω 1/16W J	R7056 R7057	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6287 R6288	NRSA63J-391X NRSA63J-391X NRSA63J-391X	MG RESISTOR MG RESISTOR	390Ω 1/16W J 390Ω 1/16W J	R7058 R7059	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6289	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7060	NRSA63J-154X	MG RESISTOR	150kΩ 1/16W J
R6291	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7061	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6292	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7062	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6294	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7063	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6295	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7064	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R6296	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7065	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R6297	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7066	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
R6298	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7067	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
R6299	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	R7068	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6401	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7069	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6402	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7070	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6403	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	R7071	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6404 R6405 R6408	NRSA63J-101X NRSA63J-103X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 10kΩ 1/16W J	R7077 R7078	NRSA63J-471X NRSA63J-102X	MG RESISTOR MG RESISTOR	470Ω 1/16W J 1kΩ 1/16W J
R6408	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7081	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6409	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7084	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R6410	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	R7085	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R6411	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	R7086	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6412	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7087	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6414	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7089	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6415	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7090	NRSA63J-0R0X		0Ω 1/16W J
R6416	NRSA63,I-101X	MG RESISTOR	100Ω 1/16W J	R7091	NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J
R6417	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7094	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R6419	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	R7095	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6421	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	R7097	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6423	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7098	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6424	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	R7099	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6425	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7100	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6426	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7103	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6427 R6428	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7106	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6428	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7107	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6503	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7109	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6521	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7110	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6522	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7112	NRSA63J-0R0X	MG RESISTOR	
R6523 R6524	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7113	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6524	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7119	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R6525	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7123	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6529	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7124	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6531	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7125	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6532	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7127	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6534	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7128	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6536	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7131	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6537	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7157	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6538	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7170	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6539	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7173	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6569	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7174	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6575	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7175	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6576	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7176	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6595	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R7177	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6596	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7178	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6599 R6602	NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	R7179	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6605	NRSA63J-103X NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7187 R7190	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6607	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7191	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6609	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7192	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6611	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6707	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7202	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6712	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7203	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6713	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7207	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6730	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7208	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6731	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7211	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6732	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6733	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7215	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6921	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7217	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6922	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7221	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6923	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7223	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6924	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7224	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R7030	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7225	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R7031	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7229	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R7032	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	R7230	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R7033	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7231	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R7034	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7232	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J
R7035	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7234	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
R7036	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7235	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R7039	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7237	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
R7041	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7238	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R7042	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	R7241	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R7043	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7243	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R7045	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7302	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R7046	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7303	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R7047	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7304	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R7049	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7305	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R7051	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7309	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R7052	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7310	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R7054	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7311	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J

⚠Ref No.	Part No.	Part Name	Description Local	Ref No.	Part No.	Part Name	Description Loca
R7312	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R9504	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R7313 R7314	NRSA63J-103X NRSA63J-101X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 100Ω 1/16W J	R9505 R9506	NRSA63J-103X NRSA63J-223X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 22kΩ 1/16W J
R7315	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R9507	NRSA63J-223X NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R7316 R7317	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	R9508 R9509	NRSA63J-223X NRSA63J-103X	MG RESISTOR MG RESISTOR	22kΩ 1/16W J 10kΩ 1/16W J
R7318	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R9510	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
R7319 R7320	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	RA6001 RA6002	NRZ0080-0R0X NRZ0034-0R0W	NET RESISTOR NET RESISTOR	0Ω 0Ω 1/32W J x4
R7321 R7322	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J	RA6007	NRZ0080-0R0X	NET RESISTOR	0Ω
R7322 R7324	NRSA63J-103X NRSA63J-101X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 100Ω 1/16W J	RA6008 RA6009	NRZ0080-0R0X NRZ0034-0R0W	NET RESISTOR NET RESISTOR	0Ω 0Ω 1/32W J x4
R7325	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	RA6010	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4
R7327 R7330	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	RA6014 RA6101	NRZ0034-0R0W NRZ0040-220X	NET RESISTOR NET RESISTOR	0Ω 1/32W J x4 22Ω 1/16W J x4
R7332	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6102	NRZ0080-220X	NET RESISTOR	22Ω
R7333	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6103	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4
R7334 R7335	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	RA6104 RA6105	NRZ0040-220X NRZ0080-220X	NET RESISTOR NET RESISTOR	22Ω 1/16W J x4 22Ω
R7337	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6106	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4
R7339 R7340	NRSA63J-472X NRSA63J-101X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 100Ω 1/16W J	RA6107 RA6108	NRZ0080-220X NRZ0080-220X	NET RESISTOR NET RESISTOR	22Ω 22Ω
R7341	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6109	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4
R7342 R7343	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6110	NRZ0080-470X NRZ0040-470X	NET RESISTOR	47Ω
R7343 R7346	NRSA63J-101X NRSA63J-472X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 4.7kΩ 1/16W J	RA6111 RA6112	NRZ0040-470X NRZ0040-470X	NET RESISTOR NET RESISTOR	47Ω 1/16W J x4 47Ω 1/16W J x4
R7348	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	RA6113	NRZ0080-470X	NET RESISTOR	47Ω
R7349 R7350	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	RA6114 RA6115	NRZ0040-470X NRZ0080-470X	NET RESISTOR NET RESISTOR	47Ω 1/16W J x4 47Ω
R7351	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	RA6116	NRZ0080-470X	NET RESISTOR	47Ω
R7352 R7353	NRSA63J-273X NRSA63J-273X	MG RESISTOR MG RESISTOR	27kΩ 1/16W J 27kΩ 1/16W J	RA6401 RA6402	NRZ0080-330X NRZ0080-330X	NET RESISTOR NET RESISTOR	33Ω 33Ω
R7354 R7355	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	RA6403	NRZ0080-330X	NET RESISTOR	33Ω
R7355	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6531	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4
R7356 R7358	NRSA63J-0R0X NRSA63J-471X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 470Ω 1/16W J	RA6541 RA6542	NRZ0033-0R0W NRZ0080-0R0X	NET RESISTOR NET RESISTOR	$\Omega \Omega \Omega \Omega$
R7359	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	RA6543	NRZ0033-0R0W	NET RESISTOR	$\Omega\Omega$
R7363 R7364	NRSA63J-103X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 0Ω 1/16W J	RA6544 RA6545	NRZ0080-0R0X NRZ0033-0R0W	NET RESISTOR NET RESISTOR	$\Omega\Omega$ $\Omega\Omega$
R7365	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	RA6546 RA7202	NRZ0080-0R0X	NET RESISTOR	0Ω
R7366	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J 220Ω 1/16W J	RA7202 RA7203	NRZ0080-473X	NET RESISTOR NET RESISTOR	47kΩ
R7367 R7368	NRSA63J-221X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J	RA7204	NRZ0080-473X NRZ0080-473X	NET RESISTOR	47kΩ 47kΩ
R7369	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	RA7205	NRZ0080-473X	NET RESISTOR	47kΩ
R7371 R7372	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	RA7503	NQR0271-004X	EMI FILTER	
R7501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6101	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
R7502 R7512	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6102 L6103	NQL79GM-220X NQL79GM-220X	COIL COIL	22uH M 22uH M
R7513	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6115	NQR0499-001X	FERRITE BEADS	
R7514 R7515	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6250 L6253	NQLB62J-120X NQLB62J-120X	COIL COIL	12uH J 12uH J
R7513	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6254	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
R7524	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6265	NQR0499-001X	FERRITE BEADS	
R7525 R7529	NRSA63J-0R0X NRSA63J-103X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J	L6266 L6402	NQR0499-001X NQL79GM-100X	COIL	10uH M
R7530	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L6403	NQL79GM-100X	COIL	10uH M
R7532 R7533	NRSA63J-273X NRSA63J-221X	MG RESISTOR MG RESISTOR	27kΩ 1/16W J 220Ω 1/16W J	L6404 L6502	NQL79GM-100X NRSA02J-0R0X	COIL MG RESISTOR	10uH M 0Ω 1/10W J
R7544	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6521	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4
R7601 R7602	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	L6522 L6523	NRZ0034-0R0W NRZ0034-0R0W	NET RESISTOR NET RESISTOR	0Ω 1/32W J x4 0Ω 1/32W J x4
R7634	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	L6531	NQR0199-007X	FERRITE BEADS	052 1/32 VV 3 X4
R7635	NRSA63J-102X NRSA63J-0R0X	MG RESISTOR	1kΩ 1/16W J	L6701	NQR0413-003X	EMI FILTER	
R7643 R7658	NRSA63J-103X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J	L6911 L6912	NQR0499-001X NQR0499-001X	FERRITE BEADS FERRITE BEADS	
R8796	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6922	NQL79GM-220X	COIL	22uH M
R8797 R8798	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6923 L6924	NQL79GM-220X NQL79GM-220X	COIL COIL	22uH M 22uH M
R8799	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6925	NQL79GM-220X	COIL	22uH M
R9001 R9002	NRSA63J-473X NRSA02J-0R0X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 0Ω 1/10W J	L6931 L7301	NQR0499-001X NQR0489-002X	FERRITE BEADS FERRITE BEADS	
R9003	NRSA63D-273X	MG RESISTOR	27kΩ 1/16W D	L7302	NQR0489-002X	FERRITE BEADS	
R9004	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	L7303 L7304	NQL092K-4R7X	COIL	4.7uH K
R9005 R9006	NRSA63D-103X NRSA63J-512X	MG RESISTOR MG RESISTOR	10kΩ 1/16W D 5.1kΩ 1/16W J	L7304 L7305	NQL092K-4R7X NQL092K-4R7X	COIL COIL	4.7uH K 4.7uH K
R9007	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	L7306	NQL092K-4R7X	COIL	4.7uH K
R9008 R9201	NRSA63J-0R0X NRSA63J-473X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 47kΩ 1/16W J	L7307 L7308	NQL092K-4R7X NQL092K-4R7X	COIL COIL	4.7uH K 4.7uH K
R9202	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	L7309	NQL092K-4R7X	COIL	4.7uH K
R9203	NRSA63D-302X	MG RESISTOR	3kΩ 1/16W D	L7310	NQL092K-4R7X	COIL	4.7uH K
R9205 R9206	NRSA63D-103X NRSA63J-332X	MG RESISTOR MG RESISTOR	10kΩ 1/16W D 3.3kΩ 1/16W J	L7311 L7312	NQL092K-4R7X NQL092K-4R7X	COIL COIL	4.7uH K 4.7uH K
R9207	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	L7313	NQL092K-4R7X	COIL	4.7uH K
R9209 R9302	NRSA63J-0R0X NRSA02J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/10W J	L7314 L7315	NQR0489-002X NQL092K-4R7X	FERRITE BEADS COIL	4.7uH K
R9308	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L7316	NQL092K-4R7X	COIL	4.7uH K
R9501 R9502	NRSA63J-472X NRSA63J-223X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 22kΩ 1/16W J	L7501 L7502	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R9502 R9503	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	L/502 L9001	NQLC8CM-150X	COIL	15uH M

⚠Ref No.	Part No.	Part Name	Description Local
L9201	NQLC8CM-150X	COIL	15uH M
CN001 CN002 J8501 J8502 K6250	QGF0508C2-50W QGF0508C2-40W NNZ0117-001 NNZ0117-001 NRSA02J-0R0X	CONNECTOR CONNECTOR HDMI CONNECTOR HDMI CONNECTOR MG RESISTOR	FFC/FPC (1-50) FFC/FPC (1-40) DIGITAL IN-1 DIGITAL IN-2 0Ω 1/10W J
K6261 K6263 K6264 K6265	NQR0489-002X NQR0489-002X NQR0489-002X NRSA02J-0R0X	FERRITE BEADS FERRITE BEADS FERRITE BEADS MG RESISTOR	0Ω 1/10W J
K6266 K6267 K6268 K6272	NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NQR0499-001X	MG RESISTOR MG RESISTOR MG RESISTOR FERRITE BEADS	0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J
K6401 K6402 K6403 K6404	NQR0499-001X NQR0499-001X NQR0499-001X NRSA02J-0R0X	FERRITE BEADS FERRITE BEADS FERRITE BEADS MG RESISTOR	0Ω 1/10W J
K6405 K6921 K7028 K7030	NRSA02J-0R0X NRSA02J-0R0X NRSA63J-0R0X NRSA02J-0R0X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR	0Ω 1/10W J 0Ω 1/10W J 0Ω 1/16W J 0Ω 1/10W J
K7031 K7032 K7033 K7034	NQR0470-007X NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X	EMI FILTER MG RESISTOR MG RESISTOR MG RESISTOR	0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J
K7202 K7211 K7302 K7308 K7501	NRSA63J-0R0X NQR0499-002X NQR0389-003X NRSA02J-390X NQR0413-002X	MG RESISTOR FERRITE BEADS FERRITE BEADS MG RESISTOR FERRITE BEADS	0Ω 1/16W J 39Ω 1/10W J
K7504 LC6501 LC7505 LC9301 LC9303 LC9305 LC9306	NRSA63J-0R0X NQR0479-001X NQR0483-005X NQR0470-003X NQR0483-005X NQR0483-005X NQR0483-005X	MG RESISTOR EMI FILTER	0Ω 1/16W J
LC9307 X6250 X7001 X7309	NQR0483-005X NAX0580-001X NAX0669-001X NAX0618-001X	EMI FILTER CXO C RESONATOR CRYSTAL	6.000MHz

PRINTED WIRING BOARD PARTS LIST [LT-26X70BU/P, LT-26X70SU/P]

ANALOG DW. DOADD AGGIV (OFL 4040		_			_
ANALOG P.W. BOARD ASS'Y (SFL-1242	•	∆Ref No.	Part No.	Part Name	Description Local
REFER TO PARTS LIST IN PAGE 3-27 FOR THIS F	P.W. BOARD.	Q7201 Q7301 Q9501	2SC3928A/QR/-X 2SC2412K/QR/-X UN2213-X	TRANSISTOR CHIP TRANSISTOR DIGI TRANSISTOR	
D-AMP P.W. BOARD ASS'Y (SFL-6221A-	U2)	Q9502 Q9503	2SC3928A/QR/-X 2SC3928A/QR/-X	TRANSISTOR TRANSISTOR	
REFER TO PARTS LIST IN PAGE 3-12 FOR THIS F	P.W. BOARD.	D6503 D7032 D7301	1SS355W-X MA111-X RB501V-40-X	CHIP DIODE CHIP DIODE SB DIODE	
SW P.W. BOARD ASS'Y (SFL-7206A-U2)		D9001 D9002	EC30HA03L-X EC30HA03L-X	SB DIODE SB DIODE	
REFER TO PARTS LIST IN PAGE 3-13 FOR THIS F	P.W. BOARD.	D9002 D9003 D9201 D9202 D9203	PTZ3.9B-X EC30HA03L-X EC30HA03L-X PTZ3.9B-X	Z DIODE SB DIODE SB DIODE Z DIODE Z DIODE	
LED P.W. BOARD ASS'Y (SFL-8710A-U2)	D9204 D9501	1SS355W-X 1SS355W-X	CHIP DIODE CHIP DIODE	
REFER TO PARTS LIST IN PAGE 3-31 FOR THIS F	P.W. BOARD.	D9502	1SS355W-X	CHIP DIODE	0.4.5.40.444
POWER P.W. BOARD ASS'Y (SFL-9043A	∆-U2)	C6002 C6101 C6103 C6107 C6109	NCB31CK-104X NCB30JK-225X NCB31AK-474X NCB31AK-474X NCB31CK-104X	C CAPACITOR C CAPACITOR C CAPACITOR C CAPACITOR	0.1uF 16V K 2.2uF 6.3V K 0.47uF 10V K 0.47uF 10V K
REFER TO PARTS LIST IN PAGE 3-13 FOR THIS F	P.W. BOARD.	C6111 C6112 C6113	NCB31CK-104X NCB31CK-104X NCB31AK-474X	C CAPACITOR C CAPACITOR C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K 0.1uF 16V K 0.47uF 10V K
DC-DC P.W. BOARD ASS'Y (SFL-9144A-	U2)	C6114 C6116	NCB31CK-104X NCB31AK-474X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.47uF 10V K
REFER TO PARTS LIST IN PAGE 3-31 FOR THIS F	P.W. BOARD.	C6117 C6118	NCB30JK-225X NCB31AK-474X	C CAPACITOR C CAPACITOR	2.2uF 6.3V K 0.47uF 10V K
		C6119 C6121	NCB31AK-474X NCB31AK-474X	C CAPACITOR C CAPACITOR	0.47uF 10V K 0.47uF 10V K
DIGITAL P.W. BOARD ASS'Y		C6122 C6123	NEHLOJM-107X NCB31CK-104X	E CAPACITOR C CAPACITOR	100uF 6.3V M 0.1uF 16V K
(LCA10599-63C) (SFL-0D258A)		C6124 C6125	NEHLOJM-107X NCB31CK-104X	E CAPACITOR C CAPACITOR	100uF 6.3V M 0.1uF 16V K
⚠Ref No. Part No. Part Name	Description Local	C6126	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K
	<u>.</u>	C6128 C6130	NCB30JK-225X NCB30JK-225X	C CAPACITOR C CAPACITOR	2.2uF 6.3V K 2.2uF 6.3V K
IC6001 JCC5060 IC IC6002 SN74LVC1G08V-X IC		C6132 C6133	NEHL1EM-226X NCB31CK-154X	E CAPACITOR C CAPACITOR	22uF 25V M 0.15uF 16V K
IC6101 EDD1232AAFA-6B IC IC6102 SC2595STRT-X IC		C6134 C6135	NCB11AK-106X NCB31CK-104X	C CAPACITOR C CAPACITOR	10uF 10V K 0.1uF 16V K
IC6250 UPC5702GS-027-X IC		C6139 C6217	NCB31CK-104X NCB31HK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 50V K
IC6251 R1170H331B-X IC IC6401 ISL98001CQZ-140 IC		C6218 C6236	NCB31HK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 50V K 0.1uF 16V K
IC6402 R1170H331B-X IC IC6502 THC63LVDM83R-W IC		C6237 C6238	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K
IC6724 S-80928CLNB-G-W IC IC7033 CD74HC4094PW-X IC		C6239	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
IC7036 ADC081S021CIS-X IC IC7038 SN74LVC2G17KE-X IC		C6241 C6242	NCB11AK-106X NCB31AK-105X	C CAPACITOR C CAPACITOR	10uF 10V K 1uF 10V K
IC7201 39VF800A7IEKD98 IC(MICRO C ROM) IC7203 M12L16161A-7TG IC		C6243 C6244	NCB11AK-106X NCB31AK-105X	C CAPACITOR C CAPACITOR	10u⊦ 10V K 1uF 10V K
IC7204 S-80928CLNB-G-W IC		C6245 C6246	NCB11AK-106X NCB31AK-105X	C CAPACITOR C CAPACITOR	10uF 10V K 1uF 10V K
IC7205 SN74LV00APW-X IC IC7301 SDA6000-B12 IC		C6247 C6248	NCB11AK-106X NCB31AK-105X	C CAPACITOR C CAPACITOR	10uF 10V K 1uF 10V K
IC7303 K4S641632H-UC75 IC IC7304 CD74HC4053PW-X IC		C6249 C6250	NCB31AK-105X NCB11AK-106X	C CAPACITOR C CAPACITOR	1uF 10V K 10uF 10V K
IC7305 MM1689CH-X IC IC7306 S-80928CLNB-G-W IC		C6251 C6252	NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 10uF 10V K
IC7502 SN74LVC2G06K-X IC IC7602 ATF32-26X70BU IC	(SERVICE)	C6253	NCB11AK-106X NCB11AK-106X	C CAPACITOR	10uF 10V K
IC7606 MM1671XN-X IC IC9001 MP2263DN-C053-X IC	(=	C6254 C6255	NCB11AK-106X NCB11AK-106X	C CAPACITOR C CAPACITOR	10uF 10V K 10uF 10V K
IC9101 MM1662FT-X IC IC9201 MP2263DN-C053-X IC		C6260 C6261	NCB21AK-225X NCB21AK-225X	C CAPACITOR C CAPACITOR	2.2uF 10V K 2.2uF 10V K
IC9301 MM1701CH-X IC		C6262 C6263	NCB21AK-225X NCB21AK-225X	C CAPACITOR C CAPACITOR	2.2uF 10V K 2.2uF 10V K
Q6202 2SA1530A/QR/-X TRANSISTOR		C6264 C6267	NDC31HJ-100X NDC31HJ-100X	C CAPACITOR C CAPACITOR	10pF 50V J 10pF 50V J
Q6203 2SA1022/BC/-X TRANSISTOR Q6204 2SA1022/BC/-X TRANSISTOR		C6268 C6270	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K
Q6205 2SA1022/BC/-X TRANSISTOR Q6206 2SA1022/BC/-X TRANSISTOR		C6271	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q6211 2SC3837K/NP/-X TRANSISTOR Q6212 2SC3837K/NP/-X TRANSISTOR		C6272 C6273	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K
Q6213 2SC3837K/NP/-X TRANSISTOR Q6214 2SC3837K/NP/-X TRANSISTOR		C6274 C6276	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K
Q6250 2SC3928A/QR/-X TRANSISTOR		C6277 C6278	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K
Q6501 2SC3928A/QR/-X TRANSISTOR		C6279 C6280	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K
Q7030 UN2213-X DIGI TRANSISTOR Q7032 UN2113-X DIGI TRANSISTOR		C6282 C6283	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K
Q7033 UN2113-X DIGI TRANSISTOR Q7034 UN2113-X DIGI TRANSISTOR		C6284 C6285	NCB31CK-104X NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K 0.1uF 16V K
Q7035 UN2113-X DIGI TRANSISTOR		00200	140D3 10K-104V	O OALAOHUR	U. IUI IUV K

⚠Ref No.	Part No.	Part Name	Description Local	∆Ref No.	Part No.	Part Name	Description Local
C6286	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6644	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6288	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6645	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6289 C6290	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6646	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6290	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6656	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6291	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6657	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6293	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6658	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6294	NBZ0007-107X	SP E CAPACITOR	100uF	C6659	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6295	NBZ0007-107X	SP E CAPACITOR	100uF	C6660	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6296	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6661 C6671	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z
C6297 C6402	NCB11AK-106X NCB11AK-106X	C CAPACITOR C CAPACITOR	10uF 10V K 10uF 10V K	C6672	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z
C6403	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6673	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6406	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6677	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6409	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6678	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6410	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6679	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6411	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6680	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6412	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6681	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6413	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6682	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6414	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6683	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6415	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C6684	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6416	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6685	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6417	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6686	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6418	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6687	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6419	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6688	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6420	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6689	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6422	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6690	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6423	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	C6691 C6692	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z
C6424 C6425	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6693	NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z
C6428	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6694	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6429	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6695	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6430	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6696	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6431	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6697	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6432	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6698	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6433	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6699	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6434	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6701	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z
C6435	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6723	NCB31HK-222X	C CAPACITOR	2200pF 50V K
C6436	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6724	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6437	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6901	NBZ0007-107X	SP E CAPACITOR	100uF
C6438	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6902	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6439	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6903	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6440	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6904	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6441	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6905	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6445	NEX60GM-337X	E CAPACITOR	330uF 4V M	C6906	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6520	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6907	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6521	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6908	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6522	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6909	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6523	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6910	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6524	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6911	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6525	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6912 C6913	NCB11AK-106X	C CAPACITOR	10uF 10V K 0.1uF 16V K
C6531 C6533	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K	C6914	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K
C6573	NCB21CK-105X	C CAPACITOR	1uF 16V K	C6915	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6601	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6916	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6917	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6918	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6610	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6919	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6611	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6921	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6612	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6922	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6613	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6923	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6614	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6924	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6615	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6925	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6616	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6926	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6617	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6927	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6618	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6928	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6619	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7030	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6620	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7031	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6621	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7033	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6622	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7039	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C6623	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7040	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6624	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7044	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6625	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7051	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6626	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7052	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6627	NCF31CZ-104X	C CAPACITOR		C7053	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6628	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	C7054	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6629	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7055	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6630	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7056	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6631	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7057	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6632	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7058	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6633	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7059	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6634	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7060	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6635	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7061	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6636	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7062	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6637	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7063	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6638	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7064	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6639 C6640	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z 0.1uF 16V Z	C7065 C7066	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K
C6641	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7067	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6642	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7068	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6643	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7073	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
			· · · -	- *			

C7204 NCB31CK-104X C CAPACITOR 0.1uF 16V K C9617 NCF31CZ-104X C CAPACITOR 0.7205 NCB31CK-104X C CAPACITOR 0.1uF 16V K C9619 NCF31CZ-104X C CAPACITOR 0.7206 NCB31CK-104X C CAPACITOR 0.1uF 16V K C9619 NCF31CZ-104X C CAPACITOR 0.7207 NCB31CK-104X C CAPACITOR 0.1uF 16V K C7207 NCB31CK-104X C CAPACITOR 0.1uF 16V K C7208 NCB31CK-104X C CAPACITOR 0.1uF 16V K R6002 NRSA63J-0R0X MG RESISTOR 0.7209 NCB31CK-104X C CAPACITOR 0.1uF 16V K R6003 NRSA63J-0R0X MG RESISTOR 0.7219 NCB31HK-102X C CAPACITOR 0.1uF 16V K R6006 NRSA63J-0R0X MG RESISTOR 0.7211 NCB31HK-102X C CAPACITOR 0.1uF 50V K R6006 NRSA63J-0R0X MG RESISTOR 0.7213 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6009 NRSA63J-220X MG RESISTOR 0.7213 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6009 NRSA63J-220X MG RESISTOR 0.7214 NDC31HJ-102X C CAPACITOR 1000pF 50V J R6014 NRSA63J-0R0X MG RESISTOR 0.7215 NDC31HJ-330X C CAPACITOR 33pF 50V J R6014 NRSA63J-0R0X MG RESISTOR 0.7215 NDC31HJ-330X C CAPACITOR 0.1uF 16V Z R6018 NRSA63J-0R0X MG RESISTOR 0.7301 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6018 NRSA63J-0R0X MG RESISTOR 0.7302 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7303 NCB11AK-106X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF3	1 16V K 1 1 16V Z 1 1 16W J Ω 1/16W J
C7204 NCB31CK-104X C CAPACITOR 0.1uF 16V K C9617 NCF31CZ-104X C CAPACITOR 0 C7205 NCB31CK-104X C CAPACITOR 0.1uF 16V K C9619 NCF31CZ-104X C CAPACITOR 0 C7206 NCB31CK-104X C CAPACITOR 0.1uF 16V K C9621 NCF31CZ-104X C CAPACITOR 0 C7207 NCB31CK-104X C CAPACITOR 0.1uF 16V K C7208 NCB31CK-104X C CAPACITOR 0.1uF 16V K C7208 NCB31CK-104X C CAPACITOR 0.1uF 16V K R6002 NRSA63J-0R0X MG RESISTOR 0 C7209 NCB31CK-104X C CAPACITOR 0.1uF 16V K R6003 NRSA63J-0R0X MG RESISTOR 0 C7211 NCB31HK-102X C CAPACITOR 0.1uF 50V K R6006 NRSA63J-0R0X MG RESISTOR 0 C7212 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6008 NRSA63J-0R0X MG RESISTOR 0 C7213 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6008 NRSA63J-0R0X MG RESISTOR 0 C7214 NDC31HJ-104X C CAPACITOR 0.1uF 50V K R6009 NRSA63J-0R0X MG RESISTOR 0 C7215 NDC31HJ-330X C CAPACITOR 1000pF 50V J R6014 NRSA63J-0R0X MG RESISTOR 0 C7215 NDC31HJ-330X C CAPACITOR 1000pF 50V J R6014 NRSA63J-0R0X MG RESISTOR 0 C7301 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6018 NRSA63J-0R0X MG RESISTOR 0 C7302 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6018 NRSA63J-0R0X MG RESISTOR 0 C7303 NCB11AK-106X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0 C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0 C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0 C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0 C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0 C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0 C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR 0 C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR 0 C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR 0 C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR 0 C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR 0 C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR 0 C7305 NCB11AK-106X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0	1uF 16V Z 1uF 16V Z 1uF 16V Z Ω 1/16W J Ω 1/16W J
C7206 NCB31CK-104X C CAPACITOR 0.1uF 16V K C9621 NCF31CZ-104X C CAPACITOR 0 C7207 NCB31CK-104X C CAPACITOR 0.1uF 16V K R6002 NRSA63J-0R0X MG RESISTOR 0 C7209 NCB31CK-104X C CAPACITOR 0.1uF 16V K R6003 NRSA63J-0R0X MG RESISTOR 0 C7211 NCB31HK-102X C CAPACITOR 1000pF 50V K R6006 NRSA63J-0R0X MG RESISTOR 0 C7212 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6008 NRSA63J-0R0X MG RESISTOR 0 C7213 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6009 NRSA63J-0R0X MG RESISTOR 0 C7214 NDC31HJ-102X C CAPACITOR 0.1uF 50V K R6019 NRSA63J-0R0X MG RESISTOR 0 C7215 NDC31HJ-330X C CAPACITOR 33pF 50V J R6017 NRSA63J-0R0X MG RESISTOR 0 C7301 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6018 NRSA63J-0R0X MG RESISTOR	1uF 16V Z Ω 1/16W J
C7208 NCB31CK-104X C CAPACITOR 0.1uF 16V K R6002 NRSA63J-0R0X MG RESISTOR 0.7209 NCB31CK-104X C CAPACITOR 0.1uF 16V K R6003 NRSA63J-0R0X MG RESISTOR 0.7211 NCB31HK-102X C CAPACITOR 1000pF 50V K R6006 NRSA63J-0R0X MG RESISTOR 0.7212 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6008 NRSA63J-0R0X MG RESISTOR 0.7213 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6008 NRSA63J-0R0X MG RESISTOR 0.7213 NCB31HJ-102X C CAPACITOR 0.1uF 50V K R6009 NRSA63J-0R0X MG RESISTOR 0.7214 NDC31HJ-102X C CAPACITOR 1000pF 50V J R6014 NRSA63J-0R0X MG RESISTOR 0.7215 NDC31HJ-330X C CAPACITOR 33pF 50V J R6017 NRSA63J-0R0X MG RESISTOR 0.7301 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6018 NRSA63J-0R0X MG RESISTOR 0.7302 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7303 NCB11AK-106X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7303 NCB11AK-106X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C	Ω 1/16W J Ω 1/16W J
C7209 NCB31CK-104X C CAPACITOR 0.1uF 16V K R6003 NRSA63J-0R0X MG RESISTOR (C7211 NCB31HK-102X C CAPACITOR 1000pF 50V K R6006 NRSA63J-0R0X MG RESISTOR (C7212 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6008 NRSA63J-0R0X MG RESISTOR (C7213 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6009 NRSA63J-220X MG RESISTOR 22 C7214 NDC31HJ-102X C CAPACITOR 1000pF 50V J R6014 NRSA63J-0R0X MG RESISTOR (C7215 NDC31HJ-330X C CAPACITOR 33pF 50V J R6017 NRSA63J-0R0X MG RESISTOR (C7301 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6018 NRSA63J-0R0X MG RESISTOR (C7302 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR (C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESIST	Ω 1/16W J Ω 1/16W J
C7212 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6008 NRSA63J-0R0X MG RESISTOR 0.70 C7213 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6009 NRSA63J-220X MG RESISTOR 22 C7214 NDC31HJ-102X C CAPACITOR 1000pF 50V J R6014 NRSA63J-0R0X MG RESISTOR 0 C7215 NDC31HJ-330X C CAPACITOR 33pF 50V J R6017 NRSA63J-0R0X MG RESISTOR 0 C7301 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6018 NRSA63J-0R0X MG RESISTOR 0 C7302 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0 C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6020 NRSA63J-0R0X MG RESISTOR 0 C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR 0	Ω 1/16W J Ω 1/16W J
C7214 NDC31HJ-102X C CAPACITOR 1000pF 50V J R6014 NRSA63J-0R0X MG RESISTOR (C7215 NDC31HJ-330X C CAPACITOR 33pF 50V J R6017 NRSA63J-0R0X MG RESISTOR (C7301 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6018 NRSA63J-0R0X MG RESISTOR (C7302 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR (C7303 NCB11AK-106X C CAPACITOR 10uF 10V K R6020 NRSA63J-0R0X MG RESISTOR (C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR (Ω 1/16W J Ω 1/16W J
C7215 NDC31HJ-330X C CAPACITOR 33pF 50V J R6017 NRSA63J-0R0X MG RESISTOR C C7301 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6018 NRSA63J-0R0X MG RESISTOR C C7302 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR C C7303 NCB11AK-106X C CAPACITOR 10uF 10V K R6020 NRSA63J-0R0X MG RESISTOR C C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR C	Ω 1/16W J Ω 1/16W J
C7303 NCB11AK-106X C CAPACITOR 10uF 10V K R6020 NRSA63J-0R0X MG RESISTOR (C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR (Ω 1/16W J Ω 1/16W J Ω 1/16W J Ω 1/16W J Ω 1/16W J Ω 1/16W J
C7303 NCB11AK-106X C CAPACITOR 10uF 10V K R6020 NRSA63J-0R0X MG RESISTOR (C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR (Ω 1/16W J Ω 1/16W J Ω 1/16W J Ω 1/16W J
C7305 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6074 NRSA63.I-0R0X MG RESISTOR (Ω 1/16W J Ω 1/16W J Ω 1/16W J
07200 NOC2407 404V 0 0 ADACTOD 0 4 F 401/7 D0075 ND0402 L0D0V NO DC01070	Ω 1/16W J
C7307 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6080 NRSA63J-0R0X MG RESISTOR (O 1/16\M I
C7308 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6101 NRSA63J-220X MG RESISTOR 22	Ω 1/16W J
C7310 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6103 NRSA63J-220X MG RESISTOR 22	Ω 1/16W J
C7312 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6105 NRSA63J-220X MG RESISTOR 22	Ω 1/16W J Ω 1/16W J
C7313 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6106 NRSA63J-220X MG RESISTOR 22 C7314 NCB11AK-106X C CAPACITOR 10uF 10V K R6107 NRSA63J-100X MG RESISTOR 10	Ω 1/16W J Ω 1/16W J
C7315 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6108 NRSA63J-100X MG RESISTOR 10	Ω 1/16W J
C7319 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6110 NRSA63J-220X MG RESISTOR 22	Ω 1/16W J Ω 1/16W J
C7321 NCF31C7-104X C CAPACITOR 0 1uF 16V 7 R6112 NRSA63,I-470X MG RESISTOR 47	Ω 1/16W J Ω 1/16W J
C7324 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6113 NRSA63J-470X MG RESISTOR 47	Ω 1/16W J
C7326 NDC31HJ-270X C CAPACITOR 27pF 50V J R6115 NRSA63J-470X MG RESISTOR 47	Ω 1/16W J Ω 1/16W J
C7327 NDC31HJ-330X C CAPACITOR 33pF 50V J R6116 NRSA63J-470X MG RESISTOR 47	Ω 1/16W J Ω 1/16W J
C7329 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6118 NRSA63J-470X MG RESISTOR 47	Ω 1/16W J
C7330 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6119 NRSA63J-470X MG RESISTOR 47 C7331 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6120 NRSA63J-470X MG RESISTOR 47	Ω 1/16W J Ω 1/16W J
	Ω 1/16W J Ω 1/16W J
C7335 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6127 NRSA63J-1R5X MG RESISTOR 1.5 C7338 NEHM1CM-106X E CAPACITOR 10uF 16V M R6141 NRSA63J-0R0X MG RESISTOR 0.0 NRSA63	Ω 1/16W J Ω 1/16W J
C7340 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6143 NRSA63,J-0R0X MG RESISTOR (Ω 1/16W J
	Ω 1/16W J Ω 1/16W J
C7343 NCR11AK-106X C CAPACITOR 10uE 10V K R6203 NRSA63 L0R0X MG RESISTOR (Ω 1/16W J Ω 1/16W J
C7345 NCB30JK-225X C CAPACITOR 2.2uF 6.3V K R6207 NRSA63J-0R0X MG RESISTOR (Ω 1/16W J
C7348 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6209 NRSA63J-0R0X MG RESISTOR (Ω 1/16W J Ω 1/16W J
C7349 NCB31HK-102X C CAPACITOR 1000pF 50V K R6212 NRSA63J-0R0X MG RESISTOR (Ω 1/16W J Ω 1/16W J
C7353 NCB31EK-682X C CAPACITOR 6800pF 25V K R6215 NRSA63J-0R0X MG RESISTOR (Ω 1/16W J
	Ω 1/16W J Ω 1/16W J
C7507 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6219 NRSA63J-0R0X MG RESISTOR (Ω 1/16W J Ω 1/16W J
C7510 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6231 NRSA63J-0R0X MG RESISTOR (Ω 1/16W J
	Ω 1/16W J Ω 1/16W J
	Ω 1/16W J Ω 1/16W J
C7601 NCB11CK-105X C CAPACITOR 1uF 16V K R6238 NRSA63J-101X MG RESISTOR 100	Ω 1/16W J
	Ω 1/16W J Ω 1/16W J
	Ω 1/16W J Ω 1/16W J
C9003 NCB31EK-104X C CAPACITOR 0.1uF 25V K R6245 NRSA63J-331X MG RESISTOR 33(Ω 1/16W J
C9005 NCJ41CK-226X-U C CAPACITOR 22uF 16V K R6249 NRSA63J-333X MG RESISTOR 33F	Ω 1/16W J Ω 1/16W J
	Ω 1/16W J Ω 1/16W J
C9010 NCJ41CK-226X-U C CAPACITOR 22uF 16V K R6253 NRSA63J-222X MG RESISTOR 2.2F	Ω 1/16W J
C9103 NCB11CK-225X C CAPACITOR 2.2uF 16V K R6255 NRSA63J-472X MG RESISTOR 4.7h	Ω 1/16W J Ω 1/16W J
	Ω 1/16W J Ω 1/16W J
C9204 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6258 NRSA63J-151X MG RESISTOR 150	Ω 1/16W J
C9206 NDC31HJ-120X C CAPACITOR 12pF 50V J R6260 NRSA63J-0R0X MG RESISTOR (Ω 1/16W J Ω 1/16W J
	Ω 1/16W J Ω 1/16W J
C9211 NCB31HK-473X C CAPACITOR 0.047uF 50V K R6263 NRSA63J-472X MG RESISTOR 4.7H	Ω 1/16W J
C9303 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6265 NRSA63J-103X MG RESISTOR 10F	Ω 1/16W J Ω 1/16W J
	Ω 1/16W J Ω 1/16W J
	Ω 1/16W D

∆Ref No.	Part No.	Part Name	Description Local	ÆRef No.	Part No.	Part Name	Description Local
R6269	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	R7041	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6270	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	R7042	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
R6271	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	R7043	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6271 R6274 R6275	NRSA63D-242X NRSA63J-220X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	22Ω 1/16W J 0Ω 1/16W J	R7045 R7046	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6276	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7047	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6279	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7049	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6280	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	R7051	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6282	NRSA63J-331X NRSA63J-101X	MG RESISTOR MG RESISTOR	330Ω 1/16W J 100Ω 1/16W J	R7052 R7054	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6283 R6284	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7055	NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J
R6285	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7056	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6286	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	R7057	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6287	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	R7058	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6288	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	R7059	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6289	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7060	NRSA63J-154X	MG RESISTOR	150kΩ 1/16W J
R6291	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7061	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6292	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7062	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6292 R6294 R6295	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7063 R7064	NRSA63J-0R0X NRSA63J-103X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J
R6296	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7065	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R6297	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7066	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
R6298	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7067	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
R6299	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	R7068	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6401	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7069	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6401 R6402 R6403	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7070	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6404	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	R7071	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7077	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R6405	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7078	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R6408	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7081	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6409	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7084	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R6410 R6411	NRSA63J-100X NRSA63J-100X	MG RESISTOR MG RESISTOR	10Ω 1/16W J 10Ω 1/16W J	R7085 R7086	NRSA63J-221X NRSA63J-0R0X	MG RESISTOR MG RESISTOR MG RESISTOR	220Ω 1/16W J 0Ω 1/16W J
R6412	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7087	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6414	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7089	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6414 R6415	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7090	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6416	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7091	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6417	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7094	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R6419	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	R7095	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6421	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	R7097	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6423	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7098	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6424	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	R7099	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6425	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7100	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6426	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7103	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6427	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7106	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6428	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7107	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6503	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7109	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6521	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7110	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6522	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7112	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6523	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7113	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6524	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7119	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R6525	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7123	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6529	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7124	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6531	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7125	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6532	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7127	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6534	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7128	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6536	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7131	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6537	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7157	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6538	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7170	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6539	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7173	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6569	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7174	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6575	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7175	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6576	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7176	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6595	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R7177	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6596	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7178	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6599	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7179	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6602	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7187	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6605	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7190	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6607	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7191	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6609	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7192	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6611	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6707	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7202	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6712	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7203	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6713	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7207	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6730	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7208	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6731	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7211	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6732	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6733	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7215	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6921	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7217	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6922	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7221	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6923	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7223	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6924	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7224	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R7030	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7225	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R7031	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7229	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R7032	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	R7230	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R7033	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7231	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R7034	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7232	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J
R7035	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7234	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
R7036	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7235	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R7039	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7237	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J

⚠Ref No.	Part No.	Part Name	Description Local	⚠Ref No.	Part No.	Part Name	Description Loca
R7238 R7241	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R9203 R9205	NRSA63D-302X NRSA63D-103X	MG RESISTOR MG RESISTOR	3kΩ 1/16W D 10kΩ 1/16W D
R7243 R7302	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R9206	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R7302 R7303	NRSA63J-472X NRSA63J-472X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 4.7kΩ 1/16W J	R9207 R9209	NRSA02J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/10W J 0Ω 1/16W J
R7304	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R9302	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
R7305 R7309	NRSA63J-472X NRSA63J-472X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 4.7kΩ 1/16W J	R9308 R9501	NRSA63J-0R0X NRSA63J-472X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 4.7kΩ 1/16W J
R7310	NRSA63J-101X	MG RESISTOR	4.7KΩ 1/16W J	R9502	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R7311 R7312	NRSA63J-472X NRSA63J-472X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 4.7kΩ 1/16W J	R9503 R9504	NRSA63J-393X NRSA63J-223X	MG RESISTOR MG RESISTOR	39kΩ 1/16W J 22kΩ 1/16W J
R7313	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R9505	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R7314 R7315	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	R9506 R9507	NRSA63J-223X NRSA63J-103X	MG RESISTOR MG RESISTOR	22kΩ 1/16W J 10kΩ 1/16W J
R7316	NRSA63J-101X NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R9508	NRSA63J-103X NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R7317 R7318	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	R9509 R9510	NRSA63J-103X NRSA63J-104X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 100kΩ 1/16W J
R7319	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	RA6001	NRZ0080-0R0X	NET RESISTOR	0Ω
R7320 R7321	NRSA63J-103X NRSA63J-820X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J	RA6002 RA6007	NRZ0034-0R0W	NET RESISTOR NET RESISTOR	0Ω 1/32W J x4 0Ω
R7322	NRSA63J-103X	MG RESISTOR	82Ω 1/16W J 10kΩ 1/16W J	RA6008	NRZ0080-0R0X NRZ0080-0R0X	NET RESISTOR	ÓΩ
R7324	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6009	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4 0Ω 1/32W J x4
R7325 R7327	NRSA63J-220X NRSA63J-103X	MG RESISTOR MG RESISTOR	22Ω 1/16W J 10kΩ 1/16W J	RA6010 RA6014	NRZ0034-0R0W NRZ0034-0R0W	NET RESISTOR NET RESISTOR	0Ω 1/32W J x4 0Ω 1/32W J x4
R7330	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	RA6101	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4
R7332 R7333	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	RA6102 RA6103	NRZ0080-220X NRZ0040-220X	NET RESISTOR NET RESISTOR	22Ω 22Ω 1/16W J x4
R7334	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6104	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4
R7335 R7337	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	RA6105 RA6106	NRZ0080-220X NRZ0040-220X	NET RESISTOR NET RESISTOR	22Ω 22Ω 1/16W J x4
R7339	NRSA63.I-472X	MG RESISTOR	4.7kΩ 1/16W J	RA6107	NRZ0080-220X	NET RESISTOR	22Ω
R7340 R7341	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	RA6108 RA6109	NRZ0080-220X NRZ0040-470X	NET RESISTOR NET RESISTOR	22Ω 47Ω 1/16W J x4
R7342	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6110	NRZ0080-470X	NET RESISTOR	47Ω
R7343 R7346	NRSA63J-101X NRSA63J-472X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 4.7kΩ 1/16W J	RA6111 RA6112	NRZ0040-470X NRZ0040-470X	NET RESISTOR NET RESISTOR	47Ω 1/16W J x4 47Ω 1/16W J x4
R7348	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	RA6113	NRZ0080-470X	NET RESISTOR	47Ω
R7349 R7350	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	RA6114 RA6115	NRZ0040-470X NRZ0080-470X	NET RESISTOR NET RESISTOR	47Ω 1/16W J x4 47Ω
R7351	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	RA6116	NRZ0080-470X	NET RESISTOR	47Ω
R7352 R7353	NRSA63J-273X NRSA63J-273X	MG RESISTOR MG RESISTOR	27kΩ 1/16W J 27kΩ 1/16W J	RA6401 RA6402	NRZ0080-330X NRZ0080-330X	NET RESISTOR NET RESISTOR	33Ω 33Ω
R7354	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	RA6403	NRZ0080-330X	NET RESISTOR	33Ω
R7355 R7356	NRSA63J-101X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 0Ω 1/16W J	RA6531 RA6541	NRZ0034-0R0W NRZ0033-0R0W	NET RESISTOR NET RESISTOR	0Ω 1/32W J x4 0Ω
R7358	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	RA6542	NRZ0080-0R0X	NET RESISTOR	$\Omega\Omega$
R7359 R7363	NRSA63J-0R0X NRSA63J-103X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J	RA6543 RA6544	NRZ0033-0R0W NRZ0080-0R0X	NET RESISTOR NET RESISTOR	$0\Omega \ 0\Omega$
R7364	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	RA6545	NRZ0033-0R0W	NET RESISTOR	Ω
R7365 R7366	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	RA6546 RA7202	NRZ0080-0R0X NRZ0080-473X	NET RESISTOR NET RESISTOR	0Ω 47kΩ
R7367	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	RA7203	NRZ0080-473X	NET RESISTOR	47kΩ
R7368 R7369	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	RA7204 RA7205	NRZ0080-473X NRZ0080-473X	NET RESISTOR NET RESISTOR	47kΩ 47kΩ
R7371	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	RA7503	NQR0271-004X	EMI FILTER	17102
R7372 R7501	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6101	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
R7502	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6102	NQL79GM-220X	COIL	22uH M
R7512 R7513	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6103 L6115	NQL79GM-220X NQR0499-001X	COIL FERRITE BEADS	22uH M
R7514	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6250	NQLB62J-120X	COIL	12uH J
R7515 R7523	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6253 L6254	NQLB62J-120X NRSA02J-0R0X	COIL MG RESISTOR	12uH J 0Ω 1/10W J
R7524	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6265	NQR0499-001X	FERRITE BEADS	032 1/1044 0
R7525 R7529	NRSA63J-0R0X NRSA63J-103X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J	L6266 L6402	NQR0499-001X NQL79GM-100X	FERRITE BEADS COIL	10uH M
R7530	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L6403	NQL79GM-100X	COIL	10uH M
R7532 R7533	NRSA63J-273X NRSA63J-221X	MG RESISTOR MG RESISTOR	27kΩ 1/16W J 220Ω 1/16W J	L6404 L6502	NQL79GM-100X NRSA02J-0R0X	COIL MG RESISTOR	10uH M 0Ω 1/10W J
R7544	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6521	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4
R7601 R7602	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	L6522 L6523	NRZ0034-0R0W NRZ0034-0R0W	NET RESISTOR NET RESISTOR	0Ω 1/32W J x4 0Ω 1/32W J x4
R7634	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	L6531	NQR0199-007X	FERRITE BEADS	052 1/32VV J X4
R7635 R7643	NRSA63J-102X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 0Ω 1/16W J	L6701 L6911	NQR0413-003X NQR0499-001X	EMI FILTER FERRITE BEADS	
R7658	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	L6912	NQR0499-001X	FERRITE BEADS	
R8796	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J	L6922	NQL79GM-220X	COIL COIL	22uH M
R8797 R8798	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6923 L6924	NQL79GM-220X NQL79GM-220X	COIL	22uH M 22uH M
R8799	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6925	NQL79GM-220X	COIL	22uH M
R9001 R9002	NRSA63J-473X NRSA02J-0R0X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 0Ω 1/10W J	L6931 L7301	NQR0499-001X NQR0489-002X	FERRITE BEADS FERRITE BEADS	
R9003	NRSA63D-273X	MG RESISTOR	27kΩ 1/16W D	L7302	NQR0489-002X	FERRITE BEADS	4 7
R9004 R9005	NRSA63J-684X NRSA63D-103X	MG RESISTOR MG RESISTOR	680kΩ 1/16W J 10kΩ 1/16W D	L7303 L7304	NQL092K-4R7X NQL092K-4R7X	COIL COIL	4.7uH K 4.7uH K
R9006	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	L7305	NQL092K-4R7X	COIL	4.7uH K
R9007 R9008	NRSA02J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/10W J 0Ω 1/16W J	L7306 L7307	NQL092K-4R7X NQL092K-4R7X	COIL COIL	4.7uH K 4.7uH K
R9201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	L7308	NQL092K-4R7X	COIL	4.7uH K
R9202	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	L7309	NQL092K-4R7X	COIL	4.7uH K

⚠Ref No.	Part No.	Part Name	Description Loca
L7310 L7311 L7312 L7313 L7314 L7315 L7316 L7501 L7502 L9001 L9201	NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQR0489-002X NQL092K-4R7X NQL092K-4R7X NRSA63J-0R0X NRSA63J-0R0X NQLC8CM-150X NQLC8CM-150X	COIL COIL COIL COIL FERRITE BEADS COIL COIL MG RESISTOR MG RESISTOR COIL COIL	4.7uH K 4.7uH K 4.7uH K 4.7uH K 4.7uH K 0Ω 1/16W J 0Ω 1/16W J 15uH M 15uH M
CN001 CN002 J8501 J8502 K6250 K6261 K6263	QGF0508C2-50W QGF0508C2-40W NNZ0117-001 NNZ0117-001 NRSA02J-0R0X NQR0489-002X NQR0489-002X	CONNECTOR CONNECTOR HDMI CONNECTOR HDMI CONNECTOR MG RESISTOR FERRITE BEADS FERRITE BEADS	FFC/FPC (1-50) FFC/FPC (1-40) DIGITAL IN-1 DIGITAL IN-2 0Ω 1/10W J
K6264 K6265 K6266 K6267 K6268 K6272 K6401 K6402 K6403	NQR0489-002X NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NQR0499-001X NQR0499-001X NQR0499-001X NQR0499-001X	FERRITE BEADS MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR FERRITE BEADS FERRITE BEADS FERRITE BEADS FERRITE BEADS FERRITE BEADS	0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J
K6404 K6405 K6921 K7028 K7030 K7031	NGR0499-001X NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA63J-0R0X NRSA02J-0R0X NQR0470-007X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR EMI FILTER	0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J 0Ω 1/16W J 0Ω 1/10W J
K7031 K7032 K7033 K7034 K7202 K7211 K7302	NGR0470-007X NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA63J-0R0X NGR0499-002X NGR0389-003X	EMI FILTER MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR FERRITE BEADS FERRITE BEADS	0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J 0Ω 1/16W J
K7308 K7501 K7504 LC6501 LC7505 LC9301 LC9303 LC9305 LC9306 LC9307	NRSA02J-390X NRSA02J-390X NRSA63J-0R0X NRSA63J-0R0X NQR0479-001X NQR0483-005X NQR0483-005X NQR0483-005X NQR0483-005X NQR0483-005X NQR0483-005X	MG RESISTOR FERRITE BEADS MG RESISTOR EMI FILTER	39Ω 1/10W J 0Ω 1/16W J
X6250 X7001 X7309	NAX0580-001X NAX0669-001X NAX0618-001X	CXO C RESONATOR CRYSTAL	6.000MHz

PRINTED WIRING BOARD PARTS LIST [LT-32DX7BJ, LT-32DX7SJ]

ANALO	G P.W. BOARI	D ASS'Y (SFL-1	241A-U2)	⚠Ref No.	Part No.	Part Name	Description Local
		PAGE 3-8 FOR THI		Q7301 Q9501 Q9502	2SC2412K/QR/-X UN2213-X 2SC3928A/QR/-X	CHIP TRANSISTOR DIGI TRANSISTOR TRANSISTOR	
		ASS'Y (SFL-622	•	Q9503	2SC3928A/QR/-X	TRANSISTOR	
REFER 1	ΓΟ PARTS LIST IN	PAGE 3-12 FOR TH	IIS P.W. BOARD.	D6503 D7032 D7301 D9001	MA111-X 1SS355W-X RB501V-40-X EC30HA03L-X	CHIP DIODE CHIP DIODE SB DIODE SB DIODE	
SW P.W	I. BOARD ASS	S'Y (SFL-7206A-	U2)	D9002 D9003	EC30HA03L-X PTZ3.9B-X	SB DIODE Z DIODE	
REFER 1	TO PARTS LIST IN	PAGE 3-13 FOR TH	IIS P.W. BOARD.	D9201 D9202 D9203 D9204	EC30HA03L-X EC30HA03L-X PTZ3.9B-X MA111-X	SB DIODE SB DIODE Z DIODE CHIP DIODE	
LED P.W. BOARD ASS'Y (SFL-8703A-U2)			D9501 D9502	MA111-X MA111-X	CHIP DIODE CHIP DIODE		
REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD.			C6002 C6101	NCB31CK-104X NCB30JK-225X	C CAPACITOR C CAPACITOR	0.1uF 16V K 2.2uF 6.3V K	
		ASS'Y (SFL-90	•	C6103 C6107 C6109 C6111	NCB31AK-474X NCB31AK-474X NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR C CAPACITOR C CAPACITOR	0.47uF 10V K 0.47uF 10V K 0.1uF 16V K 0.1uF 16V K
REFER 1	REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD.			C6112 C6113 C6114	NCB31CK-104X NCB31AK-474X NCB31CK-104X	C CAPACITOR C CAPACITOR C CAPACITOR	0.1uF 16V K 0.47uF 10V K 0.1uF 16V K
DC-DC	P.W. BOARD	ASS'Y (SFL-914	3A-U2)	C6116 C6117	NCB31AK-474X NCB30JK-225X	C CAPACITOR C CAPACITOR	0.47uF 10V K 2.2uF 6.3V K
REFER 1	ΓΟ PARTS LIST IN	PAGE 3-14 FOR TH	IIS P.W. BOARD.	C6118 C6119 C6121 C6122 C6123	NCB31AK-474X NCB31AK-474X NCB31AK-474X NEHL0JM-107X NCB31CK-104X	C CAPACITOR C CAPACITOR C CAPACITOR E CAPACITOR C CAPACITOR C CAPACITOR	0.47uF 10V K 0.47uF 10V K 0.47uF 10V K 100uF 6.3V M 0.1uF 16V K
DIGITA	L P.W. BOARD	ASS'Y (SFL0D	253A-U2)	C6124 C6125	NEHL0JM-107X NCB31CK-104X	E CAPACITOR C CAPACITOR	100uF 6.3V M 0.1uF 16V K
⚠Ref No.	Part No.	Part Name	Description Local	C6126 C6128	NCB30JK-225X NCB30JK-225X	C CAPACITOR C CAPACITOR	2.2uF 6.3V K 2.2uF 6.3V K
IC6001 IC6002 IC6101 IC6002 IC6101 IC6102 IC6250 IC6251 IC6401 IC6402 IC6502 IC6724 IC7033 IC7036 IC7038 IC7204 IC7203 IC7204 IC7205 IC7301 IC7203 IC7204 IC7205 IC7301 IC7301 IC7306 IC7301 IC	JCC5060 SN74LVC1G08V-X EDD1232AAFA-6B SC2595STRT-X UPC5702GS-027-X R1170H331B-X ISL98001CQZ-140 R1170H331B-X THC63LVDM83R-W S-80928CLNB-G-W CD74HC4094PW-X ADC081S021CIS-X SN74LVC2G17KE-X 39VF800A7IEKD73 M12L16161A-7TG S-80928CLNB-G-W SN74LV00APW-X SDA6000-B12 K4S641632K-UC75 CD74HC4053PW-X MM1689CH-X S-80928CLNB-G-W SN74LVC2G06K-X ATF32-32DX7BJ MM1671XN-X MP2263DN-C053-X MM1602FT-X MP2263DN-C053-X MM1701CH-X 2SA1530A/QR/-X 2SA1022/BC/-X 2SA1022/BC/-X 2SA1022/BC/-X 2SC3837K/NP/-X	IC IC IC IC(MICRO C ROM) IC	(SERVICE)	C6128 N C6130 N C6132 N C6133 N C6134 N C6135 N C6135 N C6137 N C6218 N C6236 N C6237 N C6238 N C6237 N C6241 N C6242 N C6244 N C6245 N C6246 N C6247 N C6248 N C6246 N C6247 N C6248 N C6248 N C6249 N C6250 N C6251 N C6250 N C6251 N C6252 N C6253 N C6251 N C6255 N C6255 N C6256 N C6267 N C6262 N C6267 N C6262 N C6272 N C6272 N C6272 N C6273 N C6274 N C6274 N C6276 N	NEHL1EM-226X NCB31CK-154X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31HK-104X NCB31HK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-106X NCB31AK-105X NCB31AK-105X NCB31AK-105X NCB31AK-105X NCB31AK-105X NCB31AK-105X NCB31AK-106X NCB31AK-100X NCB31CK-104X	E CAPACITOR C C C C C C C C C C C C C C C C C C C	2.2uF 6.3V K 22uF 25V M 0.15uF 16V K 10uF 10V K 0.1uF 16V K 0.1uF 16V K 0.1uF 50V K 0.1uF 50V K 0.1uF 16V K 10uF 10V K 2.2uF 10V K 3.0uF 16V K 3.0uF 10V K 3.0uF 16V K
Q6250 Q6251 Q6501 Q7030 Q7032 Q7033 Q7034 Q7035 Q7201	2SC3928A/QR/-X 2SC3928A/QR/-X 2SC3928A/QR/-X UN2213-X UN2113-X UN2113-X UN2113-X UN2113-X 2SC3928A/QR/-X	TRANSISTOR TRANSISTOR TRANSISTOR DIGI TRANSISTOR DIGI TRANSISTOR DIGI TRANSISTOR DIGI TRANSISTOR DIGI TRANSISTOR DIGI TRANSISTOR TRANSISTOR TRANSISTOR		C6277 C6278 C6279 C6280 C6282 C6283 C6284 C6285 C6286	NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X	C CAPACITOR	0.1uF 16V K 0.1uF 16V K

⚠Ref No.	Part No.	Part Name	Description Local	Ref No.	Part No.	Part Name	Description Local
C6288	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6645	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6289	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6646	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6290	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6656	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6291	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6657	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6293	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6658	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6294	NBZ0007-107X	SP E CAPACITOR	100uF	C6659	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z
C6295	NBZ0007-107X	SP E CAPACITOR	100uF	C6660	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6296	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6661	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6297	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6671	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6402	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6672	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6403	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6673	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6406	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6677	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6409	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6678	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6410	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6679	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6411	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6680	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6412	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6681	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6413	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6682	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6414	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6683	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6415	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C6684	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6416	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6685	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6417	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6686	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6418 C6419	NCB31CK-104X	C CAPACITOR	0.1uF 16V K 0.1uF 16V Z	C6687 C6688	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6420	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z	C6689	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z
C6422	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6690	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6423	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6691	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6424	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6692	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6425	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6693	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6428	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6694	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6429	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6695	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6430	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6696	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6431	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6697	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6432	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6698	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6433	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6699	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6434	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6701	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z
C6435	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6723	NCB31HK-222X	C CAPACITOR	2200pF 50V K
C6436	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6724	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6437	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6901	NBZ0007-107X	SP E CAPACITOR	100uF
C6438	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6902	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6439	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6903	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6440	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6904	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6441	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6905	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6445 C6520	NEX60GM-337X	E CAPACITOR	330uF 4V M	C6906 C6907	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6521	NCB11AK-106X NCB31CK-104X	C CAPACITOR C CAPACITOR	10uF 10V K 0.1uF 16V K	C6908	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K
C6522	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6909	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6523	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6910	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6524	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6911	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6525	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6912	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6531	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6913	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6533	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6914	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6573	NCB21CK-105X	C CAPACITOR	1uF 16V K	C6915	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6601	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6916	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6917	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6918	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6610	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6919	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6611	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6921	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6612	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6922	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6613	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6923	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6614	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6924	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6615	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6925	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6616	NCF31CZ-104X	C CAPACITOR		C6926	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6617	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	C6927	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6618	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6928	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6619	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7030	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6620	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7031	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6621	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7033	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6622	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7039	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C6623	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7040	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6624	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7044	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6625	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7051	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6626	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7052	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6627	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7053	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6628	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7054	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6629	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7055	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6630	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7056	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6631	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7057	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6632	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7058	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6633	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7059	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6634	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7060	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6635	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7061	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6636	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7062	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6637	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7063	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6638	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7064	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6639	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7065	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6640	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7066	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6641	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7067	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6642	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7068	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6643	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7073	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6644	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7202	NCB31CK-104X	C CAPACITOR	0.1uF 16V K

C728 MSS10K-18M	⚠Ref No.	Part No.	Part Name	Description Local	Ref No.	Part No.	Part Name	Description Local
C788 MCSR1CH-104K C DAM-CITOR	C7203	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
CODI NCESTOC 145K C CAPACITOR 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	C7204 C7205	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9619	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
CZ200 NCB51CX-194X C C APACTIORS 0, 10-679 K R000 NRSA63-34PRX MOR RESISTOR 0, 11/69 J L CZ21 M NCB51H K-104X C C APACTIORS 0, 10-679 K R000 NRSA63-34PRX MOR RESISTOR 220 11/69 J L CZ21 M NCB51H K-104X C C APACTIORS 0, 10-679 K R000 NRSA63-34PRX MOR RESISTOR 220 11/69 J L CZ21 M NCB51H K-104X C C APACTIORS 0, 10-679 K R000 NRSA63-34PRX MOR RESISTOR 220 11/69 J L CZ21 M NCB51H K-104X C C APACTIORS 0, 10-679 K R000 NRSA63-34PRX MOR RESISTOR 220 11/69 J L CZ21 M NCB51H K-104X C C APACTIORS 0, 10-679 K R000 NRSA63-34PRX MOR RESISTOR 0, 10-69 K R000 NRSA63-34PRX MOR RESISTOR	C7207	NCB31CK-104X	C CAPACITOR	0.1uF 16V K				
C7214 NCB51HH-G164X C CAPACITOR 0.1 LF 59V K R0000 MS6453-4PRXX MOR RESISTOR 0.1 LF 99V J R007 T STANDARD MS6453-4PRXX MOR RESISTOR 0.1 LF 99V J R007 T STANDARD MS6453-4PRXX MOR RESISTOR 0.1 LF 99V J R007 MS6453-4PRX MOR RESISTOR 0.1 LF 99V J R007 MS645	C7209	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	R6003	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7316 MCS14L4SSXX C CAPACITOR 3.36 F80 J P R031 MSRASAL90X M RESISTOR 0.1198 J P C7310 MCS14C 104X C CAPACITOR 104 F80 V K R8020 MSRASAL90X M RESISTOR 0.1198 J P C7310 MCS14C 104X C CAPACITOR 104 F80 V K R8020 MSRASAL90X M RESISTOR 0.1198 J P C7310 MCS14C 104X C CAPACITOR 104 F80 V K R8020 MSRASAL90X M RESISTOR 0.1198 J P C7310 MCS14C 104X C CAPACITOR 104 F80 V K R8020 MSRASAL90X M RESISTOR 0.1198 J P C7310 MCS14C 104X C CAPACITOR 104 F80 V K R8020 MSRASAL90X M RESISTOR 0.1198 J P C7310 MCS14C 104X C CAPACITOR 104 F80 V K R8020 MSRASAL90X M RESISTOR 0.1198 J P C7310 MCS14C 104X C CAPACITOR 104 F80 V K R8020 MSRASAL90X M M RESISTOR 0.1198 J P C7310 MCS14C 104X C CAPACITOR 104 F80 V K R8020 MSRASAL90X M M RESISTOR 0.1198 J P C7310 MCS14C 104X C CAPACITOR 104 F80 V K R8020 MSRASAL90X M M RESISTOR 0.1198 J P C7310 MCS14C 104X C CAPACITOR 104 F80 V K R8020 MSRASAL90X M M RESISTOR 0.1198 J P C7310 MCS14C 104X C CAPACITOR 104 F80 V K R8020 MSRASAL90X M M RESISTOR 0.1198 J P C7310 MCS14C 104X C CAPACITOR 104 F80 V K R8020 MSRASAL90X M M RESISTOR 0.1198 J P C7310 MCS14C 104X C CAPACITOR 104 F80 V K R8020 MSRASAL90X M M RESISTOR 0.1198 J P C7310 MCS14C 104X C CAPACITOR 104 F80 V K R8020 MSRASAL90X M M RESISTOR 0.1198 J P C7310 MCS14C 104X C CAPACITOR 104 F80 V K R8020 MSRASAL90X M M RESISTOR 0.1198 J P C7310 MCS14C 104X C CAPACITOR 104 F80 V K R8020 MSRASAL90X M M RESISTOR 0.1198 J P C7310 MCS14C 104X C CAPACITOR 104 F80 V K R8020 MSRASAL90X M M RESISTOR 0.1198 J P C7310 MSRASAL90X M M RESISTOR 0.1	C7212	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R6008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7301 MCP31C2-105X C CAPACTOR	C7214	NDC31HJ-102X	C CAPACITOR C CAPACITOR	1000pF 50V J	R6014	NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J
C7369 NOPSICZ-105X C CAPACITOR	C7301	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6018	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7369 NOPSICZ-105X C CAPACITOR	C7302 C7303	NCB11AK-106X	C CAPACITOR	10uF 10V K	R6020	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7309 NCP31C-104X C CAPACITOR	C7304 C7305	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6074	NRSA63J-0R0X	MG RESISTOR	
C7309 NCP31C2-104X C CAPACITOR	C7307		C CAPACITOR C CAPACITOR		R6075 R6080		MG RESISTOR	
C7310 NCP31CZ-104X C CAPACITOR O 10-19-VZ R6103 NR8AS3-220X MG RESISTOR 220-1196V J C7313 NCP31CZ-104X C CAPACITOR O 10-19-VZ R6106 NR8AS3-220X MG RESISTOR 220-1196V J C7313 NCP31CZ-104X C CAPACITOR O 10-19-VZ R6106 NR8AS3-20X MG RESISTOR 220-1196V J C7314 NCP31CZ-104X C CAPACITOR O 10-19-VZ R6106 NR8AS3-20X MG RESISTOR 100-1196V J R6107 NR8AS3-10X MG RESISTOR 200-1196V J R6107 NR8AS3-10X MG RESISTOR 470-1196V J R6107 NR8AS3-10X MG RESISTOR 47	C7308	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	R6101 R6102	NRSA63J-220X NRSA63J-220X	MG RESISTOR	22Ω 1/16W J 22Ω 1/16W J
C7312 NCP31CZ-194X C CAPACITOR 0.1u=10v Z Re105 R8A33_220X MG RESISTOR 220.140wJ J C7316 NCP31CZ-194X C CAPACITOR 0.1u=10v Z R8106 R8A34_20X MG RESISTOR 220.140wJ J C7316 NCP31CZ-194X C CAPACITOR 0.1u=10v Z R8106 R8A34_20X MG RESISTOR 220.140wJ J C7316 NCP31CZ-194X C CAPACITOR 0.1u=10v Z R8106 R8A34_20X MG RESISTOR 220.140wJ J C7316 NCP31CZ-194X C CAPACITOR 0.1u=10v Z R8106 R8A34_20X MG RESISTOR 220.140wJ J C7316 NCP31CZ-194X C CAPACITOR 0.1u=10v Z R8110 R8A34_20X MG RESISTOR 220.140wJ J C7326 NCP31CZ-194X C CAPACITOR 0.1u=10v Z R8110 R8A34_20X MG RESISTOR 220.140wJ J C7326 NCP31CZ-194X C CAPACITOR 0.1u=10v Z R8110 R8A34_20X MG RESISTOR 220.140wJ J C7326 NCP31CZ-194X C CAPACITOR 0.1u=10v Z R8110 R8A34_20X MG RESISTOR 220.140wJ J C7326 NCP31L=20X C CAPACITOR 0.1u=10v Z R8110 R8A34_20X MG RESISTOR 220.140wJ J C7326 NCP31L=20X C CAPACITOR 0.1u=10v Z R8110 R8A34_20X MG RESISTOR 470.140wJ J C7326 NCP31L=30X C CAPACITOR 0.1u=10v Z R8110 R8A34_20X MG RESISTOR 470.140wJ J C7326 NCP31L=30X C CAPACITOR 2.7u=10v J R8116 R8A34_20X MG RESISTOR 470.140wJ J C7326 NCP31L=30X C CAPACITOR 0.1u=10v Z R8110 R8A34_20X MG RESISTOR 470.140wJ J C7326 NCP31L=30X C CAPACITOR 0.1u=10v Z R8110 R8A34_20X MG RESISTOR 470.140wJ J C7326 NCP31L=30X C CAPACITOR 0.1u=10v Z R8110 R8A34_20X MG RESISTOR 470.140wJ J C7326 NCP31L=30X C CAPACITOR 0.1u=10v Z R8110 R8A34_20X MG RESISTOR 470.140wJ J C7326 NCP31CZ-104X C CAPACITOR 0.1u=10v Z R8110 R8A34_20X MG RESISTOR 470.140wJ J C7326 NCP31CZ-104X C CAPACITOR 0.1u=10v Z R8110 R8A34_20X MG RESISTOR 470.140wJ J C7326 NCP31CZ-104X C CAPACITOR 0.1u=10v Z R8110 R8A34_20X MG RESISTOR 470.140wJ J C7326 NCP31CZ-104X C CAPACITOR 0.1u=10v Z R8110 R8A34_20X MG RESISTOR 470.140wJ J C7326 NCP31CZ-104X C CAPACITOR 0.1u=10v Z R8110 R8A34_20X MG RESISTOR 0.1u=10v Z R8110 R8A34_20X MG RESISTOR 0.1u=10v Z R8110 R8A34_20X MG RESISTOR 0.1u=10v Z R8110 R8A34_20X MG R835_20X MG R835_	C7310	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6103	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7319 NCP31CZ-194X C CAPACITOR O 1 1 10 V K R5107 NCP31CZ-194X C CAPACITOR O 1 1 10 V K R5107 NCP31CZ-194X C CAPACITOR O 1 1 10 V K R5107 NCP31CZ-194X C CAPACITOR O 1 1 10 V K R5107 NCP31CZ-194X C CAPACITOR O 1 1 10 V Z R5111 NCP31CZ-194X C CAPACITOR O 1 1 10 V Z R5111 NCP31CZ-194X C CAPACITOR O 1 1 10 V Z R5111 NCP31CZ-194X C CAPACITOR O 1 1 10 V Z R5111 NCP31CZ-194X C CAPACITOR O 1 1 10 V Z R5111 NCP31CZ-194X C CAPACITOR O 1 1 10 V Z R5111 NCP34CZ-194X C CAPACITOR O 1 1 1 10 V Z R5111 NCP34CZ-194X C	C7312	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6105	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7319 NC5114A-100X C CAPACITOR 10g-10V K R6109 NRSA63J-220X MG RESISTOR 22g-116W J J C7319 NC513C-104X C CAPACITOR 0.1g-10V Z R6111 NRSA63J-220X MG RESISTOR 22g-116W J J C7314 NC513C-104X C CAPACITOR 0.1g-16V Z R6111 NRSA63J-220X MG RESISTOR 22g-116W J J C7324 NC513C-104X C CAPACITOR 0.1g-16V Z R6113 NRSA63J-20X MG RESISTOR 22g-116W J J C7325 NC613C-104X C CAPACITOR 0.1g-16V Z R6113 NRSA63J-470X MG RESISTOR 47g-116W J C7325 NC613H-270X C CAPACITOR 0.1g-16V Z R6113 NRSA63J-470X MG RESISTOR 47g-116W J C7325 NC613H-270X C CAPACITOR 0.1g-16V Z R6114 NRSA63J-470X MG RESISTOR 47g-116W J C7326 NC613H-270X C CAPACITOR 0.1g-16V Z R6114 NRSA63J-470X MG RESISTOR 47g-116W J C7326 NC613H-270X C CAPACITOR 3.9g-50V J R6116 NRSA63J-470X MG RESISTOR 47g-116W J C7326 NC613H-270X C CAPACITOR 0.1g-16V Z R6119 NRSA63J-470X MG RESISTOR 47g-116W J C7326 NC613H-270X C CAPACITOR 0.1g-16V Z R6119 NRSA63J-470X MG RESISTOR 47g-116W J C7326 NC613C-104X C CAPACITOR 0.1g-16V Z R6119 NRSA63J-470X MG RESISTOR 47g-116W J C7326 NC613C-104X C CAPACITOR 0.1g-16V Z R6119 NRSA63J-470X MG RESISTOR 47g-116W J C7326 NC613C-104X C CAPACITOR 0.1g-16V Z R6119 NRSA63J-470X MG RESISTOR 47g-116W J C7326 NC613C-104X C CAPACITOR 0.1g-16V Z R6119 NRSA63J-470X MG RESISTOR 47g-116W J C7326 NC613C-104X C CAPACITOR 0.1g-16V Z R6119 NRSA63J-470X MG RESISTOR 47g-116W J C7326 NRSA63J-470X MG RESISTOR 47g-116W J MG NRSA63J-470X MG RESISTOR 47g-116W J MG NRSA63J-470X MG RESISTOR 47g-116W J MG NRSA63J-470X MG NRSS65TOR 47g-116W J MG NRSA63J-470X MG NRSS65TOR 47g-116W J MG NRSA63J-470X MG NRSS65TOR 47g-116W J MG NRSA63J-470X MG NRSS6TOR 47	C7314	NCB11AK-106X	C CAPACITOR	10uF 10V K	R6107	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
C7292 NC531C-2104X C CAPACITOR 0.116-16V Z R6111 NRSA63-220X MC RESISTOR 220.116W J C729. NC531C-2104X C CAPACITOR 0.116-16V Z R6114 NRSA63-470X MC RESISTOR 471.116W J C C7365 NC531H-210X C CAPACITOR 0.016-16V Z R6114 NRSA63-470X MC RESISTOR 471.116W J C C7365 NC531H-210X C CAPACITOR 0.016-16V Z R6114 NRSA63-470X MC RESISTOR 471.116W J C C7360 NC531H-210X C CAPACITOR 326-16V J R6116 NRSA63-470X MC RESISTOR 471.116W J C C7360 NC531H-210X C CAPACITOR 0.016-16V Z R6114 NRSA63-470X MC RESISTOR 471.116W J C C7320 NC531C-2104X C CAPACITOR 0.116-16V Z R6119 NRSA63-470X MC RESISTOR 471.116W J C C7320 NC531C-2104X C CAPACITOR 0.116-16V Z R6119 NRSA63-470X MC RESISTOR 471.116W J C C7320 NC531C-2104X C CAPACITOR 0.116-16V Z R6121 NRSA63-470X MC RESISTOR 471.116W J C C7320 NRSA63-470X MC RESISTOR 472.116W J C C7320 NRSA63-470X MC RESISTOR 472	C7318	NCB11AK-106X	C CAPACITOR	10uF 10V K	R6109	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7326 MCS31H-103X C CAPACITOR 0.1µF 69V Z R6113 NRSA63J-470X MG RESISTOR 470.116W J C7252 NCS31H-103X C CAPACITOR 0.0µF 59V X R6114 NRSA63J-470X MG RESISTOR 470.116W J C7252 NCS31H-103X C CAPACITOR 0.0µF 69V Z R6116 NRSA63J-470X MG RESISTOR 470.116W J C7252 NCS31H-103X C CAPACITOR 0.0µF 16V Z R6116 NRSA63J-470X MG RESISTOR 470.116W J C7252 NCS31H-103X C CAPACITOR 0.0µF 16V Z R6116 NRSA63J-470X MG RESISTOR 470.116W J C7252 NCS31H-103X C CAPACITOR 0.0µF 16V Z R6116 NRSA63J-470X MG RESISTOR 470.116W J C7253 NCS31C-104X C CAPACITOR 0.0µF 16V Z R6116 NRSA63J-470X MG RESISTOR 470.116W J C7330 NCS31C-104X C CAPACITOR 0.0µF 16V Z R6119 NRSA63J-470X MG RESISTOR 470.116W J C7331 NCS31C-104X C CAPACITOR 0.0µF 16V Z R6120 NRSA63J-470X MG RESISTOR 470.116W J C7334 NCS31C-104X C CAPACITOR 0.0µF 16V Z R6120 NRSA63J-470X MG RESISTOR 470.116W J C7334 NCS31C-104X C CAPACITOR 0.0µF 16V Z R6120 NRSA63J-470X MG RESISTOR 470.116W J C7334 NCS31C-104X C CAPACITOR 0.0µF 16V Z R6121 NRSA63J-470X MG RESISTOR 470.116W J C7334 NCS31C-104X C CAPACITOR 0.0µF 16V Z R6121 NRSA63J-470X MG RESISTOR 470.116W J C7334 NCS31C-104X C CAPACITOR 0.0µF 16V Z R6121 NRSA63J-470X MG RESISTOR 0.0µF 16V Z R6121 NRS	C7320	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6111	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7238 NC531C.2-104X C CAPACITOR 0.1F-16V Z R8117 NRSA63J-470X MG RESISTOR 470.11/6W J C730 NC531C.2-104X C CAPACITOR 0.1F-16V Z R8118 NRSA63J-470X MG RESISTOR 470.11/6W J C730 NC531C.2-104X C CAPACITOR 0.1F-16V Z R8119 NRSA63J-470X MG RESISTOR 470.11/6W J C7331 NC531C.2-104X C CAPACITOR 0.1F-16V Z R8120 NRSA63J-470X MG RESISTOR 470.11/6W J C7331 NC531C.2-104X C CAPACITOR 0.1F-16V Z R8120 NRSA63J-470X MG RESISTOR 470.11/6W J C7334 NC531C.2-104X C CAPACITOR 0.1F-16V Z R8121 NRSA63J-470X MG RESISTOR 470.11/6W J C7334 NC531C.2-104X C CAPACITOR 0.1F-16V Z R8122 NRSA63J-470X MG RESISTOR 470.11/6W J C7334 NC531C.2-104X C CAPACITOR 0.1F-16V Z R8122 NRSA63J-470X MG RESISTOR 470.11/6W J C7334 NC531C.2-104X C CAPACITOR 0.1F-16V Z R8122 NRSA63J-470X MG RESISTOR 470.11/6W J C7338 NC531C.2-104X C CAPACITOR 0.1F-16V Z R8122 NRSA63J-470X MG RESISTOR 1.5E.11/6W J C7334 NC531C.2-104X C CAPACITOR 0.1F-16V Z R8122 NRSA63J-470X MG RESISTOR 1.5E.11/6W J C7344 NC581AK-160X C CAPACITOR 1.0F-16V M R8141 NRSA63J-470X MG RESISTOR 1.5E.11/6W J C7344 NC581AK-160X C CAPACITOR 1.0F-16V M R8201 NRSA63J-670X MG RESISTOR 0.1F-16V M R8201	C7324	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6113	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7298 NCF31CZ-104X C CAPACITOR 0.1 IF 16V Z R6117 NRSA63J-470X MG RESISTOR 470.11 INW J C739 NCF31CZ-104X C CAPACITOR 0.1 IF 16V Z R6118 NRSA63J-470X MG RESISTOR 470.11 INW J C739 NCF31CZ-104X C CAPACITOR 0.1 IF 16V Z R6119 NRSA63J-470X MG RESISTOR 470.11 INW J C739 NCF31CZ-104X C CAPACITOR 0.1 IF 16V Z R6119 NRSA63J-470X MG RESISTOR 470.11 INW J C739 NCF31CZ-104X C CAPACITOR 0.1 IF 16V Z R6122 NRSA63J-470X MG RESISTOR 470.11 INW J C739 NRSA63J-470X M	C7325 C7326	NDC31HJ-270X	C CAPACITOR	27pF 50V J	R6115	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7391 NCF31CZ-104X C CAPACITOR 0.1 II- 16 V Z R6119 NRSA63J-470X MG RESISTOR 470.1 I/16W J C7331 NCF31CZ-104X C CAPACITOR 0.1 II- 16 V Z R6121 NRSA63J-470X MG RESISTOR 470.1 I/16W J C7334 NCF31CZ-104X C CAPACITOR 0.1 II- 16 V Z R6121 NRSA63J-470X MG RESISTOR 470.1 I/16W J R61331 NCF31CZ-104X C CAPACITOR 0.1 II- 16 V Z R6121 NRSA63J-470X MG RESISTOR 470.1 I/16W J R61331 NCF31CZ-104X C CAPACITOR 0.1 II- 16 V Z R6122 NRSA63J-470X MG RESISTOR 470.1 I/16W J R61331 NCF31CZ-104X MG RESISTOR 470.1 I/16W J R61331 NCF31CZ-104X MG RESISTOR 470.1 I/16W J R61331 NCF31CZ-104X MG RESISTOR 1.0 II- 16 V Z R6121 NRSA63J-470X MG RE	C7328	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6117	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7331 NCF31CZ-104X C CAPACITOR 0.1 F16V Z R6121 NRSAS3J-470X MG RESISTOR 472 1/16W J C7355 NCF31CZ-104X C CAPACITOR 0.1 F16V Z R6127 NRSAS3J-470X MG RESISTOR 472 1/16W J C7355 NCF31CZ-104X C CAPACITOR 0.1 F16V Z R6127 NRSAS3J-470X MG RESISTOR 10.1 1/16W J C7351 NCF31CZ-104X C CAPACITOR 0.1 F16V Z R6127 NRSAS3J-470X MG RESISTOR 10.1 1/16W J C7351 NCF31CZ-104X C CAPACITOR 0.1 F16V Z R6127 NRSAS3J-470X MG RESISTOR 10.1 1/16W J C7351 NCF31CZ-104X C CAPACITOR 0.1 F16V Z R6127 NRSAS3J-100X MG RESISTOR 10.1 1/16W J C7351 NCF31CZ-104X C CAPACITOR 2.2 F6.3 VK R6201 NRSAS3J-00X MG RESISTOR 10.1 1/16W J C7354 NCF31CZ-104X C CAPACITOR 2.2 F6.3 VK R6202 NRSAS3J-00X MG RESISTOR 10.1 1/16W J C7354 NCF31CZ-104X C CAPACITOR 2.2 F6.3 VK R6203 NRSAS3J-00X MG RESISTOR 10.1 1/16W J C7354 NCF31CZ-104X C CAPACITOR 2.2 F6.3 VK R6207 NRSAS3J-00X MG RESISTOR 10.1 1/16W J C7354 NCF31CZ-104X C CAPACITOR 2.2 F6.3 VK R6207 NRSAS3J-00X MG RESISTOR 10.1 1/16W J C7354 NCF31CZ-104X C CAPACITOR 10.0 F10V K R6203 NRSAS3J-00X MG RESISTOR 10.1 1/16W J C7354 NCF31CZ-104X C CAPACITOR 10.0 F10V K R6207 NRSAS3J-00X MG RESISTOR 10.1 1/16W J C7354 NCF31CZ-104X C CAPACITOR 10.0 F10V K R6207 NRSAS3J-00X MG RESISTOR 10.1 1/16W J C7354 NCF31CZ-104X C CAPACITOR 10.0 F10V K R6207 NRSAS3J-00X MG RESISTOR 10.1 1/16W J C7354 NCF31CZ-104X C CAPACITOR 10.0 F10V K R6207 NRSAS3J-00X MG RESISTOR 10.1 1/16W J C7353 NCF31CZ-104X C CAPACITOR 10.1 F10V K R6207 NRSAS3J-00X MG RESISTOR 10.1 1/16W J C7353 NCF31CZ-104X C CAPACITOR 10.1 F10V K R6207 NRSAS3J-00X MG RESISTOR 10.1 1/16W J C7353 NCF31CZ-104X C CAPACITOR 10.1 F10V K R6207 NRSAS3J-00X MG RESISTOR 10.1 1/16W J C7353 NCF31CZ-104X C CAPACITOR 10.1 F10V K R6207 NRSAS3J-00X MG RESISTOR 10.1 1/16W J C7353 NCF31CZ-104X C CAPACITOR 10.1 F10V K R6207 NRSAS3J-00X MG RESISTOR 10.1 1/16W J C7353 NCF31CZ-104X C CAPACITOR 10.1 F10V K R6207 NRSAS3J-00X MG RESISTOR 10.1 1/16W J C7353 NCF31CZ-104X NRSAS3J-00X MG RESISTOR 10.1 1/16W J C7353 NCF31CZ-104X NRSAS3J-00X MG RESISTOR 10.1 1/16W J C7353 NCF31CZ-104X NRSAS3J-00X MG RESISTOR 1	C7330	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6119	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7341 N.B331HK-103X C.CAPACITOR 0.01L-1690 K R8213 NRSA83J-BR0X M RESISTOR 0.1116W J C7342 NCBS0LK-225X C.CAPACITOR 2.0L-16.3V K R8213 NRSA83J-BR0X M RESISTOR 0.1116W J C7342 NCBS0LK-225X C.CAPACITOR 2.0L-16.3V K R8213 NRSA83J-BR0X M RESISTOR 0.1116W J C7345 NCBS0LK-225X C.CAPACITOR 2.0L-16.3V K R8213 NRSA83J-BR0X M RESISTOR 0.1116W J C7345 NCBS0LK-225X C.CAPACITOR 2.0L-16.3V K R8213 NRSA83J-BR0X M RESISTOR 0.1116W J C7345 NCBS0LK-225X C.CAPACITOR 2.0L-16.3V K R8213 NRSA83J-BR0X M RESISTOR 0.1116W J C7345 NCBS0LK-225X C.CAPACITOR 2.0L-16.3V K R8216 NRSA83J-BR0X M RESISTOR 0.0L-116W J C7345 NCBS0LK-225X C.CAPACITOR 1.0L-14 Tol. 14	C7331 C7333	NCF31CZ-104X	C CAPACITOR		R6121		MG RESISTOR	
C7341 N.B331HK-103X C.CAPACITOR 0.01L-1690 K R8213 NRSA83J-BR0X M RESISTOR 0.1116W J C7342 NCBS0LK-225X C.CAPACITOR 2.0L-16.3V K R8213 NRSA83J-BR0X M RESISTOR 0.1116W J C7342 NCBS0LK-225X C.CAPACITOR 2.0L-16.3V K R8213 NRSA83J-BR0X M RESISTOR 0.1116W J C7345 NCBS0LK-225X C.CAPACITOR 2.0L-16.3V K R8213 NRSA83J-BR0X M RESISTOR 0.1116W J C7345 NCBS0LK-225X C.CAPACITOR 2.0L-16.3V K R8213 NRSA83J-BR0X M RESISTOR 0.1116W J C7345 NCBS0LK-225X C.CAPACITOR 2.0L-16.3V K R8213 NRSA83J-BR0X M RESISTOR 0.1116W J C7345 NCBS0LK-225X C.CAPACITOR 2.0L-16.3V K R8216 NRSA83J-BR0X M RESISTOR 0.0L-116W J C7345 NCBS0LK-225X C.CAPACITOR 1.0L-14 Tol. 14	C7334 C7335						MG RESISTOR	
C7341 NC811AK-106X C CAPACITOR 10uF 10V K R6201 NEXA63J-ORDX MG RESISTOR 01 116W J C7343 NC811AK-106X C CAPACITOR 10uF 10V K R6203 NEXA63J-ORDX MG RESISTOR 01 116W J C7343 NC811AK-106X C CAPACITOR 2.2uF 6.3V K R6204 NEXA63J-ORDX MG RESISTOR 01 116W J C7345 NC820K-225X C CAPACITOR 2.2uF 6.3V K R6204 NEXA63J-ORDX MG RESISTOR 01 116W J C7345 NC820K-225X C CAPACITOR 2.2uF 6.3V K R6204 NEXA63J-ORDX MG RESISTOR 01 116W J C7345 NC820K-225X C CAPACITOR 2.2uF 6.3V K R6207 NEXA63J-ORDX MG RESISTOR 01 116W J C7346 NC820K-225X C CAPACITOR 10uF 10V K R6207 NEXA63J-ORDX MG RESISTOR 01 116W J C7346 NC821K-104X C CAPACITOR 10uF 10V K R6207 NEXA63J-ORDX MG RESISTOR 01 116W J C7346 NC821K-104X C CAPACITOR 10uF 10V K R620 NEXA63J-ORDX MG RESISTOR 01 116W J C7350 NC831K-104X C CAPACITOR 10uF 10V K R620 NEXA63J-ORDX MG RESISTOR 01 116W J C7353 NC831EK-682X C CAPACITOR 6800p-25V K R620 NEXA63J-ORDX MG RESISTOR 01 116W J C7353 NC831EK-682X C CAPACITOR 6800p-25V K R620 NEXA63J-ORDX MG RESISTOR 01 116W J C7506 NC831HK-103X C CAPACITOR 0.0uF 50V K R6216 NEXA63J-ORDX MG RESISTOR 01 116W J C7506 NC831HK-103X C CAPACITOR 0.0uF 50V K R6217 NEXA63J-ORDX MG RESISTOR 01 116W J C7506 NC831HK-103X C CAPACITOR 0.0uF 50V K R6219 NEXA63J-ORDX MG RESISTOR 00 116W J C7500 NC831HK-103X C CAPACITOR 0.0uF 50V K R6219 NEXA63J-ORDX MG RESISTOR 00 116W J C7500 NC831HK-103X C CAPACITOR 0.0uF 50V K R6219 NEXA63J-ORDX MG RESISTOR 00 116W J C7500 NC831HK-103X C CAPACITOR 0.0uF 50V K R6230 NEXA63J-ORDX MG RESISTOR 00 116W J C7510 NC831HK-103X C CAPACITOR 0.0uF 50V K R6230 NEXA63J-ORDX MG RESISTOR 00 116W J C7510 NC831HK-103X C CAPACITOR 0.0uF 50V K R6230 NEXA63J-ORDX MG RESISTOR 00 116W J C7511 NC831HK-103X C CAPACITOR 0.0uF 50V K R6230 NEXA63J-ORDX MG RESISTOR 00 116W J C7513 NC831K-104X C CAPACITOR 0.0uF 50V K R6230 NEXA63J-ORDX MG RESISTOR 00 116W J C7515 NC831HK-103X C CAPACITOR 0.0uF 50V K R6230 NEXA63J-ORDX MG RESISTOR 00 116W J C7515 NC831HK-103X C CAPACITOR 0.0uF 50V K R6230 NEXA63J-ORDX MG RESISTOR 00 116W J C7515 NC831HK-103X C CAPACITOR 0.0uF 50V K R	C7338 C7340	NEHM1CM-106X	E CAPACITOR	10uF 16V M	R6141	NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J
C7344 NCB30JK-225X C CAPACITOR 2.2µF 6.3V K R6204 NRSA63J-R0X M RESISTOR 0Ω 1/16W J C7348 NCB30JK-225X C CAPACITOR 10µF 10V K R6208 NRSA63J-R0X M RESISTOR 0Ω 1/16W J C7348 NCB714K-100X C CAPACITOR 10µF 10V Z R6209 NRSA63J-R0X M RESISTOR 0Ω 1/16W J C7349 NCB311K-102X C CAPACITOR 100µF 50V K R6212 NRSA63J-R0X M RESISTOR 0Ω 1/16W J C7349 NCB311K-102X C CAPACITOR 100µF 50V K R6212 NRSA63J-R0X M RESISTOR 0Ω 1/16W J C7353 NCB31EK-862X C CAPACITOR 6800µF 25V K R6215 NRSA63J-R0X M RESISTOR 0Ω 1/16W J C7353 NCB31EK-862X C CAPACITOR 6800µF 25V K R6215 NRSA63J-R0X M RESISTOR 0Ω 1/16W J C7502 NCB314K-103X C CAPACITOR 0.1 µF 50V K R6216 NRSA63J-R0X M RESISTOR 0Ω 1/16W J C7506 NCB314K-103X C CAPACITOR 0.1 µF 50V K R6217 NRSA63J-R0X M RESISTOR 0Ω 1/16W J C7508 NCB314K-103X C CAPACITOR 0.1 µF 50V K R6219 NRSA63J-R0X M RESISTOR 0Ω 1/16W J C7508 NCB314K-103X C CAPACITOR 0.1 µF 50V K R6220 NRSA63J-R0X M RESISTOR 0Ω 1/16W J C7508 NCB314K-103X C CAPACITOR 0.1 µF 50V K R6220 NRSA63J-R0X M RESISTOR 0Ω 1/16W J C7508 NCB314K-103X C CAPACITOR 0.1 µF 50V K R6220 NRSA63J-R0X M RESISTOR 0Ω 1/16W J C7510 NCB314K-103X C CAPACITOR 0.1 µF 50V K R6221 NRSA63J-R0X M RESISTOR 0Ω 1/16W J C7513 NCB314K-103X C CAPACITOR 0.1 µF 16V K R6221 NRSA63J-R0X M RESISTOR 0Ω 1/16W J C7513 NCB314K-103X C CAPACITOR 0.1 µF 16V K R6221 NRSA63J-R0X M RESISTOR 0Ω 1/16W J C7513 NCB314K-103X C CAPACITOR 0.1 µF 16V K R6221 NRSA63J-R0X M RESISTOR 0Ω 1/16W J C7515 NCB314K-103X C CAPACITOR 0.1 µF 16V K R6223 NRSA63J-R0X M RESISTOR 0Ω 1/16W J C7515 NCB314K-103X C CAPACITOR 0.1 µF 16V K R6223 NRSA63J-R0X M RESISTOR 0Ω 1/16W J C7515 NCB314K-103X C CAPACITOR 0.1 µF 16V K R6223 NRSA63J-R0X M RESISTOR 0Ω 1/16W J C7515 NCB314K-103X C CAPACITOR 0.1 µF 16V K R6223 NRSA63J-R0X M RESISTOR 100Ω 1/16W J C7515 NCB314K-103X C CAPACITOR 0.1 µF 16V K R6223 NRSA63J-R0X M RESISTOR 100Ω 1/16W J C7515 NCB314K-103X C CAPACITOR 0.1 µF 16V K R6223 NRSA63J-R0X M RESISTOR 100Ω 1/16W J C7515 NCB314K-103X C CAPACITOR 0.2 µF 16V K R6224 NRSA63J-R0X M RESISTOR 100Ω 1/16W J C7515 NRSA63J-R0X M RESISTO	C7341	NCB11AK-106X	C CAPACITOR	10uF 10V K	R6201	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7348 NCF31C-104X C CAPACITOR 0.1 II- 18V Z R6209 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7350 NCF31C-2104X C CAPACITOR 0.1 II- 18V Z R6214 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7350 NCF31C-2104X C CAPACITOR 0.1 II- 18V Z R6214 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7350 NCB31EK-862X C CAPACITOR 10.1 II- 10V K R6216 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7502 NCB314K-105X C CAPACITOR 10.1 II- 10V K R6216 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7502 NCB314K-103X C CAPACITOR 10.0 II- 15V K R6216 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7507 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6219 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7507 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6219 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7510 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6230 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7510 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6231 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7511 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6231 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7511 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6231 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7514 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6232 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7515 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6235 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7515 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6235 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7517 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6235 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7517 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6235 NRSA633-JORDX MG RESISTOR 0.0 1/16W J C7520 NCF11C-2475X C CAPACITOR 0.0 II- 5V K R6236 NRSA633-JORDX MG RESISTOR 0.0 1/16W J C7520 NCF11C-2475X C CAPACITOR 0.0 II- 5V K R6236 NRSA633-JORDX MG RESISTOR 300.1 1/16W J C7520 NCF11C-2475X C CAPACITOR 0.0 II- 5V K R6236 NRSA633-JORDX MG RESISTOR 0.0 1/16W J C7520 NCF11C-2475X C CAPACITOR 0.0 II- 5V K R6236 NRSA633-JORDX MG RESISTOR 0.0 1/16W J C7520 NCF11C-2475X C CAPACITOR 0.0 II- 5V K R6236 NRSA633-JORDX MG RESISTOR 0.0 1/16W J C7520 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6248 NRSA633-JORDX MG RESISTOR 0.0 1/16	C7343 C7344	NCB11AK-106X	C CAPACITOR	10uF 10V K	R6203	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7348 NCF31C-104X C CAPACITOR 0.1 II- 18V Z R6209 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7350 NCF31C-2104X C CAPACITOR 0.1 II- 18V Z R6214 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7350 NCF31C-2104X C CAPACITOR 0.1 II- 18V Z R6214 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7350 NCB31EK-862X C CAPACITOR 10.1 II- 10V K R6216 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7502 NCB314K-105X C CAPACITOR 10.1 II- 10V K R6216 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7502 NCB314K-103X C CAPACITOR 10.0 II- 15V K R6216 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7507 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6219 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7507 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6219 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7510 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6230 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7510 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6231 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7511 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6231 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7511 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6231 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7514 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6232 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7515 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6235 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7515 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6235 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7517 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6235 NRSA633-JORDX MG RESISTOR 00.1 1/16W J C7517 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6235 NRSA633-JORDX MG RESISTOR 0.0 1/16W J C7520 NCF11C-2475X C CAPACITOR 0.0 II- 5V K R6236 NRSA633-JORDX MG RESISTOR 0.0 1/16W J C7520 NCF11C-2475X C CAPACITOR 0.0 II- 5V K R6236 NRSA633-JORDX MG RESISTOR 300.1 1/16W J C7520 NCF11C-2475X C CAPACITOR 0.0 II- 5V K R6236 NRSA633-JORDX MG RESISTOR 0.0 1/16W J C7520 NCF11C-2475X C CAPACITOR 0.0 II- 5V K R6236 NRSA633-JORDX MG RESISTOR 0.0 1/16W J C7520 NCF11C-2475X C CAPACITOR 0.0 II- 5V K R6236 NRSA633-JORDX MG RESISTOR 0.0 1/16W J C7520 NCB314K-103X C CAPACITOR 0.0 II- 5V K R6248 NRSA633-JORDX MG RESISTOR 0.0 1/16	C7345	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	R6207	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7350 NCF31C2-104X C CAPACITOR 0.1uF 16V Z R6214 NRSA63J-ORDX MG RESISTOR 00.11f6W J C7350 NCB31EK-682X C CAPACITOR 10F 10V K R6216 NRSA63J-ORDX MG RESISTOR 00.11f6W J C7502 NCB31AK-105X C CAPACITOR 10F 10V K R6216 NRSA63J-ORDX MG RESISTOR 00.11f6W J C7506 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6216 NRSA63J-ORDX MG RESISTOR 00.11f6W J C7507 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6219 NRSA63J-ORDX MG RESISTOR 00.11f6W J C7507 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6219 NRSA63J-ORDX MG RESISTOR 00.11f6W J C7510 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6230 NRSA63J-ORDX MG RESISTOR 00.11f6W J C7510 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6231 NRSA63J-ORDX MG RESISTOR 00.11f6W J C7510 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6231 NRSA63J-ORDX MG RESISTOR 00.11f6W J C7514 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6231 NRSA63J-ORDX MG RESISTOR 00.11f6W J C7514 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6233 NRSA63J-ORDX MG RESISTOR 00.11f6W J C7514 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6233 NRSA63J-ORDX MG RESISTOR 00.11f6W J C7517 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6235 NRSA63J-ORDX MG RESISTOR 00.11f6W J C7517 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6235 NRSA63J-ORDX MG RESISTOR 00.011f6W J C7517 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6235 NRSA63J-ORDX MG RESISTOR 0.0011f6W J C7517 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6236 NRSA63J-331X MG RESISTOR 0.0011f6W J C7500 NCF11C2-475X C CAPACITOR 0.01uF 50V K R6236 NRSA63J-331X MG RESISTOR 0.0011f6W J C7620 NCF11C2-475X C CAPACITOR 0.02uF 10V K R6236 NRSA63J-331X MG RESISTOR 0.0011f6W J C7620 NCF11C2-475X C CAPACITOR 0.02uF 10V K R6236 NRSA63J-331X MG RESISTOR 0.0011f6W J C7632 NCF11C2-475X C CAPACITOR 0.02uF 10V K R6241 NRSA63J-331X MG RESISTOR 0.0011f6W J C7632 NCF11C2-475X C CAPACITOR 0.02uF 10V K R6241 NRSA63J-331X MG RESISTOR 0.0011f6W J C7632 NCF11C2-475X C CAPACITOR 0.02uF 10V K R6245 NRSA63J-331X MG RESISTOR 0.0011f6W J C7632 NCF11C2-475X C CAPACITOR 0.01E 25V K R6245 NRSA63J-331X MG RESISTOR 0.0011f6W J C7632 NCF11C4-226X U CAPACITOR 0.01E 25V K R6245 NRSA63J-331X MG R	C7348	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6209	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7502 NGB31HK-103X C CAPACITOR 10	C7350	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7507 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6219 NRSA63.J-0R0X MG RESISTOR 0.0 1/16W J C7510 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6231 NRSA63.J-0R0X MG RESISTOR 0.0 1/16W J C7510 NCB31HK-103X C CAPACITOR 0.1uF 16V K R6231 NRSA63.J-0R0X MG RESISTOR 0.0 1/16W J C7514 NCB31HK-103X C CAPACITOR 0.1uF 16V K R6232 NRSA63.J-0R0X MG RESISTOR 0.0 1/16W J C7514 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6233 NRSA63.J-0R0X MG RESISTOR 0.0 1/16W J C7515 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6235 NRSA63.J-31X MG RESISTOR 0.0 1/16W J C7515 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6235 NRSA63.J-31X MG RESISTOR 3000 1/16W J C7601 NCB11CK-105X C CAPACITOR 0.1uF 50V K R6238 NRSA63.J-31X MG RESISTOR 3000 1/16W J C7601 NCB11CK-105X C CAPACITOR 1uF 16V K R6238 NRSA63.J-31X MG RESISTOR 3000 1/16W J C7620 NCB11CK-475X C CAPACITOR 4.7uF 16V Z R6239 NRSA63.J-31X MG RESISTOR 3000 1/16W J C7632 NCB14K-224X C CAPACITOR 0.22uF 10V K R6241 NRSA63.J-31X MG RESISTOR 3000 1/16W J C7632 NCB14K-224X C CAPACITOR 1000F 50V J R6242 NRSA63.J-31X MG RESISTOR 3000 1/16W J C9001 NCB11CK-105X C CAPACITOR 100F 25V K R6244 NRSA63.J-31X MG RESISTOR 3000 1/16W J C9002 NCB14K-104X C APACITOR 10uF 25V K R6244 NRSA63.J-31X MG RESISTOR 3000 1/16W J C9004 NCB14K-103X C CAPACITOR 10uF 25V K R6248 NRSA63.J-31X MG RESISTOR 3001 1/16W J C9004 NCB14K-103X C CAPACITOR 10uF 25V K R6248 NRSA63.J-31X MG RESISTOR 3001 1/16W J C9006 NDC31HJ-120X C APACITOR 0.1uF 25V K R6248 NRSA63.J-0RX MG RESISTOR 3001 1/16W J C9007 NCB14K-103X C CAPACITOR 0.1uF 25V K R6248 NRSA63.J-0RX MG RESISTOR 3001 1/16W J C9006 NDC31HJ-120X C CAPACITOR 0.1uF 25V K R6248 NRSA63.J-0RX MG RESISTOR 0.01 1/16W J C9007 NCB14K-103X C CAPACITOR 0.1uF 50V K R6252 NRSA63.J-22X MG RESISTOR 0.01 1/1	C7502	NCB31AK-105X	C CAPACITOR	1uF 10V K	R6216	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7510 NCB31HK-103X C CAPACITOR 0.1 uF 16 V K R6231 NRSA63J-ORDX MG RESISTOR 0.1 uF 16 V K R6232 NRSA63J-ORDX MG RESISTOR 0.1 uF 16 V K R6233 NRSA63J-ORDX MG RESISTOR 0.1 uF 16 V K R6233 NRSA63J-ORDX MG RESISTOR 0.0 uF 16 V J V J V J V J V J V J V J V J V J V	C7507	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6219	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7514 NCB31HK-103X C CAPACITOR O.01uF 50V K R6235 NRSA63J-0R0X MG RESISTOR O.011/16W J C7517 NCB31HK-103X C CAPACITOR O.01uF 50V K R6236 NRSA63J-101X MG RESISTOR 330Ω 1/16W J C7517 NCB31HK-103X C CAPACITOR O.01uF 50V K R6236 NRSA63J-331X MG RESISTOR 330Ω 1/16W J C7601 NCB11CK-105X C CAPACITOR O.01uF 50V K R6238 NRSA63J-331X MG RESISTOR 330Ω 1/16W J C7620 NCB11CK-105X C CAPACITOR O.01uF 50V K R6238 NRSA63J-331X MG RESISTOR 330Ω 1/16W J C7632 NCB314K-224X C CAPACITOR O.22uF 10V K R6241 NRSA63J-101X MG RESISTOR 330Ω 1/16W J C7632 NCB314K-224X C CAPACITOR O.22uF 10V K R6241 NRSA63J-101X MG RESISTOR 330Ω 1/16W J C9001 NCB31HK-108X-U C CAPACITOR O.1uF 25V K R6242 NRSA63J-31X MG RESISTOR 330Ω 1/16W J C9002 NCL41EK-106X-U C CAPACITOR O.1uF 25V K R6244 NRSA63J-101X MG RESISTOR 330Ω 1/16W J C9003 NCB31EK-104X C CAPACITOR O.1uF 25V K R6245 NRSA63J-31X MG RESISTOR 330Ω 1/16W J C9004 NCB31HK-103X C CAPACITOR O.1uF 25V K R6245 NRSA63J-473X MG RESISTOR 330Ω 1/16W J C9005 NCJ41CK-226X-U C CAPACITOR O.1uF 25V K R6249 NRSA63J-333X MG RESISTOR 330Ω 1/16W J C9006 NCJ31HJ-120X C CAPACITOR O.1uF 25V K R6249 NRSA63J-333X MG RESISTOR O.11/16W J C9006 NCJ31HJ-120X C CAPACITOR O.1uF 25V K R6249 NRSA63J-30RX MG RESISTOR O.11/16W J C9007 NCB31HK-103X C CAPACITOR O.1uF 50V K R6251 NRSA63J-0R0X MG RESISTOR O.11/16W J C9007 NCB31HK-103X C CAPACITOR O.1uF 50V K R6251 NRSA63J-10RX MG RESISTOR O.11/16W J C9007 NCB31HK-103X C CAPACITOR O.1uF 50V K R6251 NRSA63J-10RX MG RESISTOR O.11/16W J C9101 NCB11CK-475X C CAPACITOR O.1uF 50V K R6255 NRSA63J-16XX MG RESISTOR O.11/16W J C9103 NCB11CK-226X-U C CAPACITOR O.1uF 50V K R6255 NRSA63J-15XX MG RESISTOR O.11/16W J C9103 NCB11CK-226X-U C CAPACITOR O.1uF 50V K R6256 NRSA63J-12XX MG RESISTOR O.11/16W J C9206 NCJ41HCK-126X-U	C7510	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6231	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7517 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6236 NRSA63J-331X MG RESISTOR 3300.11/6W J C7620 NCF11CZ-475X C CAPACITOR 1.0F 16V K R6238 NRSA63J-101X MG RESISTOR 3300.11/6W J C7632 NCB314K-224X C CAPACITOR 0.22uF 10V K R6241 NRSA63J-101X MG RESISTOR 3300.11/6W J C7632 NCB314K-224X C CAPACITOR 0.22uF 10V K R6241 NRSA63J-101X MG RESISTOR 3300.11/6W J C7632 NCB314K-224X C CAPACITOR 0.22uF 10V K R6241 NRSA63J-31X MG RESISTOR 3300.11/6W J C7632 NCB314K-104X C CAPACITOR 1000pF 50V J R6242 NRSA63J-331X MG RESISTOR 3300.11/6W J C7632 NCB314K-103X C CAPACITOR 10uF 25V K R6244 NRSA63J-101X MG RESISTOR 3300.11/6W J C7632 NCB314K-103X C CAPACITOR 0.1uF 25V K R6244 NRSA63J-331X MG RESISTOR 3300.11/6W J C7632 NCB314K-103X C CAPACITOR 0.1uF 25V K R6245 NRSA63J-331X MG RESISTOR 3300.11/6W J C7632 NCB314K-103X C CAPACITOR 0.1uF 50V K R6248 NRSA63J-333X MG RESISTOR 3700.11/6W J C7632 NCB314K-103X C CAPACITOR 22uF 16V K R6249 NRSA63J-0R0X MG RESISTOR 3300.11/6W J C7632 NCB314K-103X C CAPACITOR 0.01uF 50V K R6252 NRSA63J-0R0X MG RESISTOR 0.011/6W J C7632 NCB314K-103X C CAPACITOR 0.01uF 50V K R6252 NRSA63J-0R0X MG RESISTOR 0.011/6W J C7632 NCB314K-103X C CAPACITOR 0.01uF 50V K R6253 NRSA63J-0R0X MG RESISTOR 0.011/6W J C7632 NCB314K-103X C CAPACITOR 0.01uF 50V K R6254 NRSA63J-0R0X MG RESISTOR 0.011/6W J C7632 NCB314K-103X C CAPACITOR 0.01uF 50V K R6254 NRSA63J-0R0X MG RESISTOR 0.011/6W J C7632 NCB314K-103X C CAPACITOR 0.01uF 50V K R6254 NRSA63J-0R0X MG RESISTOR 0.011/6W J C7632 NCB314K-103X C CAPACITOR 0.01uF 50V K R6255 NRSA63J-0R0X MG RESISTOR 0.011/6W J C7632 NCB314K-103X C CAPACITOR 0.01uF 50V K R6256 NRSA63J-0R0X MG RESISTOR 0.011/6W J C7632 NCB314K-103X C CAPACITOR 0.01uF 50V K R6261 NRSA63J-0R0X MG RESISTOR 0.01	C7514	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6233	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7620 NCF11CZ-475X C CAPACITOR 4,7uF 16V Z R6239 NRSA63J-331X MG RESISTOR 330Ω 1/16W J C7632 NCB31AK-224X C CAPACITOR 0.22uF 10V K R6241 NRSA63J-101X MG RESISTOR 1000 1/16W J C9001 NDC31HJ-102X C CAPACITOR 1000P5 50V J R6242 NRSA63J-331X MG RESISTOR 330Ω 1/16W J C9003 NCB31EK-104X C CAPACITOR 0.1uF 25V K R6244 NRSA63J-331X MG RESISTOR 330Ω 1/16W J C9003 NCB31EK-104X C CAPACITOR 0.1uF 25V K R6245 NRSA63J-331X MG RESISTOR 330Ω 1/16W J C9004 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6248 NRSA63J-331X MG RESISTOR 330Ω 1/16W J C9005 NCJ31HJ-120X C CAPACITOR 22uF 16V K R6249 NRSA63J-331X MG RESISTOR 330Ω 1/16W J C9007 NCB31HK-103X C CAPACITOR 12pF 50V J R6251 NRSA63J-331X MG RESISTOR 00 1/16W J C9010 NCJ41CK-226X-U C CAPACITOR 12p	C7517	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6236	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C9001 NDC31HJ-102X C CAPACITOR 1000pF 50V J R6242 NRSA63J-331X MG RESISTOR 330Ω 1/16W J C9002 NCJ41EK-106X-U C CAPACITOR 10uF 25V K R6244 NRSA63J-31X MG RESISTOR 310Ω 1/16W J C9003 NCB31EK-104X C CAPACITOR 0.1uF 25V K R6245 NRSA63J-331X MG RESISTOR 330Ω 1/16W J C9004 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6248 NRSA63J-33X MG RESISTOR 47kΩ 1/16W J C9005 NCJ41CK-226X-U C CAPACITOR 22uF 16V K R6249 NRSA63J-333X MG RESISTOR 30Ω 1/16W J C9007 NCB31HK-103X C CAPACITOR 12pF 50V J R6251 NRSA63J-0R0X MG RESISTOR 0Ω 1/16W J C9010 NCJ41CK-226X-U C CAPACITOR 0.01uF 50V K R6252 NRSA63J-0R0X MG RESISTOR 0Ω 1/16W J C9101 NCB11CK-226X-U C CAPACITOR 2.2uF 16V K R6253 NRSA63J-0R0X MG RESISTOR 2.2kΩ 1/16W J C9103 NCB11CK-226X-U C CAPACITOR	C7620	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	R6239	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C9003 NCB31EK-104X C CAPACITOR 0.1uF 25V K R6245 NRSA63J-331X MG RESISTOR 330Ω 1/16W J C9004 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6248 NRSA63J-333X MG RESISTOR 37kΩ 1/16W J C9005 NLCJATCK-226X-U C CAPACITOR 22uF 16V K R6249 NRSA63J-333X MG RESISTOR 33kΩ 1/16W J C9006 NDC31HJ-120X C CAPACITOR 12pF 50V J R6251 NRSA63J-30R0X MG RESISTOR 0Ω 1/16W J C9007 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6252 NRSA63J-9R0X MG RESISTOR 0Ω 1/16W J C9010 NCB41CK-226X-U C CAPACITOR 22uF 16V K R6253 NRSA63J-222X MG RESISTOR 2.2kΩ 1/16W J C9103 NCB11CK-25X C C CAPACITOR 2.2uF 16V K R6254 NRSA63J-22X MG RESISTOR 4.7kΩ 1/16W J C9201 NDC31HJ-102X C C CAPACITOR 2.2uF 16V K R6255 NRSA63J-22X MG RESISTOR 2.2kΩ 1/16W J C9202 NCJ41CK-26X-U C CAPACITOR <t< td=""><td>C9001</td><td>NDC31HJ-102X</td><td>C CAPACITOR</td><td>1000pF 50V J</td><td>R6242</td><td>NRSA63J-331X</td><td>MG RESISTOR</td><td>330Ω 1/16W J</td></t<>	C9001	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	R6242	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C9005 NCJ41CK-226X-U C CAPACITOR 22uF 16V K R6249 NRSA63J-333X MG RESISTOR 33kΩ 1/16W J C9006 NDC31HJ-120X C CAPACITOR 12pF 50V J R6251 NRSA63J-0R0X MG RESISTOR 0Ω 1/16W J C9007 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6252 NRSA63J-0R0X MG RESISTOR 0Ω 1/16W J C9010 NCJ41CK-226X-U C CAPACITOR 22uF 16V K R6253 NRSA63J-222X MG RESISTOR 2.2kΩ 1/16W J C9101 NCB11CK-475X C CAPACITOR 4.7uF 16V K R6254 NRSA63J-151X MG RESISTOR 150Ω 1/16W J C9203 NCB11CK-225X C CAPACITOR 2.2uF 16V K R6255 NRSA63J-151X MG RESISTOR 4.7kΩ 1/16W J C9201 NCJ31HL-102X C CAPACITOR 100pF 50V J R6256 NRSA63J-17EX MG RESISTOR 0.0116W J C9204 NCB31HK-103X C CAPACITOR 10uF 25V K R6257 NRSA63J-151X MG RESISTOR 2.2kΩ 1/16W J C9205 NCJ41CK-226X-U C CAPACITOR 2.2uF							MG RESISTOR MG RESISTOR	
C9007 NCB31HK-103X C CAPACITOR 0.01 μF 50V K R6252 NRSA63J-0R0X MG RESISTOR 0.0 1/16W J C9010 NCJ41CK-226X-U C CAPACITOR 22 μF 16V K R6253 NRSA63J-222X MG RESISTOR 2.2 kΩ 1/16W J C9101 NCB11CK-475X C CAPACITOR 4.7 μF 16V K R6254 NRSA63J-151X MG RESISTOR 150Ω 1/16W J C9103 NCB11CK-225X C CAPACITOR 2.2 μF 16V K R6255 NRSA63J-472X MG RESISTOR 4.7 kΩ 1/16W J C9201 NDC31HJ-102X C CAPACITOR 1000pF 50V J R6256 NRSA63J-0R0X MG RESISTOR 0.0 1/16W J C9202 NCJ41EK-106X-U C CAPACITOR 10 μF 25V K R6257 NRSA63J-222X MG RESISTOR 2.2 kΩ 1/16W J C9204 NCB31HK-103X C CAPACITOR 0.01μF 50V K R6258 NRSA63J-472X MG RESISTOR 150Ω 1/16W J C9205 NCJ41CK-226X-U C CAPACITOR 12pF 50V J R6260 NRSA63J-0R0X MG RESISTOR 0.0 1/16W J C9207 NCB31HK-153X C C CAPACITOR								
C9010 NCJ41CK-226X-U C CAPACITOR 22uF 16V K R6253 NRSA63J-222X MG RESISTOR 2.2kΩ 1/16W J C9101 NCB11CK-475X C CAPACITOR 4.7uF 16V K R6254 NRSA63J-151X MG RESISTOR 150Ω 1/16W J C9103 NCB11CK-225X C CAPACITOR 2.2uF 16V K R6255 NRSA63J-472X MG RESISTOR 4.7kΩ 1/16W J C9201 NDC31HJ-102X C CAPACITOR 1000pF 50V J R6256 NRSA63J-0R0X MG RESISTOR 0.01/16W J C9202 NCJ41EK-106X-U C CAPACITOR 10uF 25V K R6257 NRSA63J-222X MG RESISTOR 2.2kΩ 1/16W J C9204 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6258 NRSA63J-222X MG RESISTOR 2.2kΩ 1/16W J C9205 NCJ41CK-226X-U C CAPACITOR 0.01uF 50V K R6259 NRSA63J-472X MG RESISTOR 4.7kΩ 1/16W J C9206 NDC31HJ-120X C CAPACITOR 12pF 50V J R6260 NRSA63J-472X MG RESISTOR 0.01/16W J C9207 NCB31HK-153X C CAPACITOR <					R6251 R6252			
C9103 NCB11CK-225X C CAPACITOR 2.2uF 16V K R6255 NRSA63J-472X MG RESISTOR 4.7kΩ 1/16W J C9201 NDC31HJ-102X C CAPACITOR 1000pF 50V J R6256 NRSA63J-0R0X MG RESISTOR 2.2kΩ 1/16W J C9202 NCJ41EK-106X-U C CAPACITOR 10uF 25V K R6257 NRSA63J-222X MG RESISTOR 2.2kΩ 1/16W J C9204 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6258 NRSA63J-151X MG RESISTOR 4.7kΩ 1/16W J C9205 NCJ41CK-226X-U C CAPACITOR 22uF 16V K R6259 NRSA63J-472X MG RESISTOR 4.7kΩ 1/16W J C9206 NDC31HJ-120X C CAPACITOR 12pF 50V J R6260 NRSA63J-0R0X MG RESISTOR 0Ω 1/16W J C9207 NCB31HK-153X C CAPACITOR 0.015uF 50V K R6261 NRSA63J-222X MG RESISTOR 2.2kΩ 1/16W J C9208 NCJ41CK-226X-U C CAPACITOR 0.015uF 50V K R6261 NRSA63J-151X MG RESISTOR 150Ω 1/16W J C9211 NCB31HK-473X C CAPACITOR	C9010		C CAPACITOR	22uF 16V K	R6253			
C9202 NCJ41EK-106X-U C CAPACITOR 10 uF 25V K R6257 NRSA63J-222X MG RESISTOR 2.2kΩ 1/16W J C9204 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6258 NRSA63J-151X MG RESISTOR 150Ω 1/16W J C9205 NCJ41CK-226X-U C CAPACITOR 22uF 16V K R6259 NRSA63J-472X MG RESISTOR 4.7kΩ 1/16W J C9206 NDC31HJ-120X C CAPACITOR 12pF 50V J R6260 NRSA63J-0R0X MG RESISTOR 0.01/16W J C9207 NCB31HK-153X C CAPACITOR 0.015uF 50V K R6261 NRSA63J-222X MG RESISTOR 2.2kΩ 1/16W J C9208 NCJ41CK-226X-U C CAPACITOR 22uF 16V K R6262 NRSA63J-222X MG RESISTOR 2.2kΩ 1/16W J C9211 NCB31HK-473X C CAPACITOR 2.04F 16V K R6262 NRSA63J-151X MG RESISTOR 4.7kΩ 1/16W J C9302 NCB11CK-475X C CAPACITOR 4.7uF 16V K R6264 NRSA63J-0R0X MG RESISTOR 0.01/16W J C9303 NCB31HK-103X C CAPACITOR <	C9103	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	R6255	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C9205 NCJ41CK-226X-U C CAPACITOR 22uF 16V K R6259 NRSA63J-472X MG RESISTOR 4.7kΩ 1/16W J C9206 NDC31HJ-120X C CAPACITOR 12pF 50V J R6260 NRSA63J-0R0X MG RESISTOR 0Ω 1/16W J C9207 NCB31HK-153X C CAPACITOR 0.015uF 50V K R6261 NRSA63J-222X MG RESISTOR 2.2kΩ 1/16W J C9208 NCJ41CK-226X-U C CAPACITOR 22uF 16V K R6262 NRSA63J-151X MG RESISTOR 150Ω 1/16W J C9211 NCB31HK-473X C CAPACITOR 0.047uF 50V K R6263 NRSA63J-472X MG RESISTOR 4.7kΩ 1/16W J C9302 NCB11CK-475X C CAPACITOR 4.7uF 16V K R6264 NRSA63J-0R0X MG RESISTOR 0Ω 1/16W J C9303 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6264 NRSA63J-103X MG RESISTOR 10kΩ 1/16W J C9304 NCB11CK-475X C CAPACITOR 4.7uF 16V K R6266 NRSA63J-103X MG RESISTOR 220Ω 1/16W J C9306 NRSA63J-0R0X MG RESISTOR <td< td=""><td>C9202</td><td>NCJ41EK-106X-U</td><td>C CAPACITOR</td><td>10uF 25V K</td><td>R6257</td><td>NRSA63J-222X</td><td>MG RESISTOR</td><td>2.2kΩ 1/16W J</td></td<>	C9202	NCJ41EK-106X-U	C CAPACITOR	10uF 25V K	R6257	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C9207 NCB31HK-153X C CAPACITOR 0.015ūF 50V K R6261 NRSA63J-222X MG RESISTOR 2.2kΩ 1/16W J C9208 NCJ41CK-226X-U C CAPACITOR 22uF 16V K R6262 NRSA63J-151X MG RESISTOR 150Ω 1/16W J C9211 NCB31HK-473X C CAPACITOR 0.047uF 50V K R6263 NRSA63J-472X MG RESISTOR 4.7kΩ 1/16W J C9302 NCB11CK-475X C CAPACITOR 4.7uF 16V K R6264 NRSA63J-0R0X MG RESISTOR 0Ω 1/16W J C9303 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6265 NRSA63J-103X MG RESISTOR 10kΩ 1/16W J C9304 NCB11CK-475X C CAPACITOR 4.7uF 16V K R6266 NRSA63J-221X MG RESISTOR 20Ω 1/16W J C9306 NRSA63J-0R0X MG RESISTOR 0Ω 1/16W J R6267 NRSA63J-472X MG RESISTOR 4.7kΩ 1/16W J C9501 NCB31CK-105X C CAPACITOR 1uF 16V K R6268 NRSA63D-242X MG RESISTOR 2.4kΩ 1/16W D	C9205	NCJ41CK-226X-U	C CAPACITOR	22uF 16V K	R6259	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C9211 NCB31HK-473X C CAPACITOR 0.047uF 50V K R6263 NRSA63J-472X MG RESISTOR 4.7kΩ 1/16W J C9302 NCB11CK-475X C CAPACITOR 4.7uF 16V K R6264 NRSA63J-0R0X MG RESISTOR 0Ω 1/16W J C9303 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6265 NRSA63J-0R0X MG RESISTOR 10kΩ 1/16W J C9304 NCB11CK-475X C CAPACITOR 4.7uF 16V K R6266 NRSA63J-221X MG RESISTOR 220Ω 1/16W J C9306 NRSA63J-0R0X MG RESISTOR 0Ω 1/16W J R6267 NRSA63J-472X MG RESISTOR 4.7kΩ 1/16W J C9501 NCB31CK-105X C CAPACITOR 1uF 16V K R6268 NRSA63D-242X MG RESISTOR 2.4kΩ 1/16W D	C9207	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	R6261	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C9303 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6265 NRSA63J-103X MG RESISTOR 10kΩ 1/16W J C9304 NCB11CK-475X C CAPACITOR 4.7uF 16V K R6266 NRSA63J-221X MG RESISTOR 220Ω 1/16W J C9306 NRSA63J-0R0X MG RESISTOR 0Ω 1/16W J R6267 NRSA63J-472X MG RESISTOR 4.7kΩ 1/16W J C9501 NCB31CK-105X C CAPACITOR 1uF 16V K R6268 NRSA63J-242X MG RESISTOR 2.4kΩ 1/16W D	C9211	NCB31HK-473X	C CAPACITOR	0.047uF 50V K	R6263	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C9306 NRSA63J-0R0X MG RESISTOR 0Ω 1/16W J R6267 NRSA63J-472X MG RESISTOR 4.7kΩ 1/16W J C9501 NCB31CK-105X C CAPACITOR 1uF 16V K R6268 NRSA63D-242X MG RESISTOR 2.4kΩ 1/16W D	C9303	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6265	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C9501 NCB31CK-105X C CAPACITOR 1μF 16V K R6268 NRSA63D-242X MG RESISTOR 2.4kΩ 1/16W D C9502 NCB31CK-105X C CAPACITOR 1μF 16V K R6269 NRSA63D-242X MG RESISTOR 2.4kΩ 1/16W D	C9306	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R6267	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
	C9501 C9502							

∆Ref No.	Part No.	Part Name	Description Local	ÆRef No.	Part No.	Part Name	Description Local
R6270	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	R7042	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
R6271 R6274	NRSA63D-242X NRSA63J-220X	MG RESISTOR MG RESISTOR	2.4kΩ 1/16W D 22Ω 1/16W J	R7043 R7045	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6274 R6275	NRSA63J-220X NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7046	NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J
R6276 R6279	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7047 R7049	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6280	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	R7051	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6282 R6283	NRSA63J-331X NRSA63J-101X	MG RESISTOR MG RESISTOR	330Ω 1/16W J 100Ω 1/16W J	R7052 R7054	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6284 R6285	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7055 R7056	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J
R6286	NRSA63J-391X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 390Ω 1/16W J	R7050 R7057	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6287 R6288	NRSA63J-391X NRSA63J-391X	MG RESISTOR MG RESISTOR	390Ω 1/16W J 390Ω 1/16W J	R7058 R7059	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6289	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7060	NRSA63J-154X	MG RESISTOR	150kΩ 1/16W J
R6291 R6292	NRSA63J-473X NRSA63J-473X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 47kΩ 1/16W J	R7061 R7062	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6294 R6295	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7063	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6295 R6296	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7064 R7065	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J
R6297	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7066	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
R6298 R6299	NRSA63J-0R0X NRSA63J-220X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 22Ω 1/16W J	R7067 R7068	NRSA63J-562X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	5.6kΩ 1/16W J 0Ω 1/16W J
R6401	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7069	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6402 R6403 R6404	NRSA63J-473X NRSA63J-471X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 470Ω 1/16W J	R7070 R7071	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6404	NRSA63,I-101X	MG RESISTOR	100Ω 1/16W J	R7077	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R6405 R6408	NRSA63J-103X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 0Ω 1/16W J	R7078 R7081	NRSA63J-102X NRSA63J-473X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 47kΩ 1/16W J
R6409	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7084	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R6410 R6411	NRSA63J-100X NRSA63J-100X	MG RESISTOR MG RESISTOR	10Ω 1/16W J 10Ω 1/16W J	R7085 R7086	NRSA63J-221X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	220Ω 1/16W J 0Ω 1/16W J
R6412 R6414	NRSA63J-103X NRSA63J-102X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 1kΩ 1/16W J	R7087 R7089	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6415 R6416	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7090	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6416 R6417	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	R7091 R7094	NRSA63J-0R0X NRSA63J-101X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 100Ω 1/16W J
R6419	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	R7095	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6421 R6423	NRSA63J-330X NRSA63J-103X	MG RESISTOR MG RESISTOR	33Ω 1/16W J 10kΩ 1/16W J	R7097 R7098	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6424	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	R7099	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6425 R6426	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7100 R7103	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6427	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7106	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6428 R6503	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7107 R7109	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6521	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7110	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6522 R6523	NRSA63J-101X NRSA63J-102X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 1kΩ 1/16W J	R7112 R7113	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6524 R6525	NRSA63J-102X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 0Ω 1/16W J	R7119 R7123	NRSA63J-102X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 0Ω 1/16W J
R6529	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7124	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6531 R6532	NRSA63J-102X NRSA63J-102X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 1kΩ 1/16W J	R7125 R7127	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6534	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7128	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6536 R6537	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7131 R7157	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6538	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7170	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6539 R6569	NRSA63J-473X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 0Ω 1/16W J	R7173 R7174	NRSA63J-0R0X NRSA63J-473X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 47kΩ 1/16W J
R6575 R6576	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7175 R7176	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6595	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R7177	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6596 R6599	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	R7178 R7179	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6602	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7187	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6605 R6607	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	R7190 R7191	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6609	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7192	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6611 R6707	NRSA63J-102X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 0Ω 1/16W J	R7201 R7202	NRSA63J-473X NRSA63J-473X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 47kΩ 1/16W J
R6712	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7203	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6713 R6730	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7207 R7208	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6731 R6732	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7211 R7214	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6733	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7214 R7215	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6921 R6922	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7217 R7221	NRSA63J-473X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 0Ω 1/16W J
R6923	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7223	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6924 R7030	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7224 R7225	NRSA63J-473X NRSA63J-473X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 47kΩ 1/16W J
R7031	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7229	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R7032 R7033	NRSA63J-151X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	150Ω 1/16W J 0Ω 1/16W J	R7230 R7231	NRSA63J-472X NRSA63J-223X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 22kΩ 1/16W J
R7034	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7232	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J
R7035 R7036	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7234 R7235	NRSA63J-682X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	6.8kΩ 1/16W J 0Ω 1/16W J
R7039	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7237	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
R7041	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7238	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J

⚠Ref No.	Part No.	Part Name	Description Local	⚠Ref No.	Part No.	Part Name	Description Loca
R7241 R7243	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R9202 R9203	NRSA02J-0R0X NRSA63D-302X	MG RESISTOR MG RESISTOR	0Ω 1/10W J 3kΩ 1/16W D
R7302	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R9205	NRSA63D-103X	MG RESISTOR	10kΩ 1/16W D
R7303 R7304	NRSA63J-472X NRSA63J-472X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 4.7kΩ 1/16W J	R9206 R9207	NRSA63J-332X NRSA02J-0R0X	MG RESISTOR MG RESISTOR	3.3kΩ 1/16W J 0Ω 1/10W J
R7305	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R9209	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R7309	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R9302 R9308	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
R7310 R7311	NRSA63J-101X NRSA63J-472X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 4.7kΩ 1/16W J	R9501	NRSA63J-0R0X NRSA63J-472X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 4.7kΩ 1/16W J
R7312	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R9502 R9503	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R7313 R7314	NRSA63J-103X NRSA63J-101X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 100Ω 1/16W J	R9503 R9504	NRSA63J-393X NRSA63J-223X	MG RESISTOR MG RESISTOR	39kΩ 1/16W J 22kΩ 1/16W J
R7315	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R9505	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R7316 R7317	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	R9506 R9507	NRSA63J-223X NRSA63J-103X	MG RESISTOR MG RESISTOR	22kΩ 1/16W J 10kΩ 1/16W J
R7318	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R9508	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R7319	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R9509	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R7320 R7321	NRSA63J-103X NRSA63J-820X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 82Ω 1/16W J	R9510 RA6001	NRSA63J-104X NRZ0080-0R0X	MG RESISTOR NET RESISTOR	100kΩ 1/16W J 0Ω
R7322	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	RA6002	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4
R7323 R7324	NRSA63J-103X NRSA63J-101X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 100Ω 1/16W J	RA6007 RA6008	NRZ0080-0R0X NRZ0080-0R0X	NET RESISTOR NET RESISTOR	$\Omega\Omega$ $\Omega\Omega$
R7325	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	RA6009	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4
R7327	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J	RA6010 RA6014	NRZ0034-0R0W NRZ0034-0R0W	NET RESISTOR NET RESISTOR	0Ω 1/32W J x4 0Ω 1/32W J x4
R7330 R7332	NRSA63J-103X NRSA63J-101X	MG RESISTOR	10kΩ 1/16W J 100Ω 1/16W J	RA6101	NRZ0034-0R0VV NRZ0040-220X	NET RESISTOR NET RESISTOR	22Ω 1/16W J x4
R7333	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6102	NRZ0080-220X	NET RESISTOR	22Ω
R7334 R7335	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	RA6103 RA6104	NRZ0040-220X NRZ0040-220X	NET RESISTOR NET RESISTOR	22Ω 1/16W J x4 22Ω 1/16W J x4
R7337	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6105	NRZ0080-220X	NET RESISTOR	22Ω
R7339 R7340	NRSA63J-472X NRSA63J-101X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 100Ω 1/16W J	RA6106 RA6107	NRZ0040-220X NRZ0080-220X	NET RESISTOR NET RESISTOR	22Ω 1/16W J x4 22Ω
R7341	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6107	NRZ0080-220X NRZ0080-220X	NET RESISTOR	22Ω 22Ω
R7342	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6109	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4
R7343 R7346	NRSA63J-101X NRSA63J-472X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 4.7kΩ 1/16W J	RA6110 RA6111	NRZ0080-470X NRZ0040-470X	NET RESISTOR NET RESISTOR	47Ω 47Ω 1/16W J x4
R7347	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	RA6112	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4
R7348 R7349	NRSA63J-0R0X NRSA63J-103X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J	RA6113 RA6114	NRZ0080-470X NRZ0040-470X	NET RESISTOR NET RESISTOR	47Ω 47Ω 1/16W J x4
R7349 R7350	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	RA6114 RA6115	NRZ0040-470X NRZ0080-470X	NET RESISTOR	47Ω 1/10W J X4 47Ω
R7351	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	RA6116	NRZ0080-470X	NET RESISTOR	47Ω
R7352 R7353	NRSA63J-273X NRSA63J-273X	MG RESISTOR MG RESISTOR	27kΩ 1/16W J 27kΩ 1/16W J	RA6401 RA6402	NRZ0080-330X NRZ0080-330X	NET RESISTOR NET RESISTOR	33Ω 33Ω
R7354	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	RA6403	NRZ0080-330X	NET RESISTOR	33Ω
R7355	NRSA63J-101X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 0Ω 1/16W J	RA6531 RA6541	NRZ0034-0R0W NRZ0033-0R0W	NET RESISTOR NET RESISTOR	0Ω 1/32W J x4 0Ω
R7356 R7358	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	RA6542	NRZ0080-0R0X	NET RESISTOR	$\Omega\Omega$
R7359	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	RA6543 RA6544	NRZ0033-0R0W	NET RESISTOR	0Ω
R7363 R7364	NRSA63J-103X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 0Ω 1/16W J	RA6545	NRZ0080-0R0X NRZ0033-0R0W	NET RESISTOR NET RESISTOR	$\Omega\Omega$
R7365	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	RA6546	NRZ0080-0R0X	NET RESISTOR	0Ω
R7366 R7367	NRSA63J-0R0X NRSA63J-221X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 220Ω 1/16W J	RA7202 RA7203	NRZ0080-473X NRZ0080-473X	NET RESISTOR NET RESISTOR	47kΩ 47kΩ
R7368	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	RA7204	NRZ0080-473X	NET RESISTOR	47kΩ
R7369 R7371	NRSA63J-103X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 0Ω 1/16W J	RA7205 RA7503	NRZ0080-473X NQR0271-004X	NET RESISTOR EMI FILTER	47kΩ
R7372	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	11/1/303	NQN0271-004X	LIVII I ILI LIX	
R7501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6101	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
R7502 R7512	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6102 L6103	NQL79GM-220X NQL79GM-220X	COIL COIL	22uH M 22uH M
R7513	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6115	NQR0499-001X	FERRITE BEADS	
R7514 R7515	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6250 L6253	NQLB62J-120X NQLB62J-120X	COIL COIL	12uH J 12uH J
R7523	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6254	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
R7524 R7525	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6265 L6266	NQR0499-001X NQR0499-001X	FERRITE BEADS FERRITE BEADS	
R7529	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	L6402	NQL79GM-100X	COIL	10uH M
R7530	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L6403	NQL79GM-100X	COIL	10uH M
R7532 R7533	NRSA63J-273X NRSA63J-221X	MG RESISTOR MG RESISTOR	27kΩ 1/16W J 220Ω 1/16W J	L6404 L6502	NQL79GM-100X NRSA02J-0R0X	COIL MG RESISTOR	10uH M 0Ω 1/10W J
R7544	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6521	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4
R7601 R7602	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	L6522 L6523	NRZ0034-0R0W NRZ0034-0R0W	NET RESISTOR NET RESISTOR	0Ω 1/32W J x4 0Ω 1/32W J x4
R7634	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	L6523	NQR0199-007X	FERRITE BEADS	052 1/32VV J X4
R7635	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L6701	NQR0413-003X	EMI FILTER	
R7643 R7658	NRSA63J-0R0X NRSA63J-103X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J	L6911 L6912	NQR0499-001X NQR0499-001X	FERRITE BEADS FERRITE BEADS	
R8796	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6922	NQL79GM-220X	COIL	22uH M
R8797 R8798	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6923 L6924	NQL79GM-220X NQL79GM-220X	COIL COIL	22uH M 22uH M
R8799	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6925	NQL79GM-220X NQL79GM-220X	COIL	22uH M
R9001	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	L6931	NQR0499-001X	FERRITE BEADS	
R9002 R9003	NRSA02J-0R0X NRSA63D-273X	MG RESISTOR MG RESISTOR	0Ω 1/10W J 27kΩ 1/16W D	L7301 L7302	NQR0489-002X NQR0489-002X	FERRITE BEADS FERRITE BEADS	
R9004	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	L7303	NQL092K-4R7X	COIL	4.7uH K
R9005 R9006	NRSA63D-103X NRSA63J-512X	MG RESISTOR MG RESISTOR	10kΩ 1/16W D 5.1kΩ 1/16W J	L7304 L7305	NQL092K-4R7X NQL092K-4R7X	COIL COIL	4.7uH K 4.7uH K
R9007	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	L7306	NQL092K-4R7X	COIL	4.7uH K
R9008 R9201	NRSA63J-0R0X NRSA63J-473X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 47kΩ 1/16W J	L7307 L7308	NQL092K-4R7X NQL092K-4R7X	COIL COIL	4.7uH K 4.7uH K
179201	NINOAUJU-413A	INIO INEGIOTUR	71 V22 1/ 10VV J	L1300	NULUSZN-4K/A	OOIL	4./U□ N

ÆRef No.	Part No.	Part Name	Description Loca
L7309 L7310 L7311 L7312 L7313 L7314 L7315 L7316 L7501 L7501 L7502 L9001 L9201	NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NRSA63J-0R0X NRSA63J-0R0X NGL08CM-150X NQL08CM-150X	COIL COIL COIL COIL COIL FERRITE BEADS COIL COIL MG RESISTOR MG RESISTOR COIL COIL	4.7uH K 4.7uH K 4.7uH K 4.7uH K 4.7uH K 4.7uH K 4.7uH K 0Ω 1/16W J 0Ω 1/16W J 15uH M 15uH M
CN001 CN002 J8501 J8502 K6250 K6261 K6263 K6264	QGF0508C2-50W QGF0508C2-40W NNZ0117-001 NNZ0117-001 NRSA02J-0R0X NQR0489-002X NQR0489-002X NQR0489-002X	CONNECTOR CONNECTOR HDMI CONNECTOR HDMI CONNECTOR MG RESISTOR FERRITE BEADS FERRITE BEADS FERRITE BEADS	FFC/FPC (1-50) FFC/FPC (1-40) DIGITAL IN-1 DIGITAL IN-2 0Ω 1/10W J
K6265 K6266 K6267 K6268 K6272 K6401 K6402 K6403	NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NQR0499-001X NQR0499-001X NQR0499-001X NQR0499-001X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR FERRITE BEADS FERRITE BEADS FERRITE BEADS FERRITE BEADS	0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J
K6404 K6405 K6921 K7028 K7030	NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA63J-0R0X NRSA02J-0R0X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR	0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J 0Ω 1/16W J 0Ω 1/10W J
K7031 K7032 K7033 K7034 K7202 K7211 K7302	NQR0470-007X NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA03J-0R0X NQR0499-002X NQR0389-003X	EMI FILTER MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR FERRITE BEADS FERRITE BEADS	0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J 0Ω 1/16W J
K7308 K7501 K7504 LC6501 LC7505 LC9301 LC9303 LC9305 LC9306 LC9307 X6250	NRSA02J-390X NQR0413-002X NRSA63J-0R0X NQR0479-001X NQR0483-005X NQR0470-003X NQR0483-005X NQR0483-005X NQR0483-005X NQR0483-005X NQR0483-005X NAX0580-001X	MG RESISTOR FERRITE BEADS MG RESISTOR EMI FILTER CXO	39Ω 1/10W J 0Ω 1/16W J
X7001 X7309	NAX0669-001X NAX0618-001X	C RESONATOR CRYSTAL	6.000MHz

PRINTED WIRING BOARD PARTS LIST [LT-32DX7BJ/P, LT-32DX7SJ/P]

Part			NING DOAKI DASS'Y (SEL-1241)		_IOI _ 		Part Name	Description Loca
D-AMP P.W. BOARD ASS'Y (SFL-6221A-U2) D-AMP P.W. BOARD ASS'Y (SFL-6221A-U2) REFER TO PARTS LIST IN PAGE 3-12 FOR THIS P.W. BOARD. REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. D-AMP P.W. BOARD ASS'Y (SFL-7206A-U2) REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. D-AMP P.W. BOARD ASS'Y (SFL-8703A-U2) REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. D-AMP P.W. BOARD ASS'Y (SFL-8703A-U2) REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. D-AMP P.W. BOARD ASS'Y (SFL-8703A-U2) REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. D-AMP P.W. BOARD ASS'Y (SFL-9043A-U2) REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. D-AMP P.W. BOARD ASS'Y (SFL-9043A-U2) REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. D-AMP P.W. BOARD ASS'Y (SFL-9043A-U2) REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. D-AMP P.W. BOARD ASS'Y (SFL-9043A-U2) REFER TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD. D-AMP P.W. BOARD ASS'Y (SFL-9043A-U2) D-AMP P.W. BOA			•	-				2000p
D-AMP P.W. BOARD ASS'Y (SFL-6221A-U2) REFER TO PARTS LIST IN PAGE 3-12 FOR THIS P.W. BOARD. BEGINS TO PARTS LIST IN PAGE 3-12 FOR THIS P.W. BOARD. BEGINS TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. DECLAR TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. LED P.W. BOARD ASS'Y (SFL-8703A-U2) REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. DECLAR TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. DECLAR TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. DECLAR TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. DECLAR TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD. DIGITAL P.W. BOARD ASS'Y (SEL 2) SAMPLE TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD. CERT TO PARTS LIST IN PAGE	KEFEK I	IO PARTS LIST IN	PAGE 3-8 FOR THIS P.V	V. BOARD.	Q7301	2SC2412K/QR/-X	CHIP TRANSISTOR	
SEFER TO PARTS LIST IN PAGE 3-12 FOR THIS P.W. BOARD. DB601 SSSSW.X CHP DIDGE CH	D-AMP	P.W. BOARD	ASS'Y (SFL-6221A-I	J2)	Q9502	2SC3928A/QR/-X	TRANSISTOR	
SW P.W. BOARD ASS'Y (SFL-7206A-U2)	REFER T	TO PARTS LIST IN	PAGE 3-12 FOR THIS P.	W. BOARD.	D6503 D7032	1SS355W-X MA111-X	CHIP DIODE CHIP DIODE	
DB201	SW P.W	/. BOARD ASS	S'Y (SFL-7206A-U2)		D9001 D9002	EC30HA03L-X EC30HA03L-X	SB DIODE SB DIODE	
REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD.	REFER T	TO PARTS LIST IN	PAGE 3-13 FOR THIS P.	W. BOARD.	D9201 D9202	EC30HA03L-X EC30HA03L-X	SB DIODE SB DIODE	
C8002 NCB31CK-104X C CAPACITOR D.1uf-16V K C3014 NCB31CK-104X C CAPACITOR D.1uf-16V K D.	LED P.V	W. BOARD AS	S'Y (SFL-8703A-U2))	D9204 D9501	1SS355W-X 1SS355W-X	CHIP DIODE CHIP DIODE	
POWER P.W. BOARD ASS'Y (SFL-9043A-U2)	REFER T	TO PARTS LIST IN	PAGE 3-13 FOR THIS P.	W. BOARD.				
Comparison Com	POWER	R P.W. BOARD	ASS'Y (SFL-9043A	-U2)	C6101 C6103 C6107	NCB30JK-225X NCB31AK-474X NCB31AK-474X	C CAPACITOR C CAPACITOR C CAPACITOR	2.2uF 6.3V K 0.47uF 10V K 0.47uF 10V K
REFER TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD. C8119	REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD.					NCB31CK-104X NCB31CK-104X NCB31AK-474X	C CAPACITOR C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K
REFER TO PARTS LIST IN PAGE 3-14 FOR THIS P.W. BOARD. C8119	DC-DC P.W. BOARD ASS'Y (SFL-9143A-U2)					NCB31CK-104X NCB31AK-474X		
DIGITAL P.W. BOARD ASS'Y	REFER T	TO PARTS LIST IN	PAGE 3-14 FOR THIS P.	W. BOARD.		NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K 0.47uF 10V K
DIGITAL P.W. BOARD ASS'Y					C6119	NCB31AK-474X	C CAPACITOR	0.47uF 10V K
CAPACITOR 1000	DIGITA	L P.W. BOARD	ASS'Y		C6122	NEHL0JM-107X	E CAPACITOR	100uF 6.3V M
Abrel No. Part No. Part Name Description Local C6126 NCB30JK-225X C CAPACITOR 2.2µF 6.3 W K C					C6124	NEHL0JM-107X	E CAPACITOR	100uF 6.3V M
C6001 JCC5060 C	•	, ,	•	Description Local	C6126	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K
C6000					C6130	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K
C6101 EDD1232AAFA-8B C		JCC5060 SN74LVC1G08V-X			C6133	NCB31CK-154X	C CAPACITOR	0.15uF 16V K
C6250 VPC5702GS-027-X C	IC6101	EDD1232AAFA-6B	IC		C6135	NCB31CK-104X	C CAPACITOR	
C6291 K1170F331F-X C	IC6250	UPC5702GS-027-X	IC				C CAPACITOR C CAPACITOR	
C6502	IC6401	ISL98001CQZ-140	IC		C6218	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
IC6724	IC6502	THC63LVDM83R-W	IC		C6237	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
IC7036		S-80928CLNB-G-W	IC		C6239	NCB31CK-104X NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C7201 39VF800A7IEKD73 C(MICRO C ROM) C	IC7036	ADC081S021CIS-X	IČ		C6242	NCB31AK-105X	C CAPACITOR	1uF 10V K
C1/203	IC7201	39VF800A7IEKD73	IC(MICRO C ROM)					
IC	IC7204	S-80928CLNB-G-W	IC		C6245	NCB11AK-106X	C CAPACITOR	10uF 10V K
C7304		SDA6000-B12	IC IC		C6247	NCB11AK-106X	C CAPACITOR	10uF 10V K
IC7305					C6249	NCB31AK-105X	C CAPACITOR	1uF 10V K
IC7502 SN74LVC2G06K-X IC C6253 NCB11AK-106X C CAPACITOR 10UF 10V K IC7602 ATF32-32DX7BJ IC (SERVICE) C6253 NCB11AK-106X C CAPACITOR 10UF 10V K IC7606 MM1671XN-X IC C6254 NCB11AK-106X C CAPACITOR 10UF 10V K IC7606 MM1671XN-X IC C6255 NCB11AK-106X C CAPACITOR 10UF 10V K IC7601 MM1662FT-X IC C6260 NCB21AK-225X C CAPACITOR 2.2uF 10V K IC7601 MP2263DN-C053-X IC C6261 NCB21AK-225X C CAPACITOR 2.2uF 10V K IC7601 MM1701CH-X IC C6262 NCB21AK-225X C CAPACITOR 2.2uF 10V K IC7601 MM1701CH-X IC C6263 NCB21AK-225X C CAPACITOR 2.2uF 10V K IC7601 MM1701CH-X IC C6264 NCB21AK-225X C CAPACITOR 2.2uF 10V K IC7601 MM1701CH-X IC C6264 NCB21AK-225X C CAPACITOR 2.2uF 10V K IC7601 IC	IC7305	MM1689CH-X	IC		C6251	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
IC7606 MM1671XN-X IC C6254 NCB11AK-106X C CAPACITOR 10UF 10V K	IC7502	SN74LVC2G06K-X	IC	(OED)/IOE)			C CAPACITOR	
C90101 MM1662FT-X IC C6260 NCB21AK-225X C CAPACITOR 2.2uF 10V K	IC7606	MM1671XN-X	IC	(SERVICE)			C CAPACITOR C CAPACITOR	
C9201 MIP-2203IN-0.003-X IC C6262 NCB21AK-225X C CAPACITOR 2.2uF 10V K	IC9101	MM1662FT-X	IC		C6260	NCB21AK-225X	C CAPACITOR	2.2uF 10V K
Q6202 2SA1530A/QR/-X TRANSISTOR C6264 NDC31HJ-100X C CAPACITOR 10pF 50V J Q6203 2SA1022/BC/-X TRANSISTOR C6267 NDC31HJ-100X C CAPACITOR 10pF 50V J Q6204 2SA1022/BC/-X TRANSISTOR C6268 NCB31CK-104X C CAPACITOR 0.1uF 16V K Q6205 2SA1022/BC/-X TRANSISTOR C6270 NCB31CK-104X C CAPACITOR 0.1uF 16V K Q6206 2SA1022/BC/-X TRANSISTOR C6271 NCB31CK-104X C CAPACITOR 0.1uF 16V K Q6206 2SA1022/BC/-X TRANSISTOR C6271 NCB31CK-104X C CAPACITOR 0.1uF 16V K Q6206 2SA1022/BC/-X TRANSISTOR C6271 NCB31CK-104X C CAPACITOR 0.1uF 16V K					C6262	NCB21AK-225X	C CAPACITOR	2.2uF 10V K
Q6203 2SA1022/BC/-X TRANSISTOR C6268 NCB31CK-104X C CAPACITOR 0.1uF 16V K Q6204 2SA1022/BC/-X TRANSISTOR C6268 NCB31CK-104X C CAPACITOR 0.1uF 16V K Q6205 2SA1022/BC/-X TRANSISTOR C6270 NCB31CK-104X C CAPACITOR 0.1uF 16V K Q6206 2SA1022/BC/-X TRANSISTOR C6271 NCB31CK-104X C CAPACITOR 0.1uF 16V K Q6206 2SA1022/BC/-X TRANSISTOR C6271 NCB31CK-104X C CAPACITOR 0.1uF 16V K Q6207 NCB31CK-104X C CAPACITOR 0.1uF 16V K Q6208 C5A1022/BC/-X TRANSISTOR C6272 NCB31CK-104X C CAPACITOR 0.1uF 16V K		2SA1530A/OR/-X	TRANSISTOR		C6264	NDC31HJ-100X	C CAPACITOR	10pF 50V J
Q6205 2SA1022/BC/-X TRANSISTOR C6271 NCB31CK-104X C CAPACITOR 0.1uF 16V K Q6206 2SA1022/BC/-X TRANSISTOR C6271 NCB31CK-104X C CAPACITOR 0.1uF 16V K	Q6203	2SA1022/BC/-X	TRANSISTOR		C6268		C CAPACITOR C CAPACITOR	
Q0200 25A1022/BC/-X TRANSISTOR C6272 NICD21CK 104V C CADACITOD 0.1uE 16V/K	Q6205	2SA1022/BC/-X	TRANSISTOR					
Q0211 2505037NNYP-N TRANSISTOR CC272 NICD24CV 404V C CADACITOD 0.41E 46V V	Q6211	2SC3837K/NP/-X	TRANSISTOR		C6272	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q6212 25C3637KNP/-X TRANSISTOR C6274 NCB31CK-104X C CAPACITOR 0.1uF 16V K	Q6212 Q6213	2SC3837K/NP/-X 2SC3837K/NP/-X			C6274	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q6214 2SC3837K/NP/-X TRANSISTOR C6277 NCB31CK-104X C CAPACITOR 0.10F 16V K		2SC3837K/NP/-X			C6277	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q6251 2SC3928A/QR/-X TRANSISTOR C6279 NCB31CK-104X C CAPACITOR 0.1uF 16V K	Q6251	2SC3928A/QR/-X	TRANSISTOR		C6279	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q7030 UN2213-X DIGI TRANSISTOR C0200 NOB31CK-104X C CAPACITOR 0.10F 10V K	Q7030	UN2213-X	DIGI TRANSISTOR		C6280 C6282			
Q7033 UN2113-X DIGITARIOSTOR C6283 NCB31CK-104X C CAPACITOR 0.1uF 16V K	Q7033	UN2113-X	DIGI TRANSISTOR		C6283	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q7034 UN2113-X DIGI TRANSISTOR C6285 NCB31CK-104X C CAPACITOR 0.1uF 16V K			DIGI TRANSISTOR DIGI TRANSISTOR					

⚠Ref No.	Part No.	Part Name	Description Local	Ref No.	Part No.	Part Name	Description Local
C6286	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6644	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6288	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6645	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6289 C6290	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6646	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6290	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6656	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6291	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6657	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6293	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6658	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6294	NBZ0007-107X	SP E CAPACITOR	100uF	C6659	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6295	NBZ0007-107X	SP E CAPACITOR	100uF	C6660	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6296	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6661 C6671	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z
C6297 C6402	NCB11AK-106X NCB11AK-106X	C CAPACITOR C CAPACITOR	10uF 10V K 10uF 10V K	C6672	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z
C6403	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6673	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6406	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6677	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6409	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6678	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6410	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6679	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6411	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6680	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6412	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6681	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6413	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6682	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6414	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6683	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6415	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C6684	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6416	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6685	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6417	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6686	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6418	NCB31CK-104X	C CAPACITOR		C6687	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6419	NCF31CZ-104X	C CAPACITOR	0.1uF 16V K 0.1uF 16V Z	C6688	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6420	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6689	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6422	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6690	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6423	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6691	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6424	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6692	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6425	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6693	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6428	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6694	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6429	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6695	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6430	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6696	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6431	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6697	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6432	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6698	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6433 C6434	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6699 C6701	NCF31CZ-104X NCF11CZ-475X	C CAPACITOR	0.1uF 16V Z 4.7uF 16V Z
C6435	NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	C6723	NCB31HK-222X	C CAPACITOR C CAPACITOR	2200pF 50V K
C6436	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6724	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6437	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6901	NBZ0007-107X	SP E CAPACITOR	100uF
C6438	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6902	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6439	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6903	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6440	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6904	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6441	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6905	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6445	NEX60GM-337X	E CAPACITOR	330uF 4V M	C6906	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6520	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6907	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6521	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6908	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6522	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6909	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6523	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6910	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6524	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6911	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6525	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6912	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6531	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6913	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6533	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6914	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6573	NCB21CK-105X	C CAPACITOR	1uF 16V K	C6915	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6601	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6916	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6917	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6918	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6610	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6919	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6611	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6921	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6612	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6922	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6613	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6923	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6614	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6924	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6615	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6925	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6616	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6926	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6617	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6927	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6618	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6928	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6619	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7030	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6620	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7031	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6621	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7033	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6622	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7039	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C6623	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7040	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6624	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7044	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6625	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7051	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6626	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7052	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6627	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7053	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6628	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7054	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6629	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7055	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6630	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7056	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6631	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7057	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6632	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7058	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6633	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7059	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6634	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7060	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6635	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7061	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6636	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7062	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6637	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7063	NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K
C6638 C6639	NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	C7064 C7065	NCB31CK-104X NCB31CK-104X	C CAPACITOR	0.1uF 16V K 0.1uF 16V K
C6640	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7066	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6641	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7067	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6642 C6643	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7068	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C0043	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7073	NCB31CK-104X	C CAPACITOR	0.1uF 16V K

C7204 NCB31CK-104X C CAPACITOR 0.1uF 16V K C9617 NCF31CZ-104X C CAPACITOR 0.7205 NCB31CK-104X C CAPACITOR 0.1uF 16V K C9619 NCF31CZ-104X C CAPACITOR 0.7206 NCB31CK-104X C CAPACITOR 0.1uF 16V K C9619 NCF31CZ-104X C CAPACITOR 0.7207 NCB31CK-104X C CAPACITOR 0.1uF 16V K C7207 NCB31CK-104X C CAPACITOR 0.1uF 16V K C7208 NCB31CK-104X C CAPACITOR 0.1uF 16V K C7208 NCB31CK-104X C CAPACITOR 0.1uF 16V K R6002 NRSA63J-0R0X MG RESISTOR 0.7209 NCB31CK-104X C CAPACITOR 0.1uF 16V K R6003 NRSA63J-0R0X MG RESISTOR 0.7211 NCB31HK-102X C CAPACITOR 1000pF 50V K R6006 NRSA63J-0R0X MG RESISTOR 0.7211 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6008 NRSA63J-0R0X MG RESISTOR 0.7213 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6009 NRSA63J-220X MG RESISTOR 0.7214 NDC31HJ-102X C CAPACITOR 1000pF 50V J R6014 NRSA63J-0R0X MG RESISTOR 0.7215 NDC31HJ-330X C CAPACITOR 33pF 50V J R6014 NRSA63J-0R0X MG RESISTOR 0.7215 NDC31HJ-330X C CAPACITOR 33pF 50V J R6014 NRSA63J-0R0X MG RESISTOR 0.7215 NDC31HJ-330X C CAPACITOR 0.1uF 16V Z R6018 NRSA63J-0R0X MG RESISTOR 0.7301 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6018 NRSA63J-0R0X MG RESISTOR 0.7302 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7303 NCB11AK-106X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z	1 uF 16V K 0.1 uF 16V Z 0.1 uF 16V Z 0Ω 1/16W J 0Ω 1/16W J
C7204 NCB31CK-104X C CAPACITOR 0.1uF 16V K C9617 NCF31CZ-104X C CAPACITOR 0.7205 NCB31CK-104X C CAPACITOR 0.1uF 16V K C9619 NCF31CZ-104X C CAPACITOR 0.7206 NCB31CK-104X C CAPACITOR 0.1uF 16V K C9621 NCF31CZ-104X C CAPACITOR 0.7207 NCB31CK-104X C CAPACITOR 0.1uF 16V K C9621 NCF31CZ-104X C CAPACITOR 0.7207 NCB31CK-104X C CAPACITOR 0.1uF 16V K C7208 NCB31CK-104X C CAPACITOR 0.1uF 16V K R6002 NRSA63J-0R0X MG RESISTOR 0.7209 NCB31CK-104X C CAPACITOR 0.1uF 16V K R6003 NRSA63J-0R0X MG RESISTOR 0.7211 NCB31HK-102X C CAPACITOR 0.1uF 16V K R6006 NRSA63J-0R0X MG RESISTOR 0.7212 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6006 NRSA63J-0R0X MG RESISTOR 0.7212 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6008 NRSA63J-0R0X MG RESISTOR 0.7213 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6009 NRSA63J-220X MG RESISTOR 0.7214 NDC31HJ-102X C CAPACITOR 0.1uF 50V K R6009 NRSA63J-0R0X MG RESISTOR 0.7215 NDC31HJ-330X C CAPACITOR 1000pF 50V J R6014 NRSA63J-0R0X MG RESISTOR 0.7215 NDC31HJ-330X C CAPACITOR 0.1uF 16V Z R6014 NRSA63J-0R0X MG RESISTOR 0.7301 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6018 NRSA63J-0R0X MG RESISTOR 0.7301 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6018 NRSA63J-0R0X MG RESISTOR 0.7303 NCB11AK-106X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7303 NCB11AK-106X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRS	2.1uF 16V Z 2.116W J
C7206 NCB31CK-104X C CAPACITOR 0.1uF 16V K C9621 NCF31CZ-104X C CAPACITOR 0 C7207 NCB31CK-104X C CAPACITOR 0.1uF 16V K R6002 NRSA63J-0R0X MG RESISTOR 0 C7209 NCB31CK-104X C CAPACITOR 0.1uF 16V K R6003 NRSA63J-0R0X MG RESISTOR 0 C7211 NCB31HK-102X C CAPACITOR 1000pF 50V K R6006 NRSA63J-0R0X MG RESISTOR 0 C7212 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6008 NRSA63J-0R0X MG RESISTOR 0 C7213 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6009 NRSA63J-0R0X MG RESISTOR 0 C7214 NDC31HJ-102X C CAPACITOR 1000pF 50V J R6014 NRSA63J-0R0X MG RESISTOR 0 C7215 NDC31HJ-330X C CAPACITOR 33pF 50V J R6017 NRSA63J-0R0X MG RESISTOR 0 C7301 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6018 NRSA63J-0R0X MG RESISTO	0.1uF 16V Z 0Ω 1/16W J
C7208 NCB31CK-104X C CAPACITOR 0.1uF 16V K R6002 NRSA63J-OROX MG RESISTOR 0.7209 NCB31CK-104X C CAPACITOR 0.1uF 16V K R6003 NRSA63J-OROX MG RESISTOR 0.7211 NCB31HK-102X C CAPACITOR 1000pF 50V K R6006 NRSA63J-OROX MG RESISTOR 0.7212 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6008 NRSA63J-OROX MG RESISTOR 0.7213 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6008 NRSA63J-OROX MG RESISTOR 0.7213 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6009 NRSA63J-OROX MG RESISTOR 0.7214 NDC31HJ-102X C CAPACITOR 1000pF 50V J R6014 NRSA63J-OROX MG RESISTOR 0.7215 NDC31HJ-330X C CAPACITOR 33pF 50V J R6014 NRSA63J-OROX MG RESISTOR 0.7301 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6018 NRSA63J-OROX MG RESISTOR 0.7302 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6018 NRSA63J-OROX MG RESISTOR 0.7303 NCB11AK-106X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-OROX MG RESISTOR 0.7303 NCB11AK-106X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-OROX MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-OROX MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-OROX MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-OROX MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-OROX MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-OROX MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-OROX MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-OROX MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-OROX MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-OROX MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-OROX MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-OROX MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-OROX MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-OROX MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-OROX MG RESISTOR 0.7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-OROX MG RESISTOR 0.7304 NCF31CZ-104X C	0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J 2Ω 1/16W J 0Ω 1/16W J
C7209 NCB31CK-104X C CAPACITOR 0.1uF 16V K R6003 NRSA63J-0R0X MG RESISTOR (C7211 NCB31HK-102X C CAPACITOR 1000pF 50V K R6006 NRSA63J-0R0X MG RESISTOR (C7212 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6008 NRSA63J-0R0X MG RESISTOR (C7213 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6009 NRSA63J-220X MG RESISTOR 22 C7214 NDC31HJ-102X C CAPACITOR 1000pF 50V J R6014 NRSA63J-200X MG RESISTOR (C7215 NDC31HJ-330X C CAPACITOR 33pF 50V J R6017 NRSA63J-0R0X MG RESISTOR (C7301 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6018 NRSA63J-0R0X MG RESISTOR (C7302 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR (C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESIST	0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J 2Ω 1/16W J 0Ω 1/16W J
C7212 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6008 NRSA63J-0R0X MG RESISTOR 0.70 C7213 NCB31HK-104X C CAPACITOR 0.1uF 50V K R6009 NRSA63J-220X MG RESISTOR 22 C7214 NDC31HJ-102X C CAPACITOR 1000pF 50V J R6014 NRSA63J-0R0X MG RESISTOR 0 C7215 NDC31HJ-330X C CAPACITOR 33pF 50V J R6017 NRSA63J-0R0X MG RESISTOR 0 C7301 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6018 NRSA63J-0R0X MG RESISTOR 0 C7302 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR 0 C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6020 NRSA63J-0R0X MG RESISTOR 0 C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR 0	0Ω 1/16W J 2Ω 1/16W J 0Ω 1/16W J 2Ω 1/16W J
C7214 NDC31HJ-102X C CAPACITOR 1000pF 50V J R6014 NRSA63J-0R0X MG RESISTOR (C7215 NDC31HJ-330X C CAPACITOR 33pF 50V J R6017 NRSA63J-0R0X MG RESISTOR (C7301 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6018 NRSA63J-0R0X MG RESISTOR (C7302 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR (C7303 NCB11AK-106X C CAPACITOR 10uF 10V K R6020 NRSA63J-0R0X MG RESISTOR (C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR (0Ω 1/16W J 2Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J
C7215 NDC31HJ-330X C CAPACITOR 33pF 50V J R6017 NRSA63J-0R0X MG RESISTOR (C7301 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6018 NRSA63J-0R0X MG RESISTOR (C7302 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6019 NRSA63J-0R0X MG RESISTOR (C7303 NCB11AK-106X C CAPACITOR 10uF 10V K R6020 NRSA63J-0R0X MG RESISTOR (C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR (0Ω 1/16W J 2Ω 1/16W J
C7303 NCB11AK-106X C CAPACITOR 10uF 10V K R6020 NRSA63J-0R0X MG RESISTOR (C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR (0Ω 1/16W J 2Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J
C7303 NCB11AK-106X C CAPACITOR 10uF 10V K R6020 NRSA63J-0R0X MG RESISTOR (C7304 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6073 NRSA63J-0R0X MG RESISTOR (0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J 2Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J
C7305 NCF31C7-104Y C CAPACITOR 0 11/E 161/7 D6074 NDSA621 0D0Y MC DESISTOR	0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J 2Ω 1/16W J 2Ω 1/16W J 2Ω 1/16W J 2Ω 1/16W J 2Ω 1/16W J 2Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J 2Ω 1/16W J
0.100 100-1104A 0.041 AUTOD 0.10F 10V Z RUUT4 NR3A03J-URUA NIG RESISTOR (0Ω 1/16W J 2Ω 1/16W J 2Ω 1/16W J 2Ω 1/16W J 2Ω 1/16W J 2Ω 1/16W J 2Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J
C7307 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6080 NRSA63J-0R0X MG RESISTOR (2Ω 1/16W J 2Ω 1/16W J 2Ω 1/16W J 2Ω 1/16W J 2Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J 2Ω 1/16W J
C7308 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6101 NRSA63J-220X MG RESISTOR 22	2Ω 1/16W J 2Ω 1/16W J 2Ω 1/16W J 2Ω 1/16W J 2Ω 1/16W J 0Ω 1/16W J 2Ω 1/16W J
C7310 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6103 NRSA63J-220X MG RESISTOR 22	2Ω 1/16W J 2Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J 2Ω 1/16W J
C7312 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6105 NRSA63J-220X MG RESISTOR 22	0Ω 1/16W J 0Ω 1/16W J 2Ω 1/16W J
C7313 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6106 NRSA63J-220X MG RESISTOR 22 C7314 NCB11AK-106X C CAPACITOR 10uF 10V K R6107 NRSA63J-100X MG RESISTOR 10	0Ω 1/16W J 2Ω 1/16W J
C7315 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6108 NRSA63J-100X MG RESISTOR 10	
C7319 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6110 NRSA63J-220X MG RESISTOR 22	2Ω 1/16W J
C7321 NCF31C7-104X C CAPACITOR 0 1uF 16V 7 R6112 NRSA63,I-470X MG RESISTOR 47	2Ω 1/16W J 7Ω 1/16W J
C7324 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6113 NRSA63J-470X MG RESISTOR 47	7Ω 1/16W J
C7326 NDC31HJ-270X C CAPACITOR 27pF 50V J R6115 NRSA63J-470X MG RESISTOR 47	7Ω 1/16W J 7Ω 1/16W J
C7327 NDC31HJ-330X C CAPACITOR 33pF 50V J R6116 NRSA63J-470X MG RESISTOR 47	7Ω 1/16W J 7Ω 1/16W J
C7329 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6118 NRSA63J-470X MG RESISTOR 47	7Ω 1/16W J
C7330 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6119 NRSA63J-470X MG RESISTOR 47 C7331 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6120 NRSA63J-470X MG RESISTOR 47	7Ω 1/16W J 7Ω 1/16W J
	7Ω 1/16W J 7Ω 1/16W J
C7335 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6127 NRSA63J-1R5X MG RESISTOR 1.9 C7338 NEHM1CM-106X E CAPACITOR 10uF 16V M R6141 NRSA63J-0R0X MG RESISTOR 0.10uF 16V M R6141 NRSA63J-0R0X MG R6141 NRSA63	5Ω 1/16W J 0Ω 1/16W J
C7340 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6143 NRSA63J-0R0X MG RESISTOR (0Ω 1/16W J
	0Ω 1/16W J 0Ω 1/16W J
C7343 NCR11AK-106X C CAPACITOR 10uE 10V K R6203 NRSA63 L0R0X MG RESISTOR (0Ω 1/16W J 0Ω 1/16W J
C7345 NCB30JK-225X C CAPACITOR 2.2uF 6.3V K R6207 NRSA63J-0R0X MG RESISTOR (0Ω 1/16W J
C7348 NCF31CZ-104X C CAPACITOR 0.1uF 16V Z R6209 NRSA63J-0R0X MG RESISTOR (0Ω 1/16W J 0Ω 1/16W J
C7349 NCB31HK-102X C CAPACITOR 1000pF 50V K R6212 NRSA63J-0R0X MG RESISTOR (0Ω 1/16W J 0Ω 1/16W J
C7353 NCB31EK-682X C CAPACITOR 6800pF 25V K R6215 NRSA63J-0R0X MG RESISTOR (0Ω 1/16W J
	0Ω 1/16W J 0Ω 1/16W J
C7507 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6219 NRSA63J-0R0X MG RESISTOR (0Ω 1/16W J 0Ω 1/16W J
C7510 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6231 NRSA63J-0R0X MG RESISTOR (0Ω 1/16W J
	0Ω 1/16W J 0Ω 1/16W J
	0Ω 1/16W J 0Ω 1/16W J
C7601 NCB11CK-105X C CAPACITOR 1uF 16V K R6238 NRSA63J-101X MG RESISTOR 100	0Ω 1/16W J
	0Ω 1/16W J 0Ω 1/16W J
	0Ω 1/16W J 0Ω 1/16W J
C9003 NCB31EK-104X C CAPACITOR 0.1uF 25V K R6245 NRSA63J-331X MG RESISTOR 33(0Ω 1/16W J
C9005 NCJ41CK-226X-U C CAPACITOR 22uF 16V K R6249 NRSA63J-333X MG RESISTOR 33I	kΩ 1/16W J kΩ 1/16W J
	0Ω 1/16W J 0Ω 1/16W J
C9010 NCJ41CK-226X-U C CAPACITOR 22uF 16V K R6253 NRSA63J-222X MG RESISTOR 2.2I	kΩ 1/16W J
C9103 NCB11CK-225X C CAPACITOR 2.2uF 16V K R6255 NRSA63J-472X MG RESISTOR 4.7I	0Ω 1/16W J kΩ 1/16W J
	0Ω 1/16W J kΩ 1/16W J
C9204 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6258 NRSA63J-151X MG RESISTOR 150	0Ω 1/16W J
C9206 NDC31HJ-120X C CAPACITOR 12pF 50V J R6260 NRSA63J-0R0X MG RESISTOR (kΩ 1/16W J 0Ω 1/16W J
	kΩ 1/16W J 0Ω 1/16W J
C9211 NCB31HK-473X C CAPACITOR 0.047uF 50V K R6263 NRSA63J-472X MG RESISTOR 4.7I	kΩ 1/16W J
C9303 NCB31HK-103X C CAPACITOR 0.01uF 50V K R6265 NRSA63J-103X MG RESISTOR 10I	0Ω 1/16W J kΩ 1/16W J
	0Ω 1/16W J kΩ 1/16W J
	KΩ 1/16W D

ÆRef No.	Part No.	Part Name	Description Local	ÆRef No.	Part No.	Part Name	Description Local
R6269	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	R7041	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6270	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	R7042	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
R6271	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	R7043	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6271 R6274 R6275	NRSA63D-242X NRSA63J-220X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	22Ω 1/16W J 0Ω 1/16W J	R7045 R7046	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6276	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7047	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6279	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7049	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6280	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	R7051	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6282	NRSA63J-331X NRSA63J-101X	MG RESISTOR MG RESISTOR	330Ω 1/16W J 100Ω 1/16W J	R7052 R7054	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6283 R6284	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7055	NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J
R6285	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7056	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6286	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	R7057	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6287	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	R7058	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6288	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	R7059	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6289	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7060	NRSA63J-154X	MG RESISTOR	150kΩ 1/16W J
R6291	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7061	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6292	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7062	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6292 R6294 R6295	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7063 R7064	NRSA63J-0R0X NRSA63J-103X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J
R6296	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7065	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R6297	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7066	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
R6298	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7067	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
R6299	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	R7068	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6401	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7069	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6401 R6402 R6403	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7070	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6404	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	R7071	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7077	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R6405	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7078	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R6408	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7081	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6409	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7084	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R6410 R6411	NRSA63J-100X NRSA63J-100X	MG RESISTOR MG RESISTOR	10Ω 1/16W J 10Ω 1/16W J	R7085 R7086	NRSA63J-221X NRSA63J-0R0X	MG RESISTOR MG RESISTOR MG RESISTOR	220Ω 1/16W J 0Ω 1/16W J
R6412	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7087	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6414	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7089	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6414 R6415	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7090	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6416	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7091	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6417	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7094	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R6419	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	R7095	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6421	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	R7097	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6423	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7098	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6424	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	R7099	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6425	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7100	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6426	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7103	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6427	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7106	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6428	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7107	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6503	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7109	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6521	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7110	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6522	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7112	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6523	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7113	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6524	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7119	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R6525	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7123	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6529	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7124	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6531	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7125	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6532	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7127	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6534	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7128	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6536	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7131	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6537	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7157	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6538	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7170	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6539	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7173	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6569	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7174	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6575	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7175	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6576	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7176	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6595	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R7177	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6596	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7178	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6599	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7179	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6602	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7187	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6605	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7190	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6607	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7191	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6609	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7192	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6611	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6707	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7202	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6712	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7203	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6713	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7207	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6730	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7208	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6731	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7211	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6732	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6733	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7215	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6921	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7217	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6922	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7221	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6923	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7223	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6924	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7224	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R7030	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7225	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R7031	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7229	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R7032	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	R7230	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R7033	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7231	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R7034	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7232	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J
R7035	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7234	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
R7036	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7235	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R7039	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7237	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J

⚠Ref No.	Part No.	Part Name	Description Local	ÆRef No.	Part No.	Part Name	Description Loca
R7238 R7241	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R9201 R9202	NRSA63J-473X NRSA02J-0R0X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 0Ω 1/10W J
R7243 R7302	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R9203	NRSA63D-302X	MG RESISTOR	3kΩ 1/16W D
R7302 R7303	NRSA63J-472X NRSA63J-472X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 4.7kΩ 1/16W J	R9205 R9206	NRSA63D-103X NRSA63J-332X	MG RESISTOR MG RESISTOR	10kΩ 1/16W D 3.3kΩ 1/16W J
R7304	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R9207	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
R7305 R7309	NRSA63J-472X NRSA63J-472X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 4.7kΩ 1/16W J	R9209 R9302	NRSA63J-0R0X NRSA02J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/10W J
R7310	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R9308	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R7311 R7312	NRSA63J-472X NRSA63J-472X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 4.7kΩ 1/16W J	R9501 R9502	NRSA63J-472X NRSA63J-223X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 22kΩ 1/16W J
R7313	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R9503	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J
R7314 R7315	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	R9504 R9505	NRSA63J-223X NRSA63J-103X	MG RESISTOR MG RESISTOR	22kΩ 1/16W J 10kΩ 1/16W J
R7316	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R9506	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R7317 R7318	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	R9507 R9508	NRSA63J-103X NRSA63J-223X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 22kΩ 1/16W J
R7319	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R9509	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R7320 R7321	NRSA63J-103X NRSA63J-820X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 82Ω 1/16W J	R9510 RA6001	NRSA63J-104X NRZ0080-0R0X	MG RESISTOR NET RESISTOR	100kΩ 1/16W J 0Ω
R7322	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	RA6002	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4
R7323 R7324	NRSA63J-103X NRSA63J-101X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 100Ω 1/16W J	RA6007 RA6008	NRZ0080-0R0X NRZ0080-0R0X	NET RESISTOR NET RESISTOR	$\Omega\Omega$
R7325	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	RA6009	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4
R7327 R7330	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	RA6010 RA6014	NRZ0034-0R0W NRZ0034-0R0W	NET RESISTOR NET RESISTOR	0Ω 1/32W J x4 0Ω 1/32W J x4
R7332	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6101	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4
R7333 R7334	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	RA6102 RA6103	NRZ0080-220X NRZ0040-220X	NET RESISTOR	22Ω 22Ω 1/16W J x4
R7335	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J	RA6103	NRZ0040-220X NRZ0040-220X	NET RESISTOR NET RESISTOR	22Ω 1/16W J x4 22Ω 1/16W J x4
R7337 R7339	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6105	NRZ0080-220X	NET RESISTOR	22Ω 22Ω 1/16W J x4
R7340	NRSA63J-472X NRSA63J-101X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 100Ω 1/16W J	RA6106 RA6107	NRZ0040-220X NRZ0080-220X	NET RESISTOR NET RESISTOR	22Ω
R7341	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6108	NRZ0080-220X	NET RESISTOR	22Ω
R7342 R7343	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	RA6109 RA6110	NRZ0040-470X NRZ0080-470X	NET RESISTOR NET RESISTOR	47Ω 1/16W J x4 47Ω
R7346	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	RA6111	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4
R7347 R7348	NRSA63J-473X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 0Ω 1/16W J	RA6112 RA6113	NRZ0040-470X NRZ0080-470X	NET RESISTOR NET RESISTOR	47Ω 1/16W J x4 47Ω
R7349	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	RA6114 RA6115	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4
R7350 R7351	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	RA6115 RA6116	NRZ0080-470X NRZ0080-470X	NET RESISTOR NET RESISTOR	47Ω 47Ω
R7352	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	RA6401	NRZ0080-330X	NET RESISTOR	33Ω
R7353 R7354	NRSA63J-273X NRSA63J-273X	MG RESISTOR MG RESISTOR	27kΩ 1/16W J 27kΩ 1/16W J	RA6402 RA6403	NRZ0080-330X NRZ0080-330X	NET RESISTOR NET RESISTOR	33Ω 33Ω
R7355 R7356	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6531	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4
R7358	NRSA63J-0R0X NRSA63J-471X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 470Ω 1/16W J	RA6541 RA6542	NRZ0033-0R0W NRZ0080-0R0X	NET RESISTOR NET RESISTOR	$\Omega\Omega$
R7359	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	RA6543	NRZ0033-0R0W	NET RESISTOR NET RESISTOR	ΩΩ
R7363 R7364	NRSA63J-103X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 0Ω 1/16W J	RA6544 RA6545	NRZ0080-0R0X NRZ0033-0R0W	NET RESISTOR NET RESISTOR	$\Omega \Omega \Omega \Omega \Omega$
R7365	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	RA6546	NRZ0080-0R0X	NET RESISTOR	0Ω 47'-0
R7366 R7367	NRSA63J-0R0X NRSA63J-221X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 220Ω 1/16W J	RA7202 RA7203	NRZ0080-473X NRZ0080-473X	NET RESISTOR NET RESISTOR	47kΩ 47kΩ
R7368	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	RA7204	NRZ0080-473X	NET RESISTOR	47kΩ
R7369 R7371	NRSA63J-103X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 0Ω 1/16W J	RA7205 RA7503	NRZ0080-473X NQR0271-004X	NET RESISTOR EMI FILTER	47kΩ
R7372	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	1.0404	NDOAGOLODOV	MO DEGISTOR	00.4/40/4/ 1
R7501 R7502	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6101 L6102	NRSA02J-0R0X NQL79GM-220X	MG RESISTOR COIL	0Ω 1/10W J 22uH M
R7512	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6103	NQL79GM-220X	COIL	22uH M
R7513 R7514	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6115 L6250	NQR0499-001X NQLB62J-120X	FERRITE BEADS COIL	12uH J
R7515	NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6253	NQLB62J-120X	COIL	12uH J
R7523 R7524	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6254 L6265	NRSA02J-0R0X NQR0499-001X	MG RESISTOR FERRITE BEADS	0Ω 1/10W J
R7525	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6266	NQR0499-001X	FERRITE BEADS	40IIM
R7529 R7530	NRSA63J-103X NRSA63J-102X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 1kΩ 1/16W J	L6402 L6403	NQL79GM-100X NQL79GM-100X	COIL COIL	10uH M 10uH M
R7532	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	L6404 L6502	NQL79GM-100X	COIL MG RESISTOR	10uH M
R7533 R7544	NRSA63J-221X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	220Ω 1/16W J 0Ω 1/16W J	L6502 L6521	NRSA02J-0R0X NRZ0034-0R0W	NET RESISTOR	0Ω 1/10W J 0Ω 1/32W J x4
R7601	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	L6522	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4
R7602 R7634	NRSA63J-103X NRSA63J-391X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 390Ω 1/16W J	L6523 L6531	NRZ0034-0R0W NQR0199-007X	NET RESISTOR FERRITE BEADS	0Ω 1/32W J x4
R7635	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L6701	NQR0413-003X	EMI FILTER	
R7643 R7658	NRSA63J-0R0X NRSA63J-103X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J	L6911 L6912	NQR0499-001X NQR0499-001X	FERRITE BEADS FERRITE BEADS	
R8796	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6922	NQL79GM-220X	COIL	22uH M
R8797 R8798	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6923 L6924	NQL79GM-220X NQL79GM-220X	COIL COIL	22uH M 22uH M
R8799	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6925	NQL79GM-220X	COIL	22uH M
R9001 R9002	NRSA63J-473X NRSA02J-0R0X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 0Ω 1/10W J	L6931 L7301	NQR0499-001X NQR0489-002X	FERRITE BEADS FERRITE BEADS	
R9003	NRSA63D-273X	MG RESISTOR	27kΩ 1/16W D	L7302	NQR0489-002X	FERRITE BEADS	4 =
R9004 R9005	NRSA63J-684X NRSA63D-103X	MG RESISTOR MG RESISTOR	680kΩ 1/16W J 10kΩ 1/16W D	L7303 L7304	NQL092K-4R7X NQL092K-4R7X	COIL COIL	4.7uH K 4.7uH K
R9006	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	L7305	NQL092K-4R7X	COIL	4.7uH K
R9007 R9008	NRSA02J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/10W J 0Ω 1/16W J	L7306 L7307	NQL092K-4R7X NQL092K-4R7X	COIL COIL	4.7uH K 4.7uH K
			:: · - · · · ·				******

⚠Ref No.	Part No.	Part Name	Description Loca
L7308 L7309 L7310 L7311 L7312 L7313 L7314 L7315	NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQR0489-002X NQL092K-4R7X	COIL COIL COIL COIL COIL COIL FERRITE BEADS COIL	4.7uH K
L7316 L7501 L7502 L9001 L9201	NQL092K-4R7X NRSA63J-0R0X NRSA63J-0R0X NQLC8CM-150X NQLC8CM-150X	COIL MG RESISTOR MG RESISTOR COIL COIL	15uH M 15uH M
CN001 CN002 J8501 J8502 K6250 K6261 K6263 K6264	QGF0508C2-50W QGF0508C2-40W NNZ0117-001 NNZ0117-001 NRSA02J-0R0X NQR0489-002X NQR0489-002X NQR0489-002X	CONNECTOR CONNECTOR HDMI CONNECTOR HDMI CONNECTOR MG RESISTOR FERRITE BEADS FERRITE BEADS FERRITE BEADS	FFC/FPC (1-50) FFC/FPC (1-40) DIGITAL IN-1 DIGITAL IN-2 0Ω 1/10W J
K6265 K6266 K6267 K6268 K6272 K6401 K6402 K6403	NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NQR0499-001X NQR0499-001X NQR0499-001X NQR0499-001X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR FERRITE BEADS FERRITE BEADS FERRITE BEADS FERRITE BEADS FERRITE BEADS	0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J
K6404 K6405 K6921 K7028 K7030 K7031	NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA63J-0R0X NRSA02J-0R0X NQR0470-007X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR EMI FILTER	0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J 0Ω 1/16W J 0Ω 1/10W J
K7032 K7033 K7034 K7202 K7211 K7302	NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA63J-0R0X NQR0499-002X NQR0389-003X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR FERRITE BEADS FERRITE BEADS	0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J 0Ω 1/16W J
K7308 K7501 K7504 LC6501 LC7505 LC9301 LC9303 LC9305 LC9306 LC9307 X6250	NRSA02J-390X NQR0413-002X NRSA63J-0R0X NQR0479-001X NQR0483-005X NQR0470-003X NQR0483-005X NQR0483-005X NQR0483-005X NQR0483-005X NQR0483-005X NAX0580-001X	MG RESISTOR FERRITE BEADS MG RESISTOR EMI FILTER CXO	39Ω 1/10W J 0Ω 1/16W J
X7001 X7309	NAX0669-001X	C RESONATOR CRYSTAL	6.000MHz

PRINTED WIRING BOARD PARTS LIST [LT-32X70BU, LT-32X70SU]

	ASS'Y (SFL-1242A-U2)		Part No.	Part Name	Description Local
	PAGE 3-27 FOR THIS P.W. BOARD.	Q7301 Q9501 Q9502	2SC2412K/QR/-X UN2213-X 2SC3928A/QR/-X	CHIP TRANSISTOR DIGI TRANSISTOR TRANSISTOR	
D-AMP P.W. BOARD AS	SS'Y (SFL-6221A-U2)	Q9503	2SC3928A/QR/-X	TRANSISTOR	
REFER TO PARTS LIST IN P	PAGE 3-12 FOR THIS P.W. BOARD.	D6503 D7032 D7301 D9001	1SS355W-X 1SS355W-X RB501V-40-X EC30HA03L-X	CHIP DIODE CHIP DIODE SB DIODE SB DIODE	
SW P.W. BOARD ASS'	SW P.W. BOARD ASS'Y (SFL-7206A-U2)			SB DIODE Z DIODE	
REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD.			PTZ3.9B-X EC30HA03L-X EC30HA03L-X PTZ3.9B-X 1SS355W-X	SB DIODE SB DIODE Z DIODE CHIP DIODE	
LED P.W. BOARD ASS'	'Y (SFL-8710A-U2)	D9204 D9501 D9502	1SS355W-X 1SS355W-X	CHIP DIODE CHIP DIODE	
REFER TO PARTS LIST IN P	PAGE 3-31 FOR THIS P.W. BOARD.	C6002 C6101	NCB31CK-104X NCB30JK-225X	C CAPACITOR C CAPACITOR	0.1uF 16V K 2.2uF 6.3V K
POWER P.W. BOARD A	•	C6103 C6107 C6109 C6111	NCB31AK-474X NCB31AK-474X NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR C CAPACITOR C CAPACITOR	0.47uF 10V K 0.47uF 10V K 0.1uF 16V K 0.1uF 16V K
REFER TO PARTS LIST IN P	PAGE 3-13 FOR THIS P.W. BOARD.	C6112 C6113 C6114 C6116	NCB31CK-104X NCB31AK-474X NCB31CK-104X	C CAPACITOR C CAPACITOR C CAPACITOR	0.1uF 16V K 0.47uF 10V K 0.1uF 16V K
DC-DC P.W. BOARD ASS'Y (SFL-9144A-U2)			NCB31AK-474X NCB30JK-225X	C CAPACITOR C CAPACITOR	0.47uF 10V K 2.2uF 6.3V K
REFER TO PARTS LIST IN P	PAGE 3-31 FOR THIS P.W. BOARD.	C6118 C6119	NCB31AK-474X NCB31AK-474X	C CAPACITOR C CAPACITOR	0.47uF 10V K 0.47uF 10V K
		C6121 C6122	NCB31AK-474X NEHL0JM-107X	C CAPACITOR E CAPACITOR	0.47uF 10V K 100uF 6.3V M
DIGITAL P.W. BOARD	ASS'Y (SFL0D257A-U2)	C6123 C6124	NCB31CK-104X NEHL0JM-107X	C CAPACITOR E CAPACITOR	0.1uF 16V K 100uF 6.3V M
⚠Ref No. Part No.	Part Name Description Local	C6125 C6126 C6128	NCB31CK-104X NCB30JK-225X NCB30JK-225X	C CAPACITOR C CAPACITOR C CAPACITOR	0.1uF 16V K 2.2uF 6.3V K 2.2uF 6.3V K
IC6002 SN74LVC1G08V-X IC6101 EDD1232AAFA-6B IC6102 SC2595STRT-X IC6250 UPC5702GS-027-X IC6251 R1170H331B-X IC6401 ISL98001CQZ-140 IC6402 R1170H331B-X IC6502 THC63LVDM83R-W IC6724 S-80928CLNB-G-W IC7036 ADC081S021CIS-X IC7036 ADC081S021CIS-X IC7038 SN74LVC2G17KE-X IC7201 39VF800A71EKD99 IC7203 M12L16161A-7TG IC7204 S-80928CLNB-G-W IC7205 SN74LV00APW-X IC7301 SDA6000-B12 IC7303 K4S641632K-UC75 IC7304 CD74HC4053PW-X IC7305 MM1689CH-X IC7305 SN74LVC2G06K-X IC7602 ATF32-32X70BU IC7602 ATF32-32X70BU IC7604 MM1671XN-X IC9001 MP2263DN-C053-X IC9101 MM1662FT-X IC9201 MP2263DN-C053-X IC9301 MM1701CH-X IC9201 MP2263DN-C053-X IC9301 MM1701CH-X IC9201 MP2263DN-C053-X IC9301 MM1701CH-X IC9201 GE205 SA1022/BC/-X IC9201 SC3928A/QR/-X IC9201 SC3928A/QR/-X IC9201 SC3928A/QR/-X IC9201 SC3928A/QR/-X IC9030 UN2213-X IC9	IC I	C6130 C6132 C6133 C6134 C6135 C6139 C6217 C6218 C6236 C6237 C6238 C6237 C6238 C6241 C6242 C6242 C6243 C6245 C6246 C6247 C6248 C6255 C6260 C6261 C6262 C6263 C6267 C6268 C6270 C6271 C6272 C6273 C6274 C6278 C6277 C6278 C6277 C6278 C6277 C6278 C6277 C6288 C6277 C6288 C6277 C6288 C6277 C6288 C6277 C6288 C6277 C6278 C6277 C6288 C6280 C6280 C6280 C6280 C6285 C6286	NCB30JK-225X NEHL1EM-226X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31HK-104X NCB31HK-104X NCB31HK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-104X NCB31CK-105X NCB31CK-105X NCB11AK-106X NCB31AK-105X NCB11AK-106X NCB31CK-104X	C CAPACITOR E CAPACITOR C CAPACITOR	2.2uF 6.3V K 22uF 25V M 0.15uF 16V K 10uF 10V K 0.1uF 16V K 0.1uF 16V K 0.1uF 50V K 0.1uF 50V K 0.1uF 16V K 0.1uF 16V K 0.1uF 16V K 0.1uF 16V K 10uF 10V K 0.1uF 16V K

⚠Ref No.	Part No.	Part Name	Description Local	Ref No.	Part No.	Part Name	Description Local
C6288	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6645	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6289	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6646	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6290	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6656	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6291	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6657	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6293	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6658	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6294	NBZ0007-107X	SP E CAPACITOR	100uF	C6659	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6295	NBZ0007-107X	SP E CAPACITOR	100uF	C6660	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6296	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6661	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6297 C6402	NCB11AK-106X	C CAPACITOR	10uF 10V K 10uF 10V K	C6671 C6672	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z
C6403	NCB11AK-106X NCB11AK-106X	C CAPACITOR C CAPACITOR	10uF 10V K	C6673	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z
C6406	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6677	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6409	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6678	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6410	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6679	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6411	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6680	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6412	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6681	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6413	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6682	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6414	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6683	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6415	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C6684	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6416	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6685	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6417	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6686	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6418	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6687	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6419	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6688	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6420	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6689	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6422	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6690	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6423	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6691	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6424	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6692	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6425	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6693	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6428	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6694	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6429	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6695	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6430	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6696	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6431	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6697	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6432	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6698	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6433	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6699	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6434	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6701	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z
C6435	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6723	NCB31HK-222X	C CAPACITOR	2200pF 50V K
C6436	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6724	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6437	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6901	NBZ0007-107X	SP E CAPACITOR	100uF
C6438	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6902	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6439 C6440	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6903	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6441	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6904	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6905	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6445	NEX60GM-337X	E CAPACITOR	330uF 4V M	C6906	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6520	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6907	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6521	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6908	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6522	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6909	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6523	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6910	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6524	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6911	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6525	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6912	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6531	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6913	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6533	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6914	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6573	NCB21CK-105X	C CAPACITOR	1uF 16V K	C6915	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6601	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6916	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6917	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6918	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6610	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6919	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6611	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6921	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6612	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6922	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6613	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6923	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6614	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6924	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6615	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6925	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6616	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6926	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6617	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6927	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6618	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6928	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6619	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7030	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6620	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7031	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6621	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7033	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6622	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7039	NCB31HK-102X	C CAPACITOR	1000pF 50V K 10uF 10V K
C6623	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7040	NCB11AK-106X	C CAPACITOR	0.1uF 16V K
C6624	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7044	NCB31CK-104X	C CAPACITOR	
C6625	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7051	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6626	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7052	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6627	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7053	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6628	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7054	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6629	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7055	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6630	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7056	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6631	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7057	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6632	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7058	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6633	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7059	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6634	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7060	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6635	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z	C7061	NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K
C6636 C6637	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	C7062 C7063	NCB31CK-104X NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6638	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7064	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6639	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7065	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6640 C6641	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7066	NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K
C6642	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	C7067 C7068	NCB31CK-104X NCB31CK-104X	C CAPACITOR	0.1uF 16V K 0.1uF 16V K
C6643	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7073	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6644	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7202	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
	5.02 1017			JV_		2 2. 2. 10. 101	

⚠Ref No.	Part No.	Part Name	Description Local	Ref No.	Part No.	Part Name	Description Local
C7203	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9611	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C7204	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9617	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C7204	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9617	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C7205	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9619	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C7206	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9621	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C7207 C7208	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K 0.1uF 16V K	R6002	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7209 C7211	NCB31CK-104X NCB31HK-102X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K 1000pF 50V K	R6003 R6006	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J
C7212	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R6008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7213	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R6009	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7214	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	R6014	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7215	NDC31HJ-330X	C CAPACITOR	33pF 50V J	R6017	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7301	NCF31CZ-104X	C CAPACITOR C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	R6018 R6019	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J 0Ω 1/16W J
C7302 C7303	NCF31CZ-104X NCB11AK-106X	C CAPACITOR	10uF 10V K	R6020	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7304	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6073	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7305	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6074	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7306	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6075	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7307	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6080	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7308	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6101	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7309	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6102	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7310	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6103	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7311	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6104	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7312	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6105	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7313	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6106	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7314 C7315	NCB11AK-106X NCF31CZ-104X	C CAPACITOR C CAPACITOR	10uF 10V K 0.1uF 16V Z	R6107 R6108	NRSA63J-100X NRSA63J-100X	MG RESISTOR MG RESISTOR MG RESISTOR	10Ω 1/16W J 10Ω 1/16W J
C7318 C7319	NCB11AK-106X NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	10uF 10V K 0.1uF 16V Z	R6109 R6110	NRSA63J-220X NRSA63J-220X	MG RESISTOR	22Ω 1/16W J 22Ω 1/16W J
C7320	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6111	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7321		C CAPACITOR	0.1uF 16V Z	R6112	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7324	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6113	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7325	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6114	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7326 C7327 C7328	NDC31HJ-270X NDC31HJ-330X	C CAPACITOR C CAPACITOR	27pF 50V J 33pF 50V J	R6115 R6116	NRSA63J-470X NRSA63J-470X	MG RESISTOR MG RESISTOR	47Ω 1/16W J 47Ω 1/16W J
C7329	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6117	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6118	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7330	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6119	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7331	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6120	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7333	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6121	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7334	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6122	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7335	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6127	NRSA63J-1R5X	MG RESISTOR	1.5Ω 1/16W J
C7338	NEHM1CM-106X	E CAPACITOR	10uF 16V M	R6141	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7340	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6143	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7341	NCB11AK-106X	C CAPACITOR	10uF 10V K	R6201	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7342	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	R6202	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7343	NCB11AK-106X	C CAPACITOR	10uF 10V K	R6203	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7344	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	R6204	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7345	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	R6207	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7346	NCB11AK-106X	C CAPACITOR	10uF 10V K	R6208	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7348	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6209	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7349	NCB31HK-102X	C CAPACITOR	1000pF 50V K	R6212	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7350	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7353	NCB31EK-682X	C CAPACITOR	6800pF 25V K	R6215	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7502	NCB31AK-105X	C CAPACITOR	1uF 10V K	R6216	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7506	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6217	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7507	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6219	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7508	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6230	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7510	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6231	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7513	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	R6232	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7514	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6233	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7515	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6235	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C7517	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6236	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C7601	NCB11CK-105X	C CAPACITOR	1uF 16V K	R6238	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C7620	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	R6239	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C7632	NCB31AK-224X	C CAPACITOR	0.22uF 10V K	R6241	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C9001	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	R6242	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C9002	NCJ41EK-106X-U	C CAPACITOR	10uF 25V K	R6244	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C9003	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	R6245	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C9004	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6248	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
C9005	NCJ41CK-226X-U	C CAPACITOR	0.22uF 16V K	R6249	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
C9006	NDC31HJ-120X	C CAPACITOR	12pF 50V J	R6251	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C9007	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6252	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C9010 C9101	NCJ41CK-226X-U NCB11CK-475X	C CAPACITOR C CAPACITOR C CAPACITOR	22uF 16V K 4.7uF 16V K	R6253 R6254	NRSA63J-222X NRSA63J-151X	MG RESISTOR MG RESISTOR MG RESISTOR	2.2kΩ 1/16W J 150Ω 1/16W J
C9103 C9201	NCB11CK-225X NDC31HJ-102X	C CAPACITOR C CAPACITOR C CAPACITOR	2.2uF 16V K 1000pF 50V J	R6255 R6256	NRSA63J-472X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 0Ω 1/16W J
C9201 C9202 C9204	NCJ41EK-106X-U NCB31HK-103X	C CAPACITOR C CAPACITOR C CAPACITOR	10up 25V K 0.01uF 50V K	R6257 R6258	NRSA63J-222X NRSA63J-151X	MG RESISTOR MG RESISTOR MG RESISTOR	2.2kΩ 1/16W J 150Ω 1/16W J
C9205	NCJ41CK-226X-U	C CAPACITOR	22uF 16V K	R6259	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C9206	NDC31HJ-120X	C CAPACITOR C CAPACITOR	12pF 50V J	R6260	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C9207	NCB31HK-153X		0.015uF 50V K	R6261	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C9208	NCJ41CK-226X-U	C CAPACITOR	22uF 16V K	R6262	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
C9211	NCB31HK-473X	C CAPACITOR	0.047uF 50V K	R6263	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C9302	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	R6264	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C9303	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6265	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C9304	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	R6266	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
C9306	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R6267	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C9501	NCB31CK-105X	C CAPACITOR	1uF 16V K	R6268	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D
C9502	NCB31CK-105X	C CAPACITOR	1uF 16V K	R6269	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D

∆Ref No.	Part No.	Part Name	Description Local	ÆRef No.	Part No.	Part Name	Description Local
R6270	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	R7042	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
R6271 R6274	NRSA63D-242X NRSA63J-220X	MG RESISTOR MG RESISTOR	2.4kΩ 1/16W D 22Ω 1/16W J	R7043 R7045	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6274 R6275	NRSA63J-220X NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7046	NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J
R6276 R6279	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7047 R7049	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6280	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	R7051	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6282 R6283	NRSA63J-331X NRSA63J-101X	MG RESISTOR MG RESISTOR	330Ω 1/16W J 100Ω 1/16W J	R7052 R7054	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6284 R6285	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7055 R7056	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J
R6286	NRSA63J-391X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 390Ω 1/16W J	R7050 R7057	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6287 R6288	NRSA63J-391X NRSA63J-391X	MG RESISTOR MG RESISTOR	390Ω 1/16W J 390Ω 1/16W J	R7058 R7059	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6289	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7060	NRSA63J-154X	MG RESISTOR	150kΩ 1/16W J
R6291 R6292	NRSA63J-473X NRSA63J-473X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 47kΩ 1/16W J	R7061 R7062	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6294 R6295	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7063	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6295 R6296	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7064 R7065	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J
R6297	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7066	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
R6298 R6299	NRSA63J-0R0X NRSA63J-220X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 22Ω 1/16W J	R7067 R7068	NRSA63J-562X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	5.6kΩ 1/16W J 0Ω 1/16W J
R6401	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7069	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6402 R6403 R6404	NRSA63J-473X NRSA63J-471X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 470Ω 1/16W J	R7070 R7071	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6404	NRSA63,I-101X	MG RESISTOR	100Ω 1/16W J	R7077	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R6405 R6408	NRSA63J-103X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 0Ω 1/16W J	R7078 R7081	NRSA63J-102X NRSA63J-473X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 47kΩ 1/16W J
R6409	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7084	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R6410 R6411	NRSA63J-100X NRSA63J-100X	MG RESISTOR MG RESISTOR	10Ω 1/16W J 10Ω 1/16W J	R7085 R7086	NRSA63J-221X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	220Ω 1/16W J 0Ω 1/16W J
R6412 R6414	NRSA63J-103X NRSA63J-102X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 1kΩ 1/16W J	R7087 R7089	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6415 R6416	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7090	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6416 R6417	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	R7091 R7094	NRSA63J-0R0X NRSA63J-101X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 100Ω 1/16W J
R6419	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	R7095	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6421 R6423	NRSA63J-330X NRSA63J-103X	MG RESISTOR MG RESISTOR	33Ω 1/16W J 10kΩ 1/16W J	R7097 R7098	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6424	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	R7099	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6425 R6426	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7100 R7103	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6427	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7106	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6428 R6503	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7107 R7109	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6521	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7110	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6522 R6523	NRSA63J-101X NRSA63J-102X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 1kΩ 1/16W J	R7112 R7113	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6524 R6525	NRSA63J-102X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 0Ω 1/16W J	R7119 R7123	NRSA63J-102X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 0Ω 1/16W J
R6529	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7124	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6531 R6532	NRSA63J-102X NRSA63J-102X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 1kΩ 1/16W J	R7125 R7127	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6534	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7128	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6536 R6537	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7131 R7157	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6538	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7170	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6539 R6569	NRSA63J-473X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 0Ω 1/16W J	R7173 R7174	NRSA63J-0R0X NRSA63J-473X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 47kΩ 1/16W J
R6575 R6576	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7175 R7176	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6595	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R7177	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6596 R6599	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	R7178 R7179	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6602	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7187	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6605 R6607	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	R7190 R7191	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6609	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7192	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6611 R6707	NRSA63J-102X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 0Ω 1/16W J	R7201 R7202	NRSA63J-473X NRSA63J-473X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 47kΩ 1/16W J
R6712	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7203	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6713 R6730	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7207 R7208	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6731 R6732	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7211 R7214	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6733	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7214 R7215	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6921 R6922	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7217 R7221	NRSA63J-473X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 0Ω 1/16W J
R6923	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7223	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6924 R7030	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7224 R7225	NRSA63J-473X NRSA63J-473X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 47kΩ 1/16W J
R7031	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7229	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R7032 R7033	NRSA63J-151X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	150Ω 1/16W J 0Ω 1/16W J	R7230 R7231	NRSA63J-472X NRSA63J-223X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 22kΩ 1/16W J
R7034	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7232	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J
R7035 R7036	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7234 R7235	NRSA63J-682X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	6.8kΩ 1/16W J 0Ω 1/16W J
R7039	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7237	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
R7041	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7238	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J

⚠Ref No.	Part No.	Part Name	Description Local	⚠Ref No.	Part No.	Part Name	Description Loca
R7241 R7243	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R9205 R9206	NRSA63D-103X NRSA63J-332X	MG RESISTOR MG RESISTOR	10kΩ 1/16W D 3.3kΩ 1/16W J
R7302	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R9207	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
R7303 R7304	NRSA63J-472X NRSA63J-472X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 4.7kΩ 1/16W J	R9209 R9302	NRSA63J-0R0X NRSA02J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/10W J
R7305	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R9308	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R7309 R7310	NRSA63J-472X NRSA63J-101X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 100Ω 1/16W J	R9501 R9502	NRSA63J-472X NRSA63J-223X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 22kΩ 1/16W J
R7311	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R9503	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J
R7312 R7313	NRSA63J-472X NRSA63J-103X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 10kΩ 1/16W J	R9504 R9505	NRSA63J-223X NRSA63J-103X	MG RESISTOR MG RESISTOR	22kΩ 1/16W J 10kΩ 1/16W J
R7314	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R9506	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R7315 R7316	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	R9507 R9508	NRSA63J-103X NRSA63J-223X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 22kΩ 1/16W J
R7317	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R9509	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R7318 R7319	NRSA63J-101X NRSA63J-103X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 10kΩ 1/16W J	R9510 RA6001	NRSA63J-104X NRZ0080-0R0X	MG RESISTOR NET RESISTOR	100kΩ 1/16W J 0Ω
R7320	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	RA6002	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4
R7321 R7322	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J	RA6007 RA6008	NRZ0080-0R0X	NET RESISTOR	$\Omega\Omega$ $\Omega\Omega$
R7324	NRSA63J-103X NRSA63J-101X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 100Ω 1/16W J	RA6009	NRZ0080-0R0X NRZ0034-0R0W	NET RESISTOR NET RESISTOR	0Ω 1/32W J x4
R7325	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	RA6010	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4
R7327 R7330	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	RA6014 RA6101	NRZ0034-0R0W NRZ0040-220X	NET RESISTOR NET RESISTOR	0Ω 1/32W J x4 22Ω 1/16W J x4
R7332	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6102	NRZ0080-220X	NET RESISTOR	22Ω
R7333 R7334	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	RA6103 RA6104	NRZ0040-220X NRZ0040-220X	NET RESISTOR NET RESISTOR	22Ω 1/16W J x4 22Ω 1/16W J x4
R7335	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6105	NRZ0080-220X	NET RESISTOR	22Ω
R7337 R7339	NRSA63J-101X NRSA63J-472X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 4.7kΩ 1/16W J	RA6106 RA6107	NRZ0040-220X NRZ0080-220X	NET RESISTOR NET RESISTOR	22Ω 1/16W J x4 22Ω
R7340	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6108	NRZ0080-220X	NET RESISTOR	22Ω
R7341 R7342	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	RA6109 RA6110	NRZ0040-470X NRZ0080-470X	NET RESISTOR NET RESISTOR	47Ω 1/16W J x4 47Ω
R7343	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6111	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4
R7346 R7348	NRSA63J-472X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 0Ω 1/16W J	RA6112 RA6113	NRZ0040-470X NRZ0080-470X	NET RESISTOR NET RESISTOR	47Ω 1/16W J x4 47Ω
R7349	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	RA6114	NRZ0040-470X	NET RESISTOR	47Ω 1/16W J x4
R7350 R7351	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	RA6115 RA6116	NRZ0080-470X NRZ0080-470X	NET RESISTOR NET RESISTOR	47Ω 47Ω
R7352	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	RA6401	NRZ0080-330X NRZ0080-330X	NET RESISTOR	33Ω
R7353 R7354	NRSA63J-273X NRSA63J-273X	MG RESISTOR MG RESISTOR	27kΩ 1/16W J 27kΩ 1/16W J	RA6402 RA6403	NRZ0080-330X NRZ0080-330X	NET RESISTOR NET RESISTOR	33Ω 33Ω
R7355	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6531	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4
R7356 R7358	NRSA63J-0R0X NRSA63J-471X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 470Ω 1/16W J	RA6541 RA6542	NRZ0033-0R0W NRZ0080-0R0X	NET RESISTOR NET RESISTOR	$\Omega \Omega \Omega \Omega$
R7359	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	RA6543	NRZ0033-0R0W	NET RESISTOR	$\Omega\Omega$
R7363 R7364	NRSA63J-103X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 0Ω 1/16W J	RA6544 RA6545	NRZ0080-0R0X NRZ0033-0R0W	NET RESISTOR NET RESISTOR	$0\Omega \ 0\Omega$
R7365	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	RA6546	NRZ0080-0R0X	NET RESISTOR	0Ω
R7366 R7367	NRSA63J-0R0X NRSA63J-221X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 220Ω 1/16W J	RA7202 RA7203	NRZ0080-473X NRZ0080-473X	NET RESISTOR NET RESISTOR	47kΩ 47kΩ
R7368	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	RA7204	NRZ0080-473X	NET RESISTOR	47kΩ
R7369 R7371	NRSA63J-103X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 0Ω 1/16W J	RA7205 RA7503	NRZ0080-473X NQR0271-004X	NET RESISTOR EMI FILTER	47kΩ
R7372	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J				00.4/40/4/ 1
R7501 R7502	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6101 L6102	NRSA02J-0R0X NQL79GM-220X	MG RESISTOR COIL	0Ω 1/10W J 22uH M
R7512	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6103	NQL79GM-220X	COIL	22uH M
R7513 R7514	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6115 L6250	NQR0499-001X NQLB62J-120X	FERRITE BEADS COIL	12uH J
R7515	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6253	NQLB62J-120X	COIL	12uH J
R7523 R7524	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6254 L6265	NRSA02J-0R0X NQR0499-001X	MG RESISTOR FERRITE BEADS	0Ω 1/10W J
R7525	NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J	L6266 L6402	NQR0499-001X NQL79GM-100X	FERRITE BEADS	40uH M
R7529 R7530	NRSA63J-103X NRSA63J-102X	MG RESISTOR	10kΩ 1/16W J 1kΩ 1/16W J	L6403	NQL79GM-100X NQL79GM-100X	COIL COIL	10uH M 10uH M
R7532	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	L6404	NQL79GM-100X	COIL	10uH M
R7533 R7544	NRSA63J-221X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	220Ω 1/16W J 0Ω 1/16W J	L6502 L6521	NRSA02J-0R0X NRZ0034-0R0W	MG RESISTOR NET RESISTOR	0Ω 1/10W J 0Ω 1/32W J x4
R7601	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	L6522	NRZ0034-0R0W	NET RESISTOR NET RESISTOR	0Ω 1/32W J x4
R7602 R7634	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	L6523 L6531	NRZ0034-0R0W NQR0199-007X	FERRITE BEADS	0Ω 1/32W J x4
R7635	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L6701	NQR0413-003X	EMI FILTER	
R7643 R7658	NRSA63J-0R0X NRSA63J-103X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J	L6911 L6912	NQR0499-001X NQR0499-001X	FERRITE BEADS FERRITE BEADS	
R8796	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6922	NQL79GM-220X	COIL	22uH M
R8797 R8798	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6923 L6924	NQL79GM-220X NQL79GM-220X	COIL COIL	22uH M 22uH M
R8799	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6925	NQL79GM-220X	COIL	22uH M
R9001 R9002	NRSA63J-473X NRSA02J-0R0X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 0Ω 1/10W J	L6931 L7301	NQR0499-001X NQR0489-002X	FERRITE BEADS FERRITE BEADS	
R9003	NRSA63D-273X	MG RESISTOR	27kΩ 1/16W D	L7302	NQR0489-002X	FERRITE BEADS	47
R9004 R9005	NRSA63J-684X NRSA63D-103X	MG RESISTOR MG RESISTOR	680kΩ 1/16W J 10kΩ 1/16W D	L7303 L7304	NQL092K-4R7X NQL092K-4R7X	COIL COIL	4.7uH K 4.7uH K
R9006	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	L7305	NQL092K-4R7X	COIL	4.7uH K
R9007 R9008	NRSA02J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/10W J 0Ω 1/16W J	L7306 L7307	NQL092K-4R7X NQL092K-4R7X	COIL COIL	4.7uH K 4.7uH K
R9201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	L7308	NQL092K-4R7X	COIL	4.7uH K
R9202 R9203	NRSA02J-0R0X NRSA63D-302X	MG RESISTOR MG RESISTOR	0Ω 1/10W J 3kΩ 1/16W D	L7309 L7310	NQL092K-4R7X NQL092K-4R7X	COIL COIL	4.7uH K 4.7uH K

Ref No.	Part No.	Part Name	Description Loca
L7311 L7312 L7313	NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X	COIL COIL COIL	4.7uH K 4.7uH K 4.7uH K
L7314 L7315	NQR0489-002X NQL092K-4R7X	FERRITE BEADS COIL	4.7uH K
L7316	NQL092K-4R7X	COIL	4.7uH K
L7501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
L7502	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
L9001	NQLC8CM-150X	COIL	15uH M
L9201	NQLC8CM-150X	COIL	15uH M
CN001	QGF0508C2-50W	CONNECTOR	FFC/FPC (1-50)
CN002	QGF0508C2-40W	CONNECTOR	FFC/FPC (1-40)
J8501 J8502	NNZ0117-001 NNZ0117-001	HDMI CONNECTOR HDMI CONNECTOR	DIGITAL IN-1 DIGITAL IN-2
K6250	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
K6261	NQR0489-002X	FERRITE BEADS	022 1/1044 3
K6263	NQR0489-002X	FERRITE BEADS	
K6264	NQR0489-002X	FERRITE BEADS	
K6265	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
K6266	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
K6267 K6268	NRSA02J-0R0X NRSA02J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/10W J 0Ω 1/10W J
K6272	NQR0499-001X	FERRITE BEADS	022 1/10VV J
K6401	NQR0499-001X	FERRITE BEADS	
K6402	NQR0499-001X	FERRITE BEADS	
K6403	NQR0499-001X	FERRITE BEADS	
K6404	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
K6405	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
K6921 K7028	NRSA02J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/10W J 0Ω 1/16W J
K7020	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
K7031	NQR0470-007X	EMI FILTER	022 1/1017 0
K7032	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
K7033	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
K7034	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
K7202 K7211	NRSA63J-0R0X NQR0499-002X	MG RESISTOR FERRITE BEADS	0Ω 1/16W J
K7211 K7302	NQR0499-002X NQR0389-003X	FERRITE BEADS	
K7308	NRSA02J-390X	MG RESISTOR	39Ω 1/10W J
K7501	NQR0413-002X	FERRITE BEADS	
K7504	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
LC6501	NQR0479-001X	EMI FILTER	
LC7505 LC9301	NQR0483-005X NQR0470-003X	EMI FILTER EMI FILTER	
LC9303	NQR0483-005X	EMI FILTER	
LC9305	NQR0483-005X	EMI FILTER	
LC9306	NQR0483-005X	EMI FILTER	
LC9307	NQR0483-005X	EMI FILTER	
X6250	NAX0580-001X	CXO	0.0001414
X7001 X7309	NAX0669-001X NAX0618-001X	C RESONATOR CRYSTAL	6.000MHz
V1 208	NAV0010-001V	ONTOTAL	

PRINTED WIRING BOARD PARTS LIST [LT-32X70BU/P, LT-32X70SU/P]

ANALOG P.W. BOARD ASS'Y (SFL-1242A-U2)	⚠Ref No.	•	Part Name	Description Loca
REFER TO PARTS LIST IN PAGE 3-27 FOR THIS P.W. BOARD.				2000p 2000
REFER TO PARTS LIST IN PAGE 3-27 FOR THIS P.W. BOARD.	Q7201 Q7301 Q9501	2SC3928A/QR/-X 2SC2412K/QR/-X UN2213-X	TRANSISTOR CHIP TRANSISTOR DIGI TRANSISTOR	
D-AMP P.W. BOARD ASS'Y (SFL-6221A-U2)	Q9502 Q9503	2SC3928A/QR/-X 2SC3928A/QR/-X	TRANSISTOR TRANSISTOR	
REFER TO PARTS LIST IN PAGE 3-12 FOR THIS P.W. BOARD.	D6503	1SS355W-X	CHIP DIODE	
	D7032 D7301	MA111-X RB501V-40-X	CHIP DIODE SB DIODE	
SW P.W. BOARD ASS'Y (SFL-7206A-U2)	D9001 D9002	EC30HA03L-X EC30HA03L-X	SB DIODE SB DIODE	
REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD.	D9003 D9201 D9202	PTZ3.9B-X EC30HA03L-X EC30HA03L-X	Z DIODE SB DIODE SB DIODE	
LED P.W. BOARD ASS'Y (SFL-8710A-U2)	D9203 D9204 D9501	PTZ3.9B-X 1SS355W-X 1SS355W-X	Z DIODE CHIP DIODE CHIP DIODE	
REFER TO PARTS LIST IN PAGE 3-31 FOR THIS P.W. BOARD.	D9502	1SS355W-X	CHIP DIODE	
	C6002	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
	C6101	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K
POWER P.W. BOARD ASS'Y (SFL-9043A-U2)	C6103 C6107	NCB31AK-474X	C CAPACITOR	0.47uF 10V K
REFER TO PARTS LIST IN PAGE 3-13 FOR THIS P.W. BOARD.	C6109	NCB31AK-474X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.47uF 10V K 0.1uF 16V K
THE ENTRY TO TAKE DE LIGHT INTERIOR TO THE TIME BOAND.	C6111	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
	C6112	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
DC-DC P.W. BOARD ASS'Y (SFL-9144A-U2)	C6113	NCB31AK-474X	C CAPACITOR	0.47uF 10V K
	C6114	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
·	C6116	NCB31AK-474X	C CAPACITOR	0.47uF 10V K
	C6117	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K
REFER TO PARTS LIST IN PAGE 3-31 FOR THIS P.W. BOARD.	C6118	NCB31AK-474X	C CAPACITOR	0.47uF 10V K
	C6119	NCB31AK-474X	C CAPACITOR	0.47uF 10V K
	C6121	NCB31AK-474X	C CAPACITOR	0.47uF 10V K
	C6122	NEHL0JM-107X	E CAPACITOR	100uF 6.3V M
DIGITAL P.W. BOARD ASS'Y	C6123	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
	C6124	NEHL0JM-107X	E CAPACITOR	100uF 6.3V M
(LCA10599-62C) (SFL-0D257A)	C6125	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
	C6126	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K
⚠Ref No. Part No. Part Name Description Lo	C6128	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K
IC6001 JCC5060 IC	— C6130	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K
	C6132	NEHL1EM-226X	E CAPACITOR	22uF 25V M
IC6002 SN74LVC1G08V-X IC	C6133	NCB31CK-154X	C CAPACITOR	0.15uF 16V K
IC6101 EDD1232AAFA-6B IC	C6134	NCB11AK-106X	C CAPACITOR	10uF 10V K
IC6102 SC2595STRT-X IC	C6135	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
IC6250 UPC5702GS-027-X IC	C6139	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
IC6251 R1170H331B-X IC	C6217	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
IC6401 ISL98001CQZ-140 IC	C6218	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
IC6402 R1170H331B-X IC	C6236	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
	C6237	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
IC6724 S-80928CLNB-G-W IC	C6238	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
	C6239	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
IC7033 CD74HC4094PW-X IC	C6241	NCB11AK-106X	C CAPACITOR	10uF 10V K
IC7036 ADC081S021CIS-X IC	C6242	NCB31AK-105X	C CAPACITOR	1uF 10V K
IC7038 SN74LVC2G17KE-X IC	C6243	NCB31AK-106X	C CAPACITOR	10uF 10V K
IC7201 39VF800A7IEKD99 IC(MICRO C ROM)	C6244	NCB31AK-105X	C CAPACITOR	1uF 10V K
IC7203 M12L16161A-7TG IC IC7204 S-80928CLNB-G-W IC	C6245 C6246	NCB11AK-106X NCB31AK-105X	C CAPACITOR C CAPACITOR	10uF 10V K 10uF 10V K 1uF 10V K
IC7205 SN74LV00APW-X IC IC7301 SDA6000-B12 IC	C6247	NCB11AK-106X	C CAPACITOR	10uF 10V K
IC7303 K4S641632H-UC75 IC	C6248	NCB31AK-105X	C CAPACITOR	1uF 10V K
IC7304 CD74HC4053PW-X IC	C6249	NCB31AK-105X	C CAPACITOR	1uF 10V K
IC7305 MM1689CH-X IC	C6250	NCB11AK-106X	C CAPACITOR	10uF 10V K
IC7306 S-80928CLNB-G-W IC	C6251	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
IC7502 SN74LVC2G06K-X IC	C6252	NCB11AK-106X	C CAPACITOR	10uF 10V K
IC7602 ATF32-32X70BU IC (SERVICE)	C6253	NCB11AK-106X	C CAPACITOR	10uF 10V K
C7606 MM1671XN-X IC IC9001 MP2263DN-C053-X IC	C6254	NCB11AK-106X	C CAPACITOR	10uF 10V K
	C6255	NCB11AK-106X	C CAPACITOR	10uF 10V K
IC9101 MM1662FT-X IC	C6260	NCB21AK-225X	C CAPACITOR	2.2uF 10V K
	C6261	NCB21AK-225X	C CAPACITOR	2.2uF 10V K
IC9201 MP2263DN-C053-X IC	C6262	NCB21AK-225X	C CAPACITOR	2.2uF 10V K
IC9301 MM1701CH-X IC	C6263	NCB21AK-225X	C CAPACITOR	2.2uF 10V K
Q6202 2SA1530A/QR/-X TRANSISTOR	C6264	NDC31HJ-100X	C CAPACITOR	10pF 50V J
	C6267	NDC31HJ-100X	C CAPACITOR	10pF 50V J
Q6203 2SA1022/BC/-X TRANSISTOR	C6268	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q6204 2SA1022/BC/-X TRANSISTOR	C6270	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q6205 2SA1022/BC/-X TRANSISTOR Q6206 2SA1022/BC/-X TRANSISTOR	C6271 C6272	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q6211 2SC3837K/NP/-X TRANSISTOR	C6273	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q6212 2SC3837K/NP/-X TRANSISTOR		NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q6213 2SC3837K/NP/-X TRANSISTOR	C6274	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q6214 2SC3837K/NP/-X TRANSISTOR	C6276	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q6250 2SC3928A/QR/-X TRANSISTOR	C6277	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q6251 2SC3928A/QR/-X TRANSISTOR	C6278	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q6501 2SC3928A/QR/-X TRANSISTOR	C6279	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
	C6280	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q7030 UN2213-X DIGI TRANSISTOR Q7032 UN2113-X DIGI TRANSISTOR Q7032 UN2143-X DIGI TRANSISTOR	C6282	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
	C6283	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q7033 UN2113-X DIGI TRANSISTOR Q7034 UN2113-X DIGI TRANSISTOR	C6284	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
	C6285	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
Q7035 UN2113-X DIGITRANSISTOR	00200			V W. 10 11

⚠Ref No.	Part No.	Part Name	Description Local	Ref No.	Part No.	Part Name	Description Local
C6286	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6644	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6288	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6645	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6289 C6290	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6646	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6290	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6656	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6291	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6657	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6293	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6658	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6294	NBZ0007-107X	SP E CAPACITOR	100uF	C6659	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6295	NBZ0007-107X	SP E CAPACITOR	100uF	C6660	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6296	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6661 C6671	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z
C6297 C6402	NCB11AK-106X NCB11AK-106X	C CAPACITOR C CAPACITOR	10uF 10V K 10uF 10V K	C6672	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z
C6403	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6673	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6406	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6677	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6409	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6678	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6410	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6679	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6411	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6680	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6412	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6681	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6413	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6682	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6414	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6683	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6415	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C6684	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6416	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6685	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6417	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6686	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6418	NCB31CK-104X	C CAPACITOR		C6687	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6419	NCF31CZ-104X	C CAPACITOR	0.1uF 16V K 0.1uF 16V Z	C6688	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6420	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6689	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6422	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6690	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6423	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6691	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6424	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6692	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6425	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6693	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6428	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6694	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6429	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6695	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6430	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6696	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6431	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6697	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6432	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6698	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C6433 C6434	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6699 C6701	NCF31CZ-104X NCF11CZ-475X	C CAPACITOR	0.1uF 16V Z 4.7uF 16V Z
C6435	NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	C6723	NCB31HK-222X	C CAPACITOR C CAPACITOR	2200pF 50V K
C6436	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6724	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6437	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6901	NBZ0007-107X	SP E CAPACITOR	100uF
C6438	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6902	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6439	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6903	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6440	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6904	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6441	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6905	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6445	NEX60GM-337X	E CAPACITOR	330uF 4V M	C6906	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6520	NCB11AK-106X	C CAPACITOR	10uF 10V K	C6907	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6521	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6908	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6522	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6909	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6523	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6910	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6524	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6911	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6525	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6912	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6531	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6913	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6533	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6914	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6573	NCB21CK-105X	C CAPACITOR	1uF 16V K	C6915	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6601	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6916	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6602	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6917	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6603	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C6918	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6610	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6919	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6611	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6921	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6612	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6922	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6613	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6923	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6614	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6924	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6615	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6925	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6616	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6926	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6617	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6927	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6618	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C6928	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6619	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7030	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6620	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7031	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6621	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7033	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C6622	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7039	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C6623	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7040	NCB11AK-106X	C CAPACITOR	10uF 10V K
C6624	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7044	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6625	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7051	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6626	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7052	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6627	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7053	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6628	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7054	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6629	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7055	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6630	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7056	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6631	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7057	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6632	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7058	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6633	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7059	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6634	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7060	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6635	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7061	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6636	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7062	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6637	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7063	NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K
C6638 C6639	NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	C7064 C7065	NCB31CK-104X NCB31CK-104X	C CAPACITOR	0.1uF 16V K 0.1uF 16V K
C6640	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7066	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6641	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7067	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C6642 C6643	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7068	NCB31CK-104X	C CAPACITOR	0.1uF 16V K
C0043	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	C7073	NCB31CK-104X	C CAPACITOR	0.1uF 16V K

⚠Ref No.	Part No.	Part Name	Description Local	Ref No.	Part No.	Part Name	Description Local
C7202	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9502	NCB31CK-105X	C CAPACITOR	1uF 16V K
C7203	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9611	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C7204	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9617	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C7205	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9619	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C7206	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	C9621	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C7207 C7208	NCB31CK-104X NCB31CK-104X	C CAPACITOR C CAPACITOR	0.1uF 16V K 0.1uF 16V K	R6002	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7209	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	R6003	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7211	NCB31HK-102X	C CAPACITOR	1000pF 50V K	R6006	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7212	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R6008	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7213	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R6009	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7214	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	R6014	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7215 C7301 C7302	NDC31HJ-330X NCF31CZ-104X	C CAPACITOR C CAPACITOR	33pF 50V J 0.1uF 16V Z	R6017 R6018	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
C7303	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6019	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
	NCB11AK-106X	C CAPACITOR	10uF 10V K	R6020	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7304	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6073	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7305	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6074	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7306	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6075	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7307	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6080	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7308	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6101	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7309	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6102	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7310	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6103	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7311 C7312	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	R6104 R6105	NRSA63J-220X NRSA63J-220X	MG RESISTOR	22Ω 1/16W J 22Ω 1/16W J
C7313	NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z	R6106	NRSA63J-220X	MG RESISTOR MG RESISTOR	22Ω 1/16W J
C7314	NCB11AK-106X	C CAPACITOR	10uF 10V K	R6107	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
C7315	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6108	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
C7318	NCB11AK-106X	C CAPACITOR	10uF 10V K	R6109	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7319	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6110	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
C7320	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6111	NRSA63J-220X NRSA63J-470X	MG RESISTOR	22Ω 1/16W J
C7321	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6112	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7324	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6113		MG RESISTOR	47Ω 1/16W J
C7325	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6114	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7326	NDC31HJ-270X	C CAPACITOR	27pF 50V J	R6115	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7326 C7327 C7328	NDC31HJ-330X NCF31CZ-104X	C CAPACITOR C CAPACITOR	33pF 50V J 0.1uF 16V Z	R6116 R6117	NRSA63J-470X NRSA63J-470X	MG RESISTOR MG RESISTOR	47Ω 1/16W J 47Ω 1/16W J
C7329 C7330	NCF31CZ-104X NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6118	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7331	NCF31CZ-104X	C CAPACITOR C CAPACITOR	0.1uF 16V Z 0.1uF 16V Z	R6119 R6120	NRSA63J-470X NRSA63J-470X	MG RESISTOR MG RESISTOR	47Ω 1/16W J 47Ω 1/16W J
C7333	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6121	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6122	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
C7334 C7335 C7338	NCF31CZ-104X NEHM1CM-106X	C CAPACITOR E CAPACITOR	0.1uF 16V Z 10uF 16V M	R6127 R6141	NRSA63J-1R5X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	1.5Ω 1/16W J 0Ω 1/16W J
C7340	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6143	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7341	NCB11AK-106X	C CAPACITOR	10uF 10V K	R6201	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7342	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	R6202	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7343	NCB11AK-106X	C CAPACITOR	10uF 10V K	R6203	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7344	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	R6204	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7345	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	R6207	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7346	NCB11AK-106X	C CAPACITOR	10uF 10V K	R6208	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7348 C7349	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6209	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7349	NCB31HK-102X	C CAPACITOR	1000pF 50V K	R6212	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7350	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	R6214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7353	NCB31EK-682X	C CAPACITOR	6800pF 25V K	R6215	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7502	NCB31AK-105X	C CAPACITOR	1uF 10V K	R6216	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7506	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6217	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7507	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6219	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7508	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6230	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7510	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6231	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7513	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	R6232	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7514	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6233	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C7515	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6235	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C7517	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6236	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C7601	NCB11CK-105X	C CAPACITOR	1uF 16V K	R6238	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C7620	NCF11CZ-475X	C CAPACITOR	4.7uF 16V Z	R6239	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C7632	NCB31AK-224X	C CAPACITOR	0.22uF 10V K	R6241	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C9001	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	R6242	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C9002	NCJ41EK-106X-U	C CAPACITOR	10uF 25V K	R6244	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C9003	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	R6245	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C9004	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6248	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
C9005	NCJ41CK-226X-U	C CAPACITOR	22uF 16V K	R6249	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
C9006	NDC31HJ-120X	C CAPACITOR	12pF 50V J	R6251	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C9007	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6252	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C9010	NCJ41CK-226X-U	C CAPACITOR	22uF 16V K	R6253	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C9101	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	R6254	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
C9103	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	R6255	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C9201	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	R6256	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C9202	NCJ41EK-106X-U	C CAPACITOR	10uF 25V K	R6257	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C9204	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R6258	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
C9205	NCJ41CK-226X-U	C CAPACITOR	22uF 16V K	R6259	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C9206	NDC31HJ-120X	C CAPACITOR	12pF 50V J	R6260	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C9207	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	R6261	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
C9208	NCJ41CK-226X-U	C CAPACITOR	22uF 16V K	R6262	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
C9211	NCB31HK-473X	C CAPACITOR	0.047uF 50V K	R6263	NRSA63J-472X	MG RESISTOR	$4.7 k\Omega$ 1/16W J 0Ω 1/16W J
C9302	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	R6264	NRSA63J-0R0X	MG RESISTOR	
C9303	NCB31HK-103X	C CAPACITOR C CAPACITOR	0.01uF 50V K	R6265	NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J
C9304 C9306	NCB11CK-475X NRSA63J-0R0X	MG RESISTOR	4.7uF 16V K 0Ω 1/16W J	R6266 R6267	NRSA63J-221X NRSA63J-472X	MG RESISTOR	220Ω 1/16W J 4.7kΩ 1/16W J
C9501	NCB31CK-105X	C CAPACITOR	1uF 16V K	R6268	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D

ÆRef No.	Part No.	Part Name	Description Local	ÆRef No.	Part No.	Part Name	Description Local
R6269	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	R7041	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6270	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	R7042	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
R6271	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	R7043	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6271 R6274 R6275	NRSA63D-242X NRSA63J-220X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	22Ω 1/16W J 0Ω 1/16W J	R7045 R7046	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6276	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7047	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6279	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7049	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6280	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	R7051	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6282	NRSA63J-331X NRSA63J-101X	MG RESISTOR MG RESISTOR	330Ω 1/16W J 100Ω 1/16W J	R7052 R7054	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J
R6283 R6284	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7055	NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J
R6285	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7056	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6286	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	R7057	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6287	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	R7058	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6288	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	R7059	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6289	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7060	NRSA63J-154X	MG RESISTOR	150kΩ 1/16W J
R6291	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7061	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6292	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7062	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6292 R6294 R6295	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R7063 R7064	NRSA63J-0R0X NRSA63J-103X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J
R6296	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7065	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R6297	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7066	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
R6298	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7067	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
R6299	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	R7068	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6401	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7069	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6401 R6402 R6403	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7070	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6404	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	R7071	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7077	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R6405	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7078	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R6408	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7081	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6409	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7084	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J
R6410 R6411	NRSA63J-100X NRSA63J-100X	MG RESISTOR MG RESISTOR	10Ω 1/16W J 10Ω 1/16W J	R7085 R7086	NRSA63J-221X NRSA63J-0R0X	MG RESISTOR MG RESISTOR MG RESISTOR	220Ω 1/16W J 0Ω 1/16W J
R6412	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7087	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6414	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7089	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6414 R6415	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7090	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6416	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7091	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6417	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7094	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R6419	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	R7095	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6421	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	R7097	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6423	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7098	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6424	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	R7099	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6425	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7100	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6426	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7103	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6427	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7106	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6428	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7107	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6503	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7109	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6521	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7110	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6522	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7112	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6523	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7113	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6524	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7119	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R6525	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7123	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6529	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7124	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6531	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7125	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6532	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7127	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6534	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7128	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6536	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7131	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6537	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7157	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6538	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7170	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6539	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	R7173	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6569	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7174	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6575	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7175	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6576	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7176	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6595	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	R7177	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6596	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7178	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6599	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7179	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6602	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R7187	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6605	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7190	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6607	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7191	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6609	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R7192	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6611	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6707	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7202	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6712	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7203	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6713	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7207	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6730	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7208	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6731	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7211	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6732	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6733	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7215	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6921	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7217	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6922	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7221	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R6923	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7223	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R6924	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7224	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R7030	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7225	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R7031	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7229	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R7032	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	R7230	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R7033	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7231	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R7034	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7232	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J
R7035	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7234	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
R7036	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R7235	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R7039	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R7237	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J

⚠Ref No.	Part No.	Part Name	Description Local	ÆRef No.	Part No.	Part Name	Description Loca
R7238 R7241	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	R9203 R9205	NRSA63D-302X NRSA63D-103X	MG RESISTOR MG RESISTOR	3kΩ 1/16W D 10kΩ 1/16W D
R7243 R7302	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R9206	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R7302 R7303	NRSA63J-472X NRSA63J-472X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 4.7kΩ 1/16W J	R9207 R9209	NRSA02J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/10W J 0Ω 1/16W J
R7304	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	R9302	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
R7305 R7309	NRSA63J-472X NRSA63J-472X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 4.7kΩ 1/16W J	R9308 R9501	NRSA63J-0R0X NRSA63J-472X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 4.7kΩ 1/16W J
R7310	NRSA63J-101X	MG RESISTOR	4.7ks2 1/16W J 100Ω 1/16W J	R9502	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R7311 R7312	NRSA63J-472X NRSA63J-472X	MG RESISTOR MG RESISTOR	4.7kΩ 1/16W J 4.7kΩ 1/16W J	R9503 R9504	NRSA63J-393X NRSA63J-223X	MG RESISTOR MG RESISTOR	39kΩ 1/16W J 22kΩ 1/16W J
R7313	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	R9505	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R7314 R7315	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	R9506 R9507	NRSA63J-223X NRSA63J-103X	MG RESISTOR MG RESISTOR	22kΩ 1/16W J 10kΩ 1/16W J
R7316	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R9508	NRSA63J-103X NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R7317 R7318	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	R9509 R9510	NRSA63J-103X NRSA63J-104X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 100kΩ 1/16W J
R7319	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	RA6001	NRZ0080-0R0X	NET RESISTOR	ΩΩ
R7320 R7321	NRSA63J-103X NRSA63J-820X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J	RA6002 RA6007	NRZ0034-0R0W	NET RESISTOR NET RESISTOR	0Ω 1/32W J x4 0Ω
R7322	NRSA63J-103X	MG RESISTOR	82Ω 1/16W J 10kΩ 1/16W J	RA6008	NRZ0080-0R0X NRZ0080-0R0X	NET RESISTOR	OΩ
R7324	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6009	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4 0Ω 1/32W J x4
R7325 R7327	NRSA63J-220X NRSA63J-103X	MG RESISTOR MG RESISTOR	22Ω 1/16W J 10kΩ 1/16W J	RA6010 RA6014	NRZ0034-0R0W NRZ0034-0R0W	NET RESISTOR NET RESISTOR	0Ω 1/32W J x4
R7330	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	RA6101	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4
R7332 R7333	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	RA6102 RA6103	NRZ0080-220X NRZ0040-220X	NET RESISTOR NET RESISTOR	22Ω 22Ω 1/16W J x4
R7334	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6104	NRZ0040-220X	NET RESISTOR	22Ω 1/16W J x4
R7335 R7337	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	RA6105 RA6106	NRZ0080-220X NRZ0040-220X	NET RESISTOR NET RESISTOR	22Ω 22Ω 1/16W J x4
R7339	NRSA63.I-472X	MG RESISTOR	4.7kΩ 1/16W J	RA6107	NRZ0080-220X	NET RESISTOR	22Ω
R7340 R7341	NRSA63J-101X NRSA63J-101X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 100Ω 1/16W J	RA6108 RA6109	NRZ0080-220X NRZ0040-470X	NET RESISTOR NET RESISTOR	22Ω 47Ω 1/16W J x4
R7342	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	RA6110	NRZ0080-470X	NET RESISTOR	47Ω
R7343 R7346	NRSA63J-101X NRSA63J-472X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 4.7kΩ 1/16W J	RA6111 RA6112	NRZ0040-470X NRZ0040-470X	NET RESISTOR NET RESISTOR	47Ω 1/16W J x4 47Ω 1/16W J x4
R7348	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	RA6113	NRZ0080-470X	NET RESISTOR	47Ω
R7349 R7350	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	RA6114 RA6115	NRZ0040-470X NRZ0080-470X	NET RESISTOR NET RESISTOR	47Ω 1/16W J x4 47Ω
R7351	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	RA6116	NRZ0080-470X	NET RESISTOR	47Ω
R7352 R7353	NRSA63J-273X NRSA63J-273X	MG RESISTOR MG RESISTOR	27kΩ 1/16W J 27kΩ 1/16W J	RA6401 RA6402	NRZ0080-330X NRZ0080-330X	NET RESISTOR NET RESISTOR	33Ω 33Ω
R7354	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	RA6403	NRZ0080-330X	NET RESISTOR	33Ω
R7355 R7356	NRSA63J-101X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	100Ω 1/16W J 0Ω 1/16W J	RA6531 RA6541	NRZ0034-0R0W NRZ0033-0R0W	NET RESISTOR NET RESISTOR	0Ω 1/32W J x4 0Ω
R7358	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	RA6542	NRZ0080-0R0X	NET RESISTOR	$\Omega\Omega$
R7359 R7363	NRSA63J-0R0X NRSA63J-103X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J	RA6543 RA6544	NRZ0033-0R0W NRZ0080-0R0X	NET RESISTOR NET RESISTOR	$0\Omega \ 0\Omega$
R7364	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	RA6545	NRZ0033-0R0W	NET RESISTOR	Ω 0
R7365 R7366	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	RA6546 RA7202	NRZ0080-0R0X NRZ0080-473X	NET RESISTOR NET RESISTOR	0Ω 47kΩ
R7367	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	RA7203	NRZ0080-473X	NET RESISTOR	47kΩ
R7368 R7369	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	RA7204 RA7205	NRZ0080-473X NRZ0080-473X	NET RESISTOR NET RESISTOR	47kΩ 47kΩ
R7371	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	RA7503	NQR0271-004X	EMI FILTER	TTNG
R7372 R7501	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6101	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
R7502	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6102	NQL79GM-220X	COIL	22uH M
R7512 R7513	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6103 L6115	NQL79GM-220X NQR0499-001X	COIL FERRITE BEADS	22uH M
R7514	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6250	NQLB62J-120X	COIL	12uH J
R7515 R7523	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6253 L6254	NQLB62J-120X NRSA02J-0R0X	COIL MG RESISTOR	12uH J 0Ω 1/10W J
R7524	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6265	NQR0499-001X	FERRITE BEADS	022 1/10 00 0
R7525 R7529	NRSA63J-0R0X NRSA63J-103X	MG RESISTOR MG RESISTOR	0Ω 1/16W J 10kΩ 1/16W J	L6266 L6402	NQR0499-001X NQL79GM-100X	FERRITE BEADS COIL	10uH M
R7530	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L6403	NQL79GM-100X	COIL	10uH M
R7532 R7533	NRSA63J-273X NRSA63J-221X	MG RESISTOR MG RESISTOR	27kΩ 1/16W J 220Ω 1/16W J	L6404 L6502	NQL79GM-100X NRSA02J-0R0X	COIL MG RESISTOR	10uH M 0Ω 1/10W J
R7544	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6502	NRZ0034-0R0W	NET RESISTOR	0Ω 1/32W J x4
R7601 R7602	NRSA63J-103X NRSA63J-103X	MG RESISTOR MG RESISTOR	10kΩ 1/16W J 10kΩ 1/16W J	L6522 L6523	NRZ0034-0R0W NRZ0034-0R0W	NET RESISTOR NET RESISTOR	0Ω 1/32W J x4 0Ω 1/32W J x4
R7634	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	L6531	NQR0199-007X	FERRITE BEADS	052 1/32 VV 3 X4
R7635 R7643	NRSA63J-102X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	1kΩ 1/16W J 0Ω 1/16W J	L6701 L6911	NQR0413-003X NQR0499-001X	EMI FILTER FERRITE BEADS	
R7658	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	L6912	NQR0499-001X	FERRITE BEADS	
R8796	NRSA63J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/16W J	L6922	NQL79GM-220X	COIL COIL	22uH M
R8797 R8798	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J 0Ω 1/16W J	L6923 L6924	NQL79GM-220X NQL79GM-220X	COIL	22uH M 22uH M
R8799	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	L6925	NQL79GM-220X	COIL	22uH M
R9001 R9002	NRSA63J-473X NRSA02J-0R0X	MG RESISTOR MG RESISTOR	47kΩ 1/16W J 0Ω 1/10W J	L6931 L7301	NQR0499-001X NQR0489-002X	FERRITE BEADS FERRITE BEADS	
R9003	NRSA63D-273X	MG RESISTOR	27kΩ 1/16W D	L7302	NQR0489-002X	FERRITE BEADS	47.1117
R9004 R9005	NRSA63J-684X NRSA63D-103X	MG RESISTOR MG RESISTOR	680kΩ 1/16W J 10kΩ 1/16W D	L7303 L7304	NQL092K-4R7X NQL092K-4R7X	COIL COIL	4.7uH K 4.7uH K
R9006	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	L7305	NQL092K-4R7X	COIL	4.7uH K
R9007 R9008	NRSA02J-0R0X NRSA63J-0R0X	MG RESISTOR MG RESISTOR	0Ω 1/10W J 0Ω 1/16W J	L7306 L7307	NQL092K-4R7X NQL092K-4R7X	COIL COIL	4.7uH K 4.7uH K
R9201	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	L7308	NQL092K-4R7X	COIL	4.7uH K
R9202	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	L7309	NQL092K-4R7X	COIL	4.7uH K

ÆRef No.	Part No.	Part Name	Description Loc
L7310 L7311 L7312 L7313 L7314 L7315 L7316 L7501 L7502 L9001 L9201	NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQL092K-4R7X NQR0489-002X NQL092K-4R7X NQL092K-4R7X NRSA63J-0R0X NRSA63J-0R0X NQLC8CM-150X NQLC8CM-150X	COIL COIL COIL COIL FERRITE BEADS COIL COIL MG RESISTOR MG RESISTOR COIL COIL	4.7uH K 4.7uH K 4.7uH K 4.7uH K 4.7uH K 0Ω 1/16W J 0Ω 1/16W J 15uH M 15uH M
CN001 CN002 J8501 J8502 K6250 K6261 K6263	QGF0508C2-50W QGF0508C2-40W NNZ0117-001 NNZ0117-001 NRSA02J-0R0X NQR0489-002X NQR0489-002X	CONNECTOR CONNECTOR HDMI CONNECTOR HDMI CONNECTOR MG RESISTOR FERRITE BEADS FERRITE BEADS	FFC/FPC (1-50) FFC/FPC (1-40) DIGITAL IN-1 DIGITAL IN-2 0Ω 1/10W J
K6264 K6265 K6266 K6267 K6268 K6272 K6401 K6402 K6403	NQR0489-002X NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NQR0499-001X NQR0499-001X NQR0499-001X NQR0499-001X	FERRITE BEADS MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR FERRITE BEADS FERRITE BEADS FERRITE BEADS FERRITE BEADS FERRITE BEADS	0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J
K6404 K6405 K6921 K7028 K7030	NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA63J-0R0X NRSA02J-0R0X	MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR	0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J 0Ω 1/16W J 0Ω 1/10W J
K7031 K7032 K7033 K7034 K7202 K7211 K7302	NQR0470-007X NRSA02J-0R0X NRSA02J-0R0X NRSA02J-0R0X NRSA63J-0R0X NQR0499-002X NQR0389-003X	EMI FILTER MG RESISTOR MG RESISTOR MG RESISTOR MG RESISTOR FERRITE BEADS FERRITE BEADS	0Ω 1/10W J 0Ω 1/10W J 0Ω 1/10W J 0Ω 1/16W J
K7308 K7501 K7504 LC6501 LC7505 LC9301 LC9303 LC9305 LC9306 LC9307	NRSA02J-390X NQR0413-002X NRSA63J-0R0X NQR0479-001X NQR0479-003X NQR0483-005X NQR0483-005X NQR0483-005X NQR0483-005X NQR0483-005X	MG RESISTOR FERRITE BEADS MG RESISTOR EMI FILTER	39Ω 1/10W J 0Ω 1/16W J
X6250 X7001 X7309	NAX0580-001X NAX0669-001X NAX0618-001X	CXO C RESONATOR CRYSTAL	6.000MHz


REMOTE CONTROL UNIT PARTS LIST (RM-C1900S-1C) (RM-C1905S-1C)

\triangle	Ref.No.	Part No.	Part Name	Description	Local
	001	10032-0023000	BATTERY COVER		

PACKING PARTS LIST [26 inch models]

⚠Ref.No.Part No. Part Name		Part Name	Description	Local
001 002 002 002 002 002 002 002 002 003	GA10002-076A-U GA10142-020B-U GA10142-021B-U GA10142-022B-U GA10142-023B-U GA10142-028B-U GA10142-029B-U GA10142-030B-U GA10142-031B-U GA10162-001A-U	PACKING CASE EURO LABEL CUSHION ASSY	6pcs in 1set	LT-26DX7BJ LT-26DX7BJP LT-26DX7SJ LT-26DX7SJP LT-26X70BU LT-26X70BUP LT-26X70SU LT-26X70SUP
004 005 005 006 007 007 008 009	GA10165-001A-U RM-C1905S-1C RM-C1900S-1C 	FOAM SHEET REMOCON UNIT REMOCON UNIT BATTERY SPACER PAD SPACER PAD STAND BOX STAND SHEET	AAA/R03(x2)	LT-26DX7BJ,LT-26DX7BJP,LT-26DX7SJ,LT-26DX7SJP LT-26X70BU,LT-26X70BUP,LT-26X70SU,LT-26X70SUP LT-26DX7BJ,LT-26DX7BJP,LT-26DX7SJ,LT-26DX7SJP LT-26X70BU,LT-26X70BUP,LT-26X70SU,LT-26X70SUP
010 011 ▲012 ▲012 ▲013 014 ▲015 016	GA30007-001A-U	DOCUMENT BAGS WARRANTY CARD INST BOOK INST BOOK REGISTRATION CARD DOCUMENT BAGS INST BOOK CAUTION SHEET	BT-54027-1E English English/German/French/Dutch/Spanish/Italian/Portuguese Norwegian/Finnish/Danish/Swedish	LT-26DX7BJ,LT-26DX7BJP,LT-26DX7SJ,LT-26DX7SJP LT-26X70BU,LT-26X70BUP,LT-26X70SU,LT-26X70SUP LT-26DX7BJ,LT-26DX7BJP,LT-26DX7SJ,LT-26DX7SJP LT-26X70BU,LT-26X70BUP,LT-26X70SU,LT-26X70SUP LT-26X70BU,LT-26X70BUP,LT-26X70SU,LT-26X70SUP

PACKING

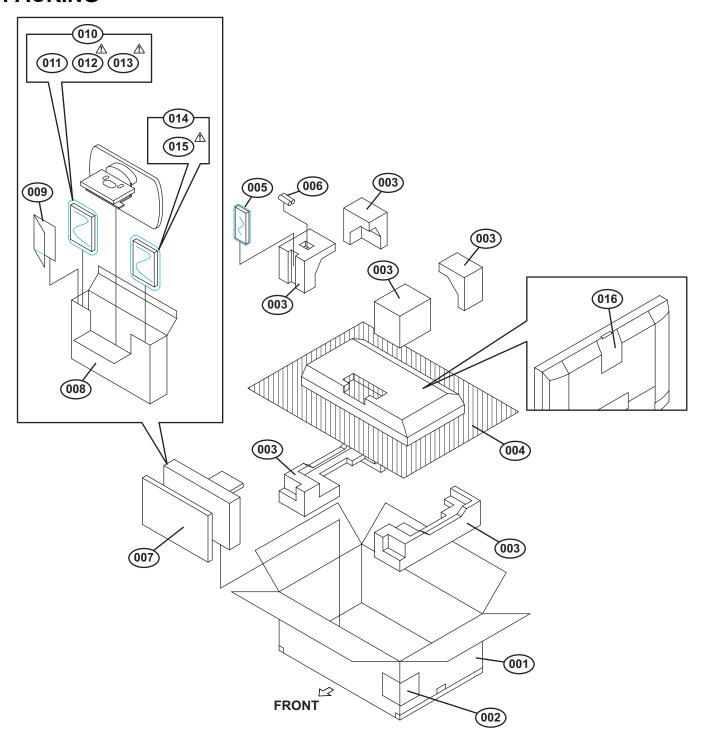

PACKING PARTS LIST [32 inch models]

⚠Ref.No.Part No. Pa		Part Name	Description	Local	
001	GA10002-077A-U	PACKING CASE			
002	GA10142-024B-U	EURO LABEL		LT-32DX7BJ	
002	GA10142-025B-U	EURO LABEL		LT-32DX7BJP	
002	GA10142-026B-U	EURO LABEL		LT-32DX7SJ	
002	GA10142-027B-U	EURO LABEL		LT-32DX7SJP	
002	GA10142-032B-U	EURO LABEL		LT-32X70BU	
002	GA10142-033B-U	EURO LABEL		LT-32X70BUP	
002	GA10142-034B-U	EURO LABEL		LT-32X70SU	
002	GA10142-035B-U	EURO LABEL	Anna in Anak	LT-32X70SUP	
003 004	GA10163-001A-U	CUSHION ASSY	4pcs in 1set		
004	GA10026-002A-U RM-C1905S-1C	FOAM BAG REMOCON UNIT		LT-32DX7BJ.LT-32DX7BJP.LT-32DX7SJ.LT-32DX7SJP	
005	RM-C1900S-1C	REMOCON UNIT		LT-32DX760,E1-32DX760F,E1-32DX750,E1-32DX750F LT-32X70BU,LT-32X70BUP,LT-32X70SU,LT-32X70SUP	
005	LCT2103-001A-U	STAND SHEET		LI-32/1000,LI-32/10001,LI-32/1000,LI-32/10001	
007	GA30007-001A-U	DOCUMENT BAGS			
008		WARRANTY CARD	BT-54027-1E	LT-32DX7BJ.LT-32DX7BJP.LT-32DX7SJ.LT-32DX7SJP	
1009	LCT2016-001A-U	INST BOOK	English	LT-32DX7BJ,LT-32DX7BJP,LT-32DX7SJ,LT-32DX7SJP	
₫010	GA30011-001A-U	REGISTRATION CARD	g	LT-32DX7BJ,LT-32DX7BJP,LT-32DX7SJ,LT-32DX7SJP	
011		BATTERY	AAA/R03(x2)	LT-32DX7BJ.LT-32DX7BJP.LT-32DX7SJ.LT-32DX7SJP	
 ∆ 012	LCT2018-001A-U	INST BOOK	Norwegian/Finnish/Danish/Swedish	LT-32X70BU,LT-32X70BUP,LT-32X70SU,LT-32X70SUP	
△013	LCT2019-001A-U	INST BOOK	Russian/Polish/Czech/Hungarian/Rumanian/Bulgarian	LT-32X70BU,LT-32X70BUP,LT-32X70SU,LT-32X70SUP	
014	GA30007-001A-U	DOCUMENT BAGS	·	LT-32X70BU,LT-32X70BUP,LT-32X70SU,LT-32X70SUP	
015		WARRANTY CARD	BT-54027-1E	LT-32X70BU,LT-32X70BUP,LT-32X70SU,LT-32X70SUP	
∆ 016	LCT2017-001A-U	INST BOOK	English/German/French/Dutch/Spanish/Italian/Portuguese	LT-32X70BU,LT-32X70BUP,LT-32X70SU,LT-32X70SUP	
017		BATTERY	AAA/R03(x2)	LT-32X70BU,LT-32X70BUP,LT-32X70SU,LT-32X70SUP	
018	LCT1504-001A-U	CAUTION SHEET			

PACKING

